





*World Leader in Rating Technology*

# OFFSHORE RACING CONGRESS

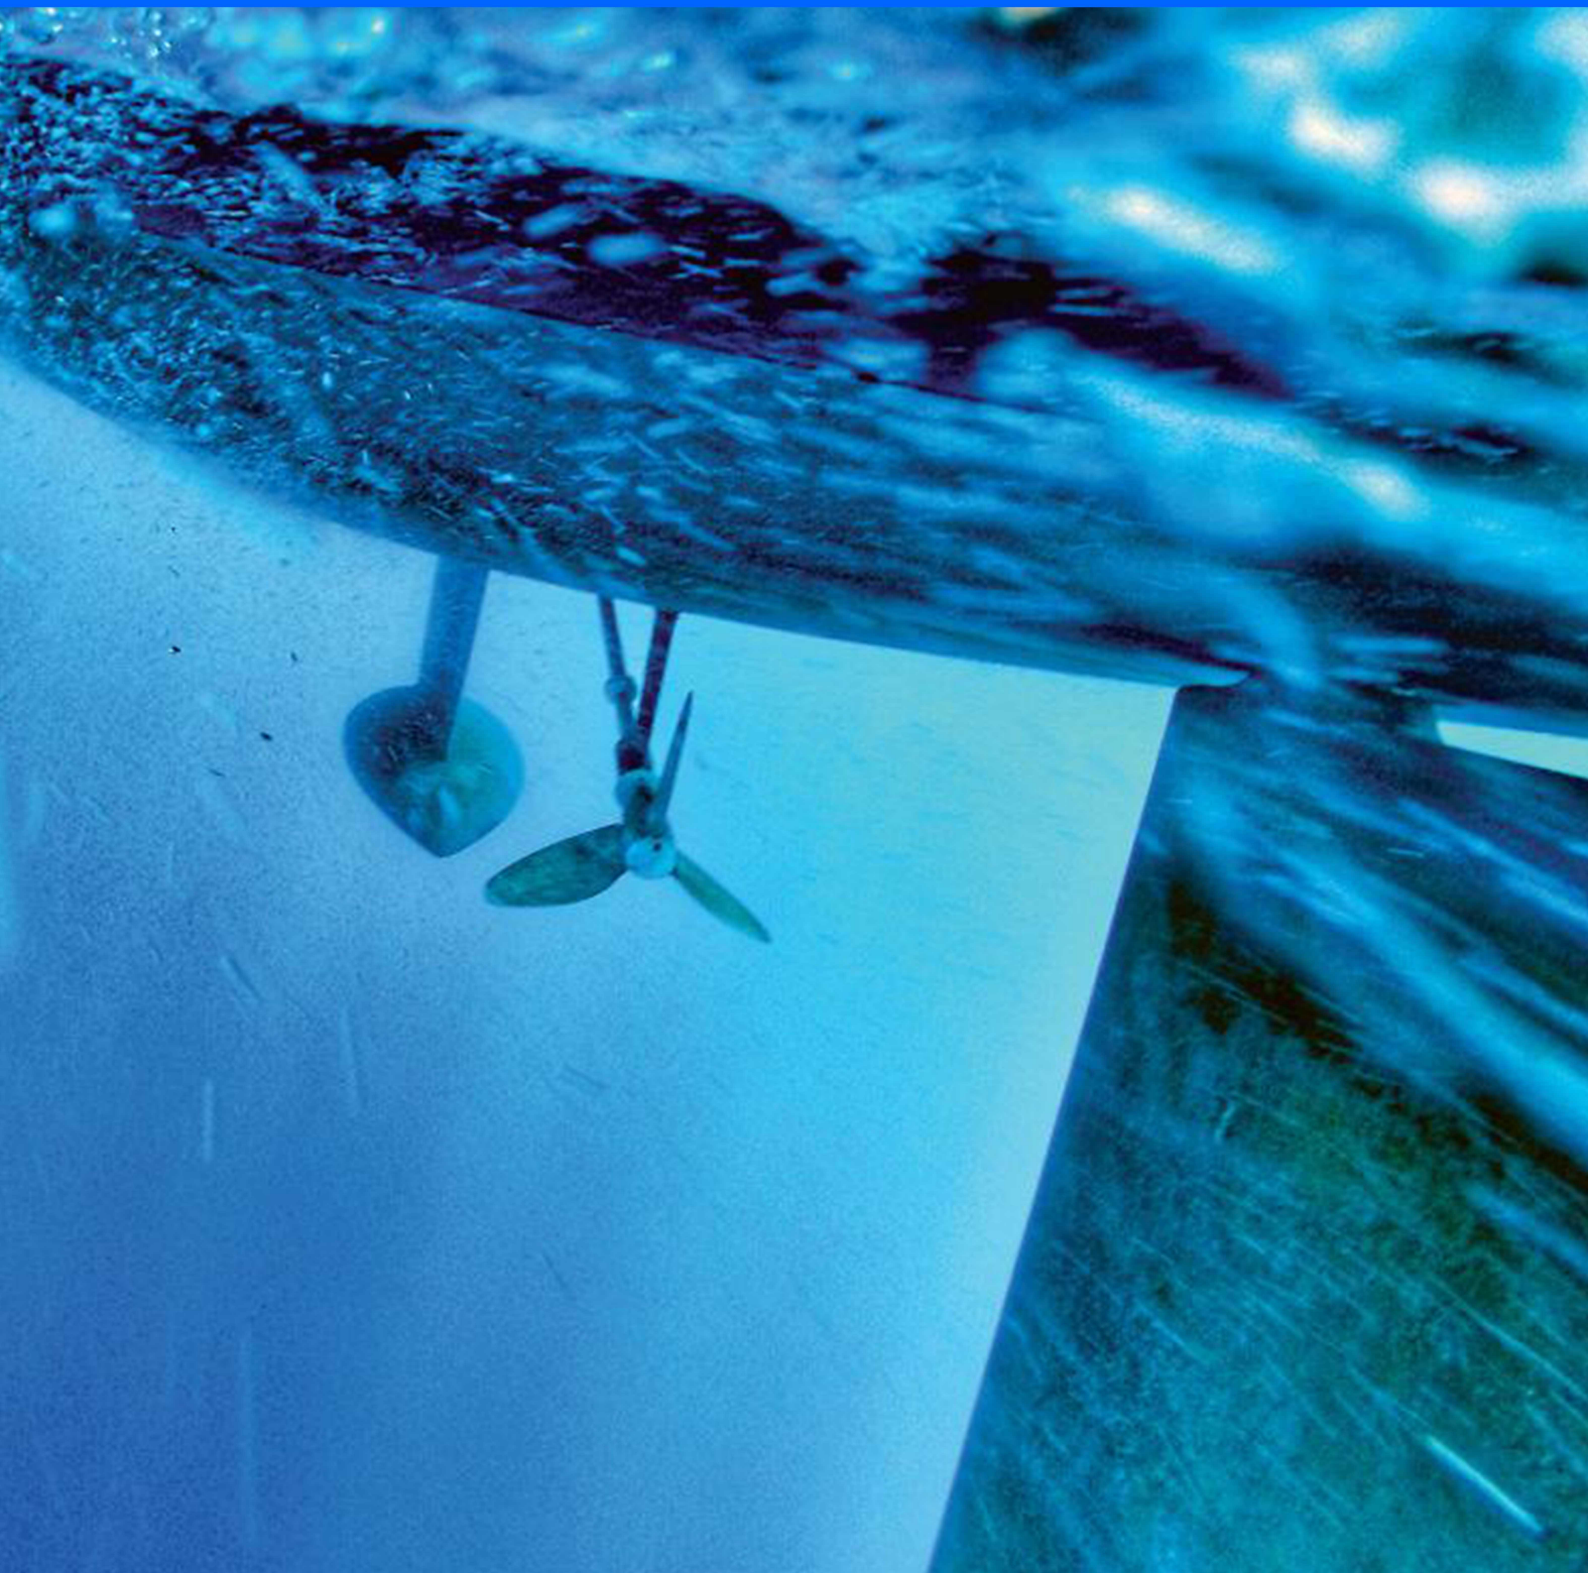

## ORC VPP Documentation 2022

Copyright © 2022 Offshore Racing Congress

All rights reserved. Reproduction in whole or in part is  
only with the permission of the Offshore Racing Congress.



# CONTENTS

<b>1</b>	<b>Background</b>	<b>9</b>
<b>2</b>	<b>Introduction</b>	<b>10</b>
2.1	Scope . . . . .	10
2.2	Overview . . . . .	10
2.3	Layout . . . . .	10
<b>3</b>	<b>VPP Methodology</b>	<b>11</b>
3.1	Solution Method . . . . .	11
3.2	Boat Model . . . . .	12
3.2.1	Functional relationships . . . . .	13
3.3	Equations of Equilibrium . . . . .	15
3.3.1	Driving Force - Drag . . . . .	15
3.3.2	Heeling Moment - Rolling Moment . . . . .	16
3.4	Water Ballast and Canting Keel Yachts . . . . .	17
3.4.1	Canting Keel . . . . .	17
3.4.2	Daggerboard (Centreline lifting appendage) . . . . .	17
3.4.3	Daggerboard and Bilge boards . . . . .	17
3.4.4	Water ballast . . . . .	18
3.4.5	Measurement . . . . .	18
3.5	Dynamic Allowance (DA) . . . . .	18
3.5.1	Credits (2012) . . . . .	19
3.5.2	Calculation Procedure . . . . .	19
3.6	Non Manual Power . . . . .	19
<b>4</b>	<b>Lines Processing Program</b>	<b>21</b>
4.1	Hydrostatics . . . . .	21
4.2	LPP Output parameter definitions . . . . .	22
4.2.1	Measurement Trim . . . . .	22
4.2.2	Sailing Trim . . . . .	22
4.2.3	Second Moment Length (LSM) . . . . .	23
4.2.4	Appendage stripping . . . . .	24
4.2.5	Beam Depth Ratio (BTR) . . . . .	24
4.2.6	Maximum Effective Draft (MHSD) . . . . .	24
4.2.7	Bulb/Wing Effects . . . . .	26
4.3	Appendage wetted areas and lengths . . . . .	28
4.3.1	Conventional Fin keel and rudder . . . . .	28
4.3.2	Other appendages . . . . .	29
4.4	Righting Moment . . . . .	29
4.4.1	Righting Arm Curve . . . . .	29
4.4.2	Hydrodynamic Centre of Pressure . . . . .	29
4.4.3	Crew righting moment . . . . .	30
4.4.4	Dynamic Righting Moment, RMV . . . . .	32
4.4.5	Rated Righting Moment . . . . .	32

<b>5</b>	<b>Aerodynamic Forces</b>	<b>34</b>
5.1	Methodology	34
5.1.1	Individual Sail Areas and 2-Dimensional Aerodynamic Force Coefficients	34
5.1.2	Simplified Rigging Coefficients	35
5.1.3	Optimization and De-powering	36
5.2	Sail Areas & Coefficients	38
5.2.1	Mainsail	38
5.2.2	Jib or Genoa	41
5.2.3	Spinnakers	44
5.2.4	Spinnaker tack position <i>Power Function</i>	46
5.2.5	Headsails set flying	47
5.3	Windage Forces	49
5.3.1	Rigging	50
5.4	Total Aerodynamic Lift and Drag	50
5.4.1	Lift and Drag of complete sail set	51
5.4.2	Center of Effort Height	52
5.4.3	Induced Drag	52
5.4.4	Twist Function	54
5.5	Resolution of Forces	55
5.5.1	<i>PHI<sub>UP</sub></i>	55
5.5.2	Thrust and Heeling Force	55
5.5.3	Aerodynamic heeling Moment	56
5.6	Blanketing functions	56
5.6.1	Mainsail	56
5.6.2	Jib	56
5.6.3	Mizzen, Jib Downwind, Spinnaker	56
5.6.4	Mizzen Staysail	56
<b>6</b>	<b>Hydrodynamic Forces</b>	<b>57</b>
6.1	Viscous Resistance	57
6.1.1	Canoe body	57
6.1.2	Appendages	57
6.2	Propeller	60
6.2.1	Shaft Installation	61
6.2.2	Strut drive	61
6.2.3	In aperture	62
6.2.4	Tractor propellers	62
6.2.5	Twin screws	62
6.3	Residuary Resistance	62
6.3.1	Canoe body	62
6.3.2	Appendages	64
6.4	Drag due to heel	65
6.5	Induced Drag	66
6.5.1	Correction Factors	67
6.6	Immersed transom	69
6.7	Rail-under drag	71
6.8	Added Resistance in Waves, $R_{AW}$	71
6.8.1	Wave Climate	71
6.8.2	Determination of added resistance response	72
6.9	Construction material length factor	75
<b>7</b>	<b>Environment</b>	<b>76</b>
7.1	Wind Triangle	76
7.2	Sailing Angles	76
7.2.1	Velocity Made along the Course. (VMC)	76

<b>8</b>	<b>Handicapping</b>	<b>78</b>
8.1	VPP results as used for scoring . . . . .	78
8.1.1	Velocity prediction . . . . .	78
8.1.2	Time allowances . . . . .	78
8.2	Simple scoring options . . . . .	79
8.2.1	Time on Distance (ToD) . . . . .	79
8.2.2	Time on Time (ToT) . . . . .	80
8.2.3	Triple Number . . . . .	80
8.2.4	Class Division Length (CDL) . . . . .	80
<b>A</b>	<b>Offsets File (.OFF) Format</b>	<b>82</b>
A.1	Introduction to offset format 2.0 . . . . .	82
A.2	Offset format - pre 2021 . . . . .	82
	<b>Bibliography</b>	<b>86</b>



## LIST OF FIGURES

3.1	Force Balance See saw . . . . .	11
3.2	Force Balance in the plane of the water surface . . . . .	12
3.3	Roll Moment Equilibrium . . . . .	13
3.4	Schematic of ORC VPP . . . . .	14
3.5	Functional relationships in the VPP Boat Model . . . . .	15
3.6	DA credit vs. True Wind Angle. . . . .	20
4.1	Offset file station distribution and typical section. . . . .	21
4.2	Flotation waterline positions. . . . .	23
4.3	Bulb and winglet detection scheme . . . . .	27
4.4	Upper Bulb shape factor examples . . . . .	28
4.5	Widest point detection . . . . .	29
4.6	Typical righting arm curve and hydrostatic data output . . . . .	30
4.7	Typical righting arm curve of a boat with movable ballast . . . . .	31
5.1	Sail parameters . . . . .	35
5.2	Basic Sail Force Coefficients . . . . .	36
5.3	De-powering scheme . . . . .	37
5.4	Routine for de-powering . . . . .	37
5.5	Roach calculation . . . . .	38
5.6	Alternative Mainsail force coefficients . . . . .	40
5.7	Fractionality Coefficient . . . . .	40
5.8	shadow effect of the mast portion above . . . . .	41
5.9	Alternative Jib Force Coefficient . . . . .	43
5.10	Spinnaker and Code zero Coefficients . . . . .	45
5.11	Large Spinnakers Force Correction in light winds . . . . .	46
5.12	Aero coefficients of flying headsail . . . . .	47
5.13	Typical From of “Collective” Upwind Sail Force Coefficients . . . . .	51
5.14	Variation of Effective Span Factor with Apparent wind angle . . . . .	53
5.15	Variation of Drag Coefficient with Flat parameter (left), modification of the linear depowering scheme, $f_{cdmults}$ (right) . . . . .	54
5.16	Twist Function . . . . .	54
6.1	Stripwise segmentation of appendages . . . . .	58
6.2	Increase of appendage drag with lift. . . . .	59
6.3	Propeller Installation Dimensions . . . . .	60
6.4	Typical $Rr$ multiplier at fixed Froude Number . . . . .	63
6.5	Flotation planes . . . . .	64
6.6	Appendage residuary resistance per unit volume at standard depth. . . . .	65
6.7	Induced Drag . . . . .	66
6.8	Multiplier of induced drag . . . . .	67
6.9	Scheme of bilgeboards and related variables . . . . .	68
6.10	Keel root free surface factor . . . . .	68
6.11	Principle of estimating transom immersion . . . . .	71
6.12	Wave Energy as a function of True Wind Velocity . . . . .	72
A.1	Offsets editing through ORC-Manager application . . . . .	82

## LIST OF TABLES

3.1	Matrix of values $pw$ used for the calculation of non manual power penalty. . . . .	20
5.1	Mainsail force coefficients . . . . .	39
5.2	Application of Alternative Coefficient sets for Mainsails . . . . .	40
5.3	Mainsail low tech material credit . . . . .	41
5.4	Genoa Force Coefficients . . . . .	42
5.5	Application of Alternative sets for jibs . . . . .	42
5.6	Symmetric Spinnaker Force Coefficients . . . . .	44
5.7	Asymmetric Spinnaker tacked on centreline Force Coefficients . . . . .	44
5.8	Asymmetric Spinnaker tacked on a pole Force Coefficients . . . . .	45
5.9	Aero coefficients of flying headsails. The names carry a number corresponding to the $HHW/HLP$ ratio. The two rightmost columns are the multipliers of $CL$ and $CD$ for battened sail . . . . .	48
5.10	Windage force model . . . . .	50
5.11	Calculated $PHI_{UP}$ values . . . . .	55
6.1	$L$ calculation scheme . . . . .	64
6.2	Added Resistance in Waves; parametric limits and base values . . . . .	73
6.3	Length factor for construction material . . . . .	75
7.1	VPP True wind angle and wind speed matrix . . . . .	77
8.1	Velocity prediction printed on the 1st page of the ORC International certificate . . . . .	78
8.2	Time Allowances and Selected Courses on the second page of the ORC International certificate . . . . .	79
8.3	Simple scoring options on ORC International & ORC Club certificate . . . . .	79
8.4	Time allowance weighing table . . . . .	80

## REVISION LIST

2022	
Section	Change
par. 5.2.3	modified spinnaker force coefficients
par. 6.1.2	modified viscous drag of appendages
par. 4.2.2	modified sailing trim calculation
par. 5.2.2	modified minimum jib area
par. 7.1	modified wind profile
par. 5.2.5	modified HSF coefficients
par. 5.2.2	model for jib with whisker pole

Beside the above changes, reflecting the modifications introduced in the VPP 2022, further fixes and additions were made to the document.



# 1 BACKGROUND

The following document describes the methods and formulations used by the Offshore Racing Congress (ORC) Velocity Prediction Program (VPP).

The ORC VPP is the program used to calculate racing yacht handicaps based on a mathematical model of the physical processes embodied in a sailing yacht. This approach to handicapping was first developed in 1978. The H. Irving Pratt Ocean Racing Handicapping project created a handicap system that used a mathematical model of hull and rig performance to predict sailing speeds and thereby produce a time on distance handicap system. This computational approach to yacht handicapping was of course only made possible by the advent of desktop computing capability.

The first 2 papers describing the project were presented to the Chesapeake Sailing Yacht Symposium (CSYS) in 1979 (Kerwin, J.E. and Newman, J.N. 1979, Strohmeier D.D. 1979) . This work resulted in the MHS system that was used in the United States. The aerodynamic model was subsequently revised by George Hazen (Hazen 1980) and the hydrodynamic model was refined over time as the Delft Systematic Yacht Hull Series was expanded (Gerritsma et al. 1993) .

Other research was documented in subsequent CSYS proceedings: sail formulations (2001 (Ranzenbach and Teeters 2001) and 2003 (Teeters J. et al. 2003)), and hull shape effects (2003 (Teeters J. et al. 2003)). Papers describing research have also been published in the HISWA symposia on sail research (Fossati et al. 2008).

In 1986 the current formulations of the IMS were documented by Charlie Poor (Poor 1986), and this was updated in 1999 (Claughton 1999). The 1999 CSYS paper was used as a basis for this document, with members of the ITC contributing the fruits of their labours over the last 10 years as the ORC carried forward the work of maintaining an up-to-date handicapping system that is based on the physics of a sailing yacht.

## 2 INTRODUCTION

### 2.1 SCOPE

The following document is a companion to the *ORC Rating Systems 2021* and *IMS (International Measurement System) 2021*. The document provides a summary of the physics and computational processes that lie behind the calculation of sailing speeds and corresponding time allowances (seconds/mile). The current ORC handicap system comprises 3 separate elements:

1. The IMS measurement procedure whereby the physical shape of the hull and appendages are defined, along with dimensions of mast, sails, etc.
2. A performance prediction procedure based on (1) a lines processing procedure which determines the parametric inputs used by the Velocity Prediction Program (VPP) to predict sailing speed on different points of sailing, in different wind speeds with different sails set.
3. A race management system whereby the results of (2) are applied to offer condition-specific race handicapping.

This document describes the methodology of the equations used to calculate the forces produced by the hull, appendages, and sails, and how these are combined in the VPP.

### 2.2 OVERVIEW

Predicting the speed of a sailing yacht from its physical dimensions alone is a complex task, particularly when constrained by the need to do it in the “general case” using software that is robust enough to be run routinely by rating offices throughout the world. Nevertheless this is what the ORC Rating system aims to do. The only absolute record of the VPP (and companion Lines Processing Program (LPP)) is the FORTRAN source code, so it is a difficult matter for a layman to determine either the intent or underlying methodology by inspection of this code.

The purpose of this document is to describe the physical basis of the methods used to predict the forces on a sailing yacht rig and hull, and to define the formulations (equations) used by the VPP to encapsulate the physical model.

In order to do this the document has been set out to first layout the broadest view of the process, gradually breaking the problem down into its constituent parts, so that ultimately the underlying equations of the VPP can be presented.

### 2.3 LAYOUT

The document is arranged in 6 chapters:

- Chapter 3 describes the methods by which the velocity prediction is carried out and the fundamental force balances inherent in solving the problem are laid out. Following this an overview of the “boat model” is presented, whereby the elements of the aerodynamic and hydrodynamic model are described.
- Chapter 4 describes how the hull shape parameters are pre-processed to determine the parameters that are used in the hydrodynamic force model described in Section 8.
- Chapter 5 describes how the yacht’s environment is characterized in terms of the incident wind field experienced by the sails.
- Chapter 6 describes how the VPP results are presented as a rating certificate.
- Chapter 7 describes the methods used to predict the aerodynamic forces produced by the mast, sails, and above-water part of the hull.
- Chapter 8 describes how the hydrodynamic drag and lift of the hull and appendages are calculated.

### 3 VPP METHODOLOGY

The VPP has a two-part structure comprised of the solution algorithm and the boat model. The solution algorithm must find an equilibrium condition for each point of sailing where:

- a) the driving force from the sails matches the hull and aerodynamic drag, and
- b) the heeling moment from the rig is matched by the righting moment from the hull.

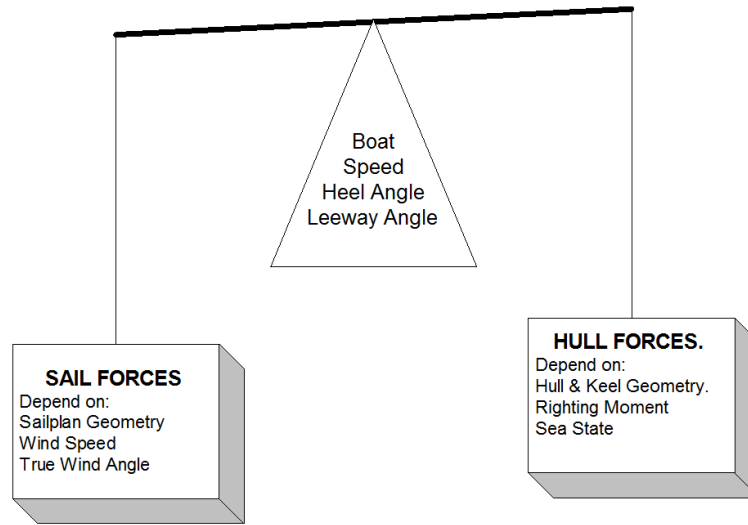


FIGURE 3.1: *Force Balance Seesaw*

i.e. balance the seesaw in Figure 3.1(?), and optimize the sail controls (reef and flat) and the crew transverse position to produce the maximum speed at each true wind angle.

#### 3.1 SOLUTION METHOD

The VPP determines the steady state conditions by satisfying 2 equilibrium equations:

1. Firstly the net force - along the yacht's track (its direction of motion) must be zero,

$$(i.e. \text{ Driving Force} - \text{ Drag} = 0)$$

2. Secondly the aerodynamic heeling moment produced by the mast & sails must be equal and opposite to the righting moment produced by the hull and crew.

$$(i.e. \text{ Heeling Moment} - \text{ Righting Moment} = 0)$$

Figure 3.2 shows a yacht sailing on starboard tack. In order for the yacht to hold a steady course the magnitude and line of action of the aerodynamic and hydrodynamic forces must be the same. The VPP adopts an iterative procedure at each true wind speed and angle to find "equilibrium" sailing conditions, defined by unique values of boat speed ( $V_s$ ), heel angle ( $\phi$ ), and the sail trim parameters (reef, flat) where;

1. Thrust (driving force) from the sails equals the hydrodynamic drag.
2. The heeling moment produced by the couple between the aerodynamic and hydrodynamic Heeling Force equals the hull righting moment, as shown in Figure3.3



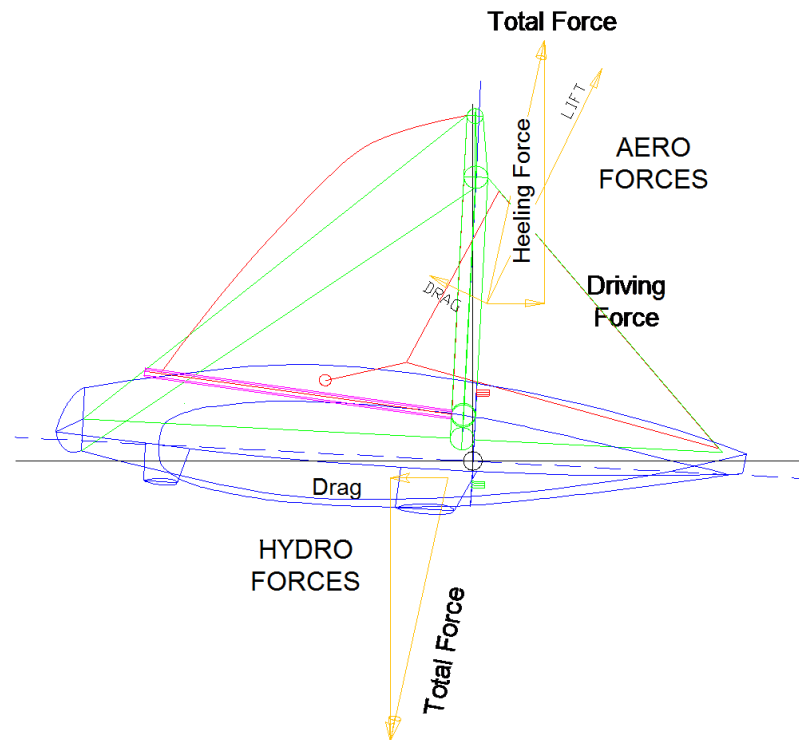


FIGURE 3.2: *Force Balance in the plane of the water surface*

It should be noted that the VPP solves only for a balance of force and moment about the track axis. The yaw moment balance is ignored so that sail trimming options, or speed and heel values that produce excessive yaw moments, are not reflected in terms of their influence on speed.

## 3.2 BOAT MODEL

The boat model may be thought of as a black box into which boat speed, heel angle, and the sail trim parameters, reef and flat are input. The output is simply four numbers:

- the aerodynamic driving force,
- the heeling moment from the above water part of the hull and rig,
- the drag of the hull keel and rudder and,
- the righting moment from the hull and crew.

The solution algorithm iterates to a solution by interrogating the boat model with each new guess of the input values until a set of conditions is found that produces a match of thrust and drag and heeling moment and righting moment. The solution algorithm also seeks to find the highest speed on each point of sailing by adjusting the sail trim parameters and the crew righting moment for optimum performance. Figure 3.4 shows how the boat model is divided into two parts:

- **Aerodynamic Force Model**

For a given wind and boat model variable set (true wind speed  $V_T$ , true wind angle  $\beta_T$ ,  $V_s$ ,  $\phi$ , reef, flat), determine the apparent wind angle and speed that the sails ‘see’ and predict the aerodynamic lift and drag they produce. The aerodynamic forces are resolved into a thrust and heeling force.

- **Hydrodynamic Force Model**

Predicts the resistance (drag) and righting moment the hull produces for the assumed speed and heel angle, given that the hydrodynamic side force will equal the previously calculated aerodynamic heeling force.

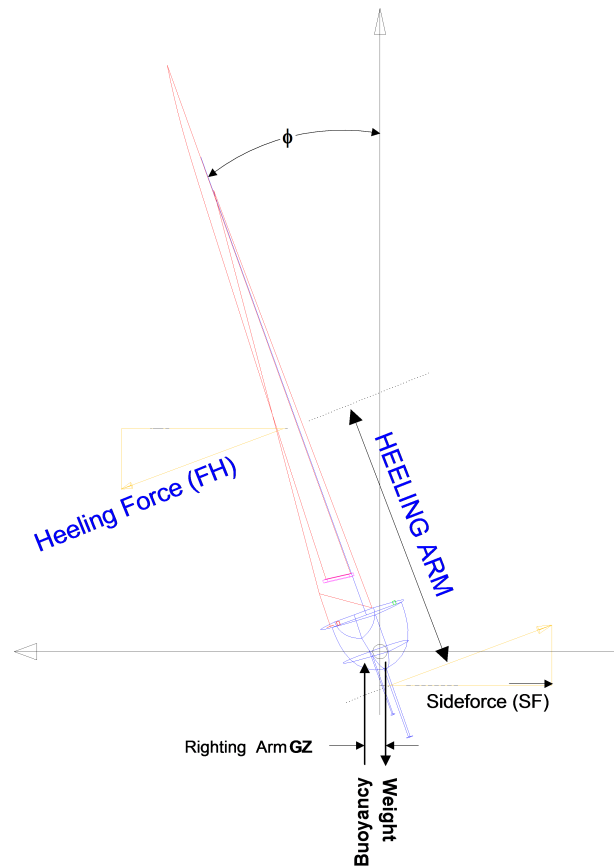


FIGURE 3.3: *Roll Moment Equilibrium*

### 3.2.1 FUNCTIONAL RELATIONSHIPS

Figure 3.5 shows the functional relationships that make up the elements of the VPP boat model. In order to minimize amount of computational operations within the main iterative VPP loop the Rig Analysis and the Lines Processing parts are carried out before the computations of a steady state solution begin.

#### RIG ANALYSIS PROGRAM

The Rig Analysis Program takes the measured sail and rig dimensions and calculates the areas and centers of effort for the mainsail, jib and spinnaker. Originally the Rig Analysis Program used the force coefficients for each individual sail to calculate a “collective” set of aerodynamic force coefficients for the rig in an upwind and downwind configuration. This collective table of lift and drag coefficients at each apparent wind angle is interrogated by the solution algorithm during each iteration as the program works towards an equilibrium sailing condition.

More recently<sup>1</sup> for the upwind sailing configurations the calculation of the “collective” sail force coefficients was moved inside the VPP optimization loop so that a more realistic model of sail heeling force reduction could be used.

#### LINES PROCESSING PROGRAM (LPP)

The Lines Processing program takes the measured hull shape, expressed as an offset file<sup>2</sup>, and calculates the hull dimensions and coefficients that are used to calculate hull drag. The LPP also takes the inclining test results and uses this to determine the yachts stability in sailing trim.

<sup>1</sup>2009

<sup>2</sup>.OFF File, a simple txt file of transverse (y) and vertical (z) coordinates of the hull surface at a fixed longitudinal (x) position

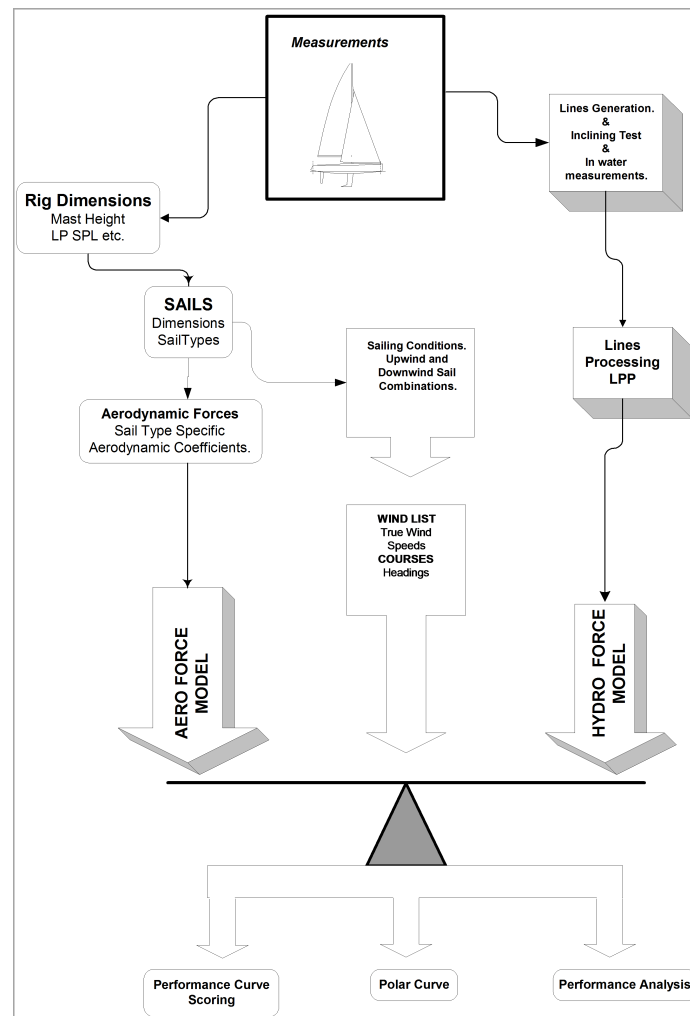


FIGURE 3.4: Schematic of ORC VPP

### ITERATIVE SOLVER LOOP

Once these elements have been completed the iterative part of the VPP is started. At each wind speed and true wind angle the process starts with an initial guess at speed and heel angle, given this the wind triangle can calculate the apparent wind speed and angle for the aerodynamic model.

With this information the total aerodynamic force can be calculated, based on the “collective” aerodynamic coefficients. The total aerodynamic force is resolved into the thrust and heeling force (See Figure3.2).

Using the same initial guess for speed and heel angle, plus the calculated heeling force from the aerodynamic force model, the hydrodynamic model can calculate the total hull drag.

The available thrust and the drag can now be compared and a revised estimate of speed can be made, so the heeling moment and righting moment are compared to provide a revised value for heel angle. This process is repeated until speed and heel angle have converged to a steady value. The process is then repeated for a matrix of true wind angles and wind speeds.

The solution routine also includes an optimization element that ensures the sail trim parameters (reef and flat) are chosen to produce the highest speed on each point of sailing. The same routine is used to ensure that the VPP calculates an optimum up-wind and down-wind VMG for each true wind speed. In 2019 the crew righting moment has been included as an additional optimization parameter: the crew weight is moved between the full-to-leeward and the full-to-windward positions, seeking again for the highest boat velocity.



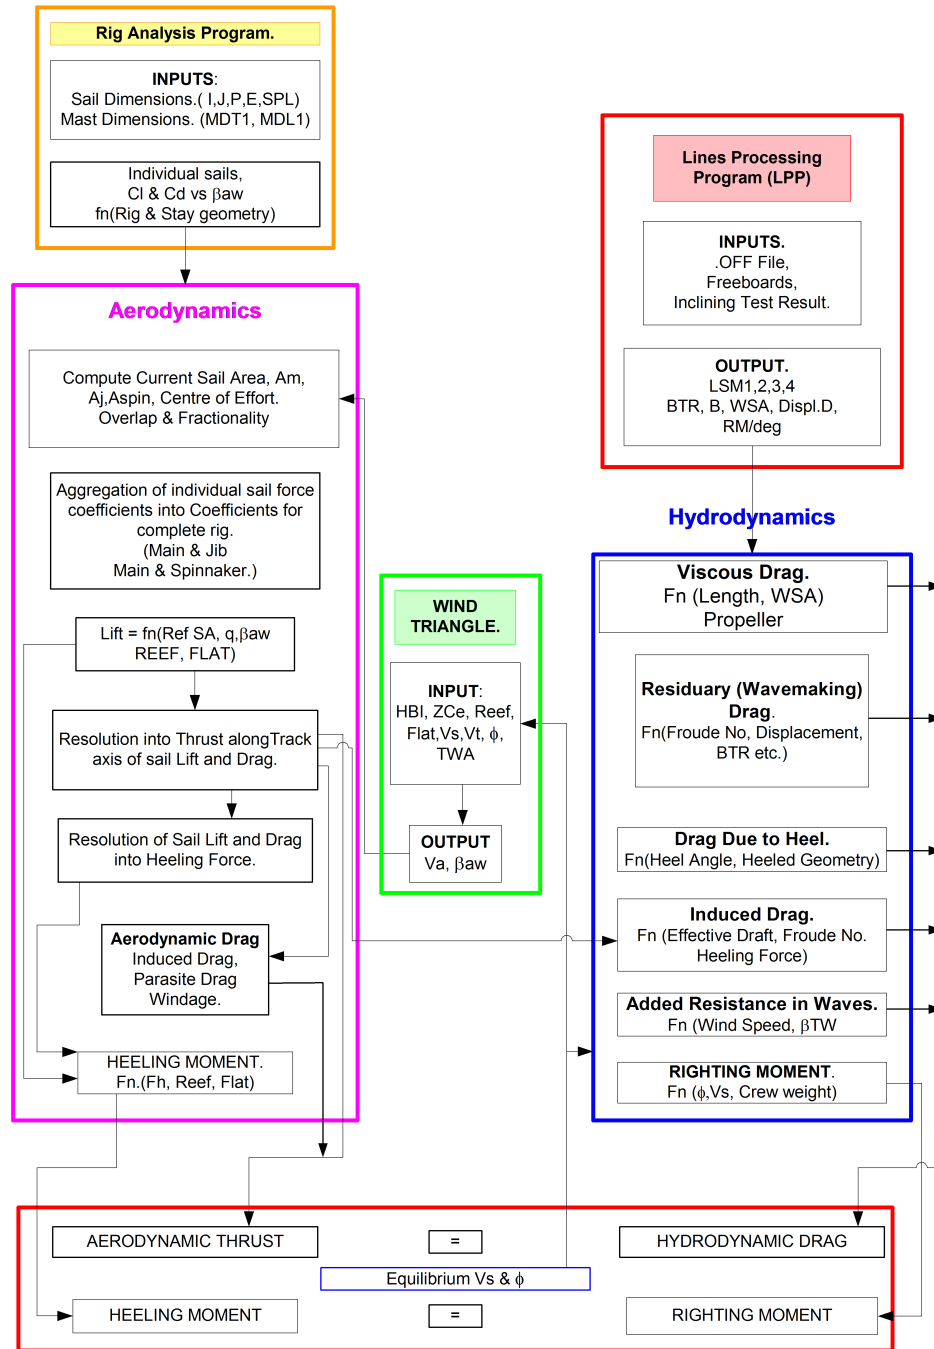


FIGURE 3.5: Functional relationships in the VPP Boat Model

### 3.3 EQUATIONS OF EQUILIBRIUM

In order to produce a steady state sailing condition the VPP must solve the 2 equilibrium equations matching available driving force to drag, and the heeling moment to the hull righting moment. The accuracy of the VPP prediction is entirely reliant on the accuracy with which these 4 elements can be calculated from parametric data gathered during the measurement process.

#### 3.3.1 DRIVING FORCE - DRAG

This is the basic equation for longitudinal force equilibrium, with the net force along the boat's track being zero:

$$FRA - FRW = 0 \quad (3.1)$$

where:

$$\begin{aligned} FRA &= \text{Total Aerodynamic Thrust} \\ FRW &= \text{Total Resistance} \end{aligned}$$

The total resistance is treated as the sum of 4 separate components, shown in equation 3.2. In reality these divisions are not physically clear-cut, but the approach is adopted to make the problem tractable using a parametric description of the hull and its appendages.

$$FRW = D_{viscous} + D_{residuary} + D_{induced} + D_{raw} \quad (3.2)$$

where:

$$\begin{aligned} D_{viscous} &= \text{Drag due to the friction of the water flowing over the surface of the hull and appendages at the current heel angle, and the propeller if one is fitted.} \\ D_{residuary} &= \text{Residuary Drag, drag due to the creation of surface waves, calculated from the hull parameters at the current heel angle.} \\ D_{induced} &= \text{Induced Drag created when the hull keel and rudder produce sideforce} \\ D_{raw} &= \text{Drag due to the yachts motion in a seaway.} \end{aligned}$$

The aerodynamic driving force is the Aerodynamic driving force less the windage drag of the above-water boat components.

$$FRA = FRA_{b4windage} - FRA_{hull} - FRA_{mast} - FRA_{rigging} - FRA_{crew} \quad (3.3)$$

where:

$$\begin{aligned} FRA_{b4windage} &= \text{Aerodynamic driving force} \\ FRA_{hull} &= \text{Hull windage drag} \\ FRA_{mast} &= \text{Mast windage drag} \\ FRA_{rigging} &= \text{Rigging wire drag} \\ FRA_{crew} &= \text{crew windage drag} \end{aligned}$$

### 3.3.2 HEELING MOMENT - ROLLING MOMENT

The aerodynamic heeling moment produced by the mast and sails must be equal and opposite to the righting moment produced by the hull and crew.

$$HM_{total} = RM_{total} \quad (3.4)$$

$$HM_{total} = HMA + RM4 \cdot FHA \quad (3.5)$$

$$HMA = HMA_{b4windage} + HMA_{hull} + HMA_{mast} + HMA_{rigging\_wire} + HMA_{crew} \quad (3.6)$$

where

$$\begin{aligned} HMA_{total} &= \text{Total heeling moment} \\ RM_{total} &= \text{Total righting moment} \\ HMA &= \text{Aerodynamic heeling moment about the waterplane} \\ RM4 &= \text{Vertical CLR, below waterplane} \\ FHA &= \text{Total aerodynamic heeling force (equal to hydrodynamic force normal to the yachts centre plane)} \\ HMA_{b4windage} &= \text{Aerodynamic heeling moment from sails} \\ HMA_{hull} &= \text{Hull windage heeling moment} \\ HMA_{mast} &= \text{Mast windage heeling moment} \\ HMA_{rigging\_wire} &= \text{Rigging wire windage heeling moment} \\ HMA_{crew} &= \text{Crew windage heeling moment} \end{aligned}$$

$FHA$  is the total heeling force:

$$FHA = FHA_{b4windage} + FHA_{hull} + FHA_{mast} + FHA_{crew} \quad (3.7)$$

where

$FHA_{b4windage}$	=	Aerodynamic heeling force from sails
$FHA_{hull}$	=	Hull windage heeling force
$FHA_{mast}$	=	Mast windage heeling force
$FHA_{rigging\_wire}$	=	Rigging wire windage heeling force
$FHA_{crew}$	=	Crew windage heeling force

$RM_{total}$  is the total righting moment available from the hull and crew sitting off centerline.

$$RM_{total} = RM_{\phi} - RMV + RM_{aug} \quad (3.8)$$

where

$RM_{\phi}$	=	Hydrostatic Righting moment
$RMV$	=	Stability loss due to forward speed
$RMV_{aug}$	=	Righting moment augmentation due to shifting crew

### 3.4 WATER BALLAST AND CANTING KEEL YACHTS

The following section describes the VPP run sequences for yachts with moveable ballast and retractable dagger boards or bilgeboards.

#### 3.4.1 CANTING KEEL

Two VPP runs are made and the best speed achieved on each point of sailing is used to calculate the handicap.

- First VPP run with canting keel on Centre Line (CL) without adding any Righting Moment increase (MHSD computed with the keel on CL)
- Second VPP run with canting keel fully canted adding Righting Moment increase (MHSD computed from the maximum of the two rudders and canted keel.)

#### 3.4.2 DAGGERBOARD (CENTRELINE LIFTING APPENDAGE)

The daggerboard is input to the .DAT file with a special code to identify it as such. Two VPP runs are made and the best speed achieved on each point of sailing is used to calculate the handicap.

- First VPP with the dagger board up. If the yacht has a canting keel this VPP run is done with the keel on centre line.
- Second VPP run with the dagger board down, viscous drag calculated as if it were a conventional fin keel. If the yacht has a canting keel this run is done with the keel at full cant angle. (MHSD is computed with maximum depth based on the keel canted, dagger board down and aft rudder)

#### 3.4.3 DAGGERBOARD AND BILGE BOARDS

Daggerboard and bilgeboards are lifting appendages, the former on the centerline and the latter off centerline. They are added to the .DXT file, by specifying the span, the thickness, the average chord, and also the angle to the vertical, the lateral and longitudinal position. Moreover, it is specified if the board is retractable and to what extent (bilgeboard fraction). When the lateral position is set to zero, this defines a single daggerboard, otherwise two bilgeboards are modelled. Two VPP runs are made and the best speed achieved on each point of sailing is used to calculate the handicap.

- First VPP run with the bilge board up. If the yacht has a canting keel this VPP run is done with the keel on centre line.
- Second VPP run with the leeward bilge board (or daggerboard) down, viscous drag calculated as if it were a conventional fin keel. If the yacht has a canting keel this run is done with the keel at full cant angle. (MHSD computed with maximum depth between keel canted, fwd leeward bilge board down and aft rudder)

### 3.4.4 WATER BALLAST

Two VPP runs are executed, with and without water ballast; the fastest speed is used for handicapping. When water ballast volume is input directly, the following values are assumed:

$$\begin{aligned}\text{Water ballast VCG} &= 0.50 \times \text{freeboard\_aft} \\ \text{Water ballast LCG} &= 0.70 \times \text{LOA} \\ \text{Water ballast Moment arm} &= 0.90 \times \text{crew\_arm}\end{aligned}$$

When there are water ballast tanks (one tank on each side) and canting keel, the following runs are performed:

1. tanks empty, keel on CL
2. tanks empty, keel to windward
3. tank to windward filled, keel on CL
4. tank to windward filled, keel to windward

The fastest solution among the above four is taken as the final solution.

In 2016 a new type of water ballast have been introduced in addition to the above one: in this case the ballast is supposed to be shifted to windward when going upwind, but the tanks are not emptied when going downwind. They are called *fresh water ballast*.

### 3.4.5 MEASUREMENT

Dimensions and locations of dagger boards, bilge boards, forward rudders, etc. can now be added to the .DXT files rather than by direct measurement of their offsets with the wand or laser scanner. For water ballast yachts the volume and location of the water ballast may be edited into the .DXT file instead of by direct measurement.

## 3.5 DYNAMIC ALLOWANCE (DA)

Dynamic Allowance is an adjustment which may be applied to velocity predictions (i.e., time allowances) to account for relative performance degradation in unsteady states (e.g., while tacking) not otherwise accounted for in the VPP performance prediction model. DA is a percentage credit calculated on the basis of six design variables deemed to be relevant in assessing the performance degradation and is applied (or not applied) as explained below.

Even where applied, the result of the calculated credit may be zero. The design variables considered are described in section 3.5.1 below. Where applied, the calculated amount of credit will vary with point of sail and wind velocity.

These credits are therefore applied individually to each respective time allowance cell in the large table on the Rating Certificate (see Table 8.2) entitled, “Time Allowances”. The credit is also automatically carried forward into the “Selected Courses” time allowances table, because these course time allowances are comprised of the appropriate proportions of various time allowances from the larger table. Likewise, any credit is carried forward into the General Purpose Handicap (GPH) and the “Simplified Scoring Options”. The single value for DA which is actually displayed on the Certificate is that which was applied to GPH and is shown only to give a comparative reference to the average DA applied for the yacht.

For yachts in the Cruiser/Racer Division that comply with IMS Appendix 1, the DA percentage credits are always fully applied to the time allowances. For other yachts the DA is applied with the same credit only of boats older than 30 years<sup>3</sup>.

The various credits are derived from a statistical study of a fleet of Cruiser/Racers and Racers, based on IMS L to take into account a scaling factor. For each parametric ratio, an area in the Cartesian plane (Ratio/L) is fixed, limited by two boundary lines which represent a statistical approximation of the Cruiser/Racers and the Racers respectively. For a given “L”, a difference is calculated as the distance between the boundary limits. The individual contribution of each parameter for the given yacht will be the ratio of the distance between the individual yacht’s parameters relative to the Racer boundary line and the previously computed distance between the boundaries, with a cap value for each of the parameters.

---

<sup>3</sup>2020

### 3.5.1 CREDITS (2012)

The credits are then calculated as follows:

$$Credit = MaxCredit \cdot \frac{racer\_slope \cdot L + racer\_incpt - RATIO}{(racer\_slope - cruiser\_slope) \cdot L + (racer\_incpt - cruiser\_incpt)} \quad (3.9)$$

where

<i>RATIO</i>	<i>racer_slope</i>	<i>racer_incpt</i>	<i>cruiser_slope</i>	<i>cruiser_incpt</i>	<i>MAX CREDIT</i>
btgsa/vol	0.620	19.0	0.392	15.238	0.75%
runsa/vol	1.000	32.0	0.727	25.093	0.30%
btgsa/ws	0.058	2.39	0.0294	2.38	0.75%
runsa/ws	0.089	4.10	0.059	3.924	0.30%
L/vol	0.062	4.45	0.055	3.985	0.30%

#### BEATING CREDIT

Applied full strength to VMG Upwind, then linearly decreased to zero at 70° True Wind Angle (TWA), varied with True Wind Speed (TWS) as follows:

$$Beating\_Credit = \frac{btgsa \cdot (20 - TWS)}{Wetted\_area\_credit \cdot (20 - 6)} + \frac{BSA \cdot TWS}{Volume\_Credit \cdot 20} \quad (3.10)$$

btgsa/Wetted Area Credit is calculated with complete Sail Area (mainsail + genoa), BSA/ Volume Credit is calculated with Sail Area = Mainsail + foretriangle

#### RUNNING CREDIT

Applied full strength VMG Downwind, then linearly decreased to zero at 90° TWA, varied with TWS as follows:

$$Running\_Credit = \frac{runsa \cdot (20 - TWS)}{Wetted\_area\_credit \cdot (20 - 6)} \cdot \frac{DSA \cdot TWS}{Volume\_Credit \cdot 20} \quad (3.11)$$

#### LENGTH/VOLUME RATIO

Applied full strength to all TWA and TWS

### 3.5.2 CALCULATION PROCEDURE

1. Compute the table of polar speeds and GPH without any credit (like all racing boats)
2. Compute DA credits for each true wind speed and wind angle to obtain a matrix with the same row and columns as the table of speeds.
3. Divide any polar speed of the table by corresponding computed credit and re-calculate the new GPH. To compute the DA value (that is printed on certificate only as reference) the ratio between new and the original GPH is used.

The typical distribution of DA over True wind speed and angle is shown in Figure 3.6

## 3.6 NON MANUAL POWER

Similarly to the Dynamic Allowance, there is another corrector to the overall performance of the boat, which is applied after the solution is calculated in terms of velocities and heeling. The corrector is based on the use of non manual power for adjusting the rig, sail sheets, or both (plus any other manoeuvre). Below is displayed the amount of handicap penalty, in percentage, for each of the above three types of non-manual power. The penalty is different for boats belonging to the Race category compared to those belonging to the Cruiser/Racer one. Moreover, the amount of the penalty (in %) is adjusted by the square of the ratio of declared crewweight to the default crewweight:

$$f_{nmp} = 0.5 \cdot pw \cdot \left( \min\left(\frac{creweight}{creweight_{def}}; 1\right) \right)^2 \quad (3.12)$$

This is done with the aim of distinguish between boats having full crew plus the aid of non manual power and boats using it essentially because they are short of crew.

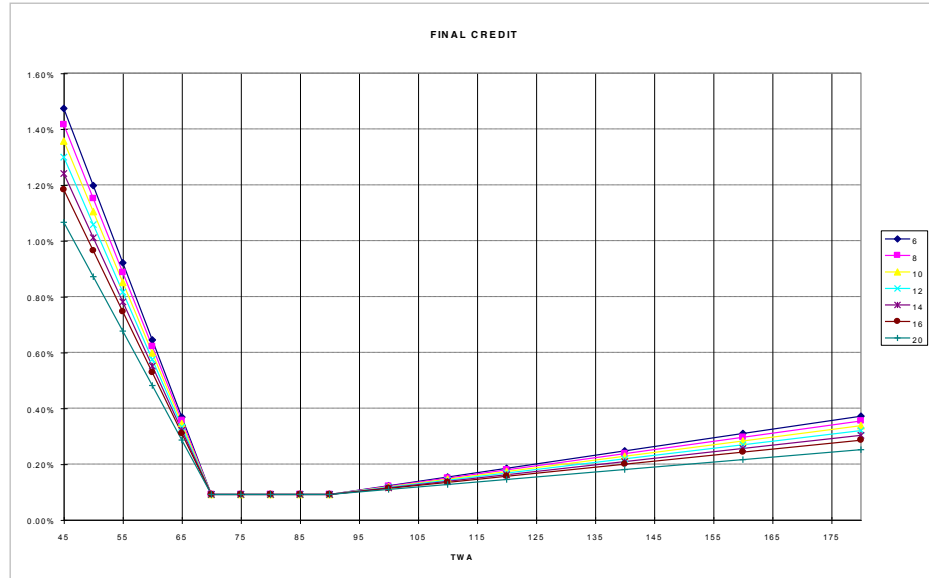


FIGURE 3.6: *DA credit vs. True Wind Angle.*

	rig	sheets	all
Performance	0.50	0.50	1.00
Cruiser/Racer	0.25	0.75	1.00

TABLE 3.1: *Matrix of values  $pw$  used for the calculation of non manual power penalty.*

## 4 LINES PROCESSING PROGRAM

The LPP is a companion program to the VPP which processes the measurements taken from the hull and appendages into an Offset (.OFF) file and uses this point by point geometric definition to calculate integrated physical quantities that the boat model can use to perform its calculations.

The LPP uses the hull shape defined by the offset file and the results of the inclining test to determine the righting moment at each heel angle.

The LPP uses a definition of hull and appendage shape derived from physical measurement of the hull. The measurement of the hull (wandering) is carried out at pre-determined transverse stations according to the measurement instructions. A typical offset file is shown in Figure 4.1. The format of the .OFF file is described in Appendix A.

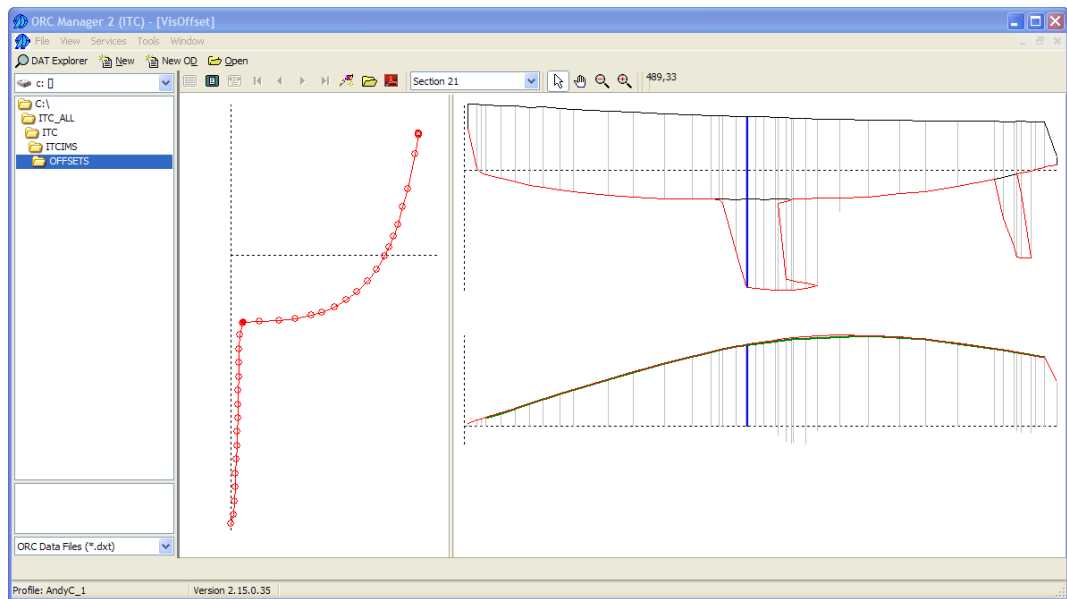


FIGURE 4.1: Offset file station distribution and typical section.

### 4.1 HYDROSTATICS

As part of the afloat measurements an inclining test is carried out and the freeboards in “Light Ship Trim”<sup>1</sup> are determined. The first task of the LPP is calculate a righting moment vs. heel angle curve for the yacht in its sailing condition. The following steps are carried out:

- Determine measurement trim displacement from the immersed volume of hull and appendages below the flotation waterline, using the offset file as a definition of the immersed hull and appendages
- Use the inclining test results to determine the vertical centre of gravity position (VCG) in measurement trim
- Calculate the displacement and VCG in sailing trim by the addition of weights for crew and gear
- Calculate a righting moment at specified heel angles
- Calculate the Limit of Positive Stability (LPS), the heel angle above which the yacht will capsize

<sup>1</sup>2013

## 4.2 LPP OUTPUT PARAMETER DEFINITIONS

In addition to the traditional “hydrostatic” calculations the LPP also calculates a number of parameters that are used by the hydrodynamic force model. Two fundamental flotation conditions are determined:

### 4.2.1 MEASUREMENT TRIM

The flotation waterplane is that determined by the measured freeboards with the yacht floating upright.  $LSM0$  is calculated in this condition using equation [4.11], and an exponent  $nl = 0.25$

### 4.2.2 SAILING TRIM

In order to achieve the sailing trim and center of gravity, the default crew weight and gear weight and the sail weighs are combined and added together. The heights (in meters) are referred to the measurement trim flotation plane.

#### CREW WEIGHT

The default value for the Crew Weight (kg.) is calculated as follows:

$$CW = 25.8 \cdot LSM0^{1.4262} \quad (4.1)$$

The above value cannot be larger than 50% of the displacement in light ship trim. The owner may accept the default calculated weight, but can declare any crew weight which shall be recorded in the certificate. The declared crew weight is used to compute increased righting moment while default crew weight will be used to compute sailing trim displacement.

The longitudinal and vertical position of the combined crew longitudinal centre of gravity are:

$$crew_l = 0.1 \cdot LSM0 + LCB \quad (4.2)$$

$$crew_v = 0.05 \cdot LSM0 + 0.36 \quad (4.3)$$

$$(4.4)$$

#### GEAR WEIGHT

Gear weight is calculated from equation below:

$$Gear\_Weight = 0.16 \cdot Crew\_Weight\_Default \quad (4.5)$$

In 2020 the gear weight has been bounded to be less than 5% of the displacement in measurement trim.

#### SAILS WEIGHT

In 2020 the sails weight has been reformulated taking indirectly into account the pressure acting on the sails, by introducing the righting moment in the formulation. Below,  $A_{main}$ ,  $A_{jib}$  and  $A_{spin}$  are the areas of the largest main, jib and spin found in the sail inventory,  $DHK$  is the keel draft.

$$\begin{aligned} arm &= P + BAS + HBI + DHK \\ SA &= A_{main} + A_{jib} + A_{miz} \\ k1 &= \frac{RM25}{0.43 \cdot arm \cdot SA} \\ mw &= (k1 \cdot 0.00065 \cdot A_{main}^2 + 0.12 \cdot A_{main}) + 1.5 \\ jibw &= (k1 \cdot 0.00091 \cdot A_{jib}^2 + 0.12 \cdot A_{jib}) + 1.5 \\ spinw &= \max(k1 \cdot \frac{0.0013}{30} \cdot A_{spin}^2, 0.08 \cdot A_{spin}) \\ hsfw &= \max(k1 \cdot \frac{0.0013}{30} \cdot A_{tothsf}^2, 0.08 \cdot A_{tothsf}) \\ rnjibs &= 3.16 + 0.2345 \cdot LSM0 \\ rnjibs &= rnjibs - nhsf \\ rnspsins &= 1.16 + 0.2345 \cdot LSM0 \\ osailsw &= jibw \cdot \max(rnjibs \cdot 0.5, 1) + spiw \cdot \max(rnspsins \cdot 0.6, 1) + hsfw \end{aligned} \quad (4.6)$$



In the above formulas,  $A_{tothsf}$  is the cumulative total area of the declared headsails set flying, and  $nhsf$  is the declared number of headsails set flying. The terms  $rnjibs$  and  $rnspins$  are continuous functions fitting at best the ORC rules for maximum number of sails on board.  $rnjibs$  is bounded by 5 at the bottom and 8 at the top, similarly  $rnspins$  is bounded by 3 and 6. They depend by  $LSM0$  because the  $CDL$ , which is used the ORC rules, is not known until the end of the VPP run. The headsail set flying weight calculation takes into account the real number of sails declared on board, which also acts as a constraint when computing the number of jibs on board. The weighs then added for computing the sailing trim are  $mw$  (mainsail weight) and  $osailsw$  (other sails weight), this last summing up the weighs of luffed headsails (jibs), headsails set flying, and spinnakers.

The longitudinal position of mainsail weight and of other sails are respectively:

$$mswl = 0.03 \cdot LSM0 + LCB \quad (4.7)$$

$$oswl = -0.095 \cdot LSM0 + LCB \quad (4.8)$$

while the vertical positions are:

$$mswv = 0.33 \cdot P + BAS + HBI \quad (4.9)$$

$$oswv = 0.012 \cdot LSM0 - 0.32 \quad (4.10)$$

### 4.2.3 SECOND MOMENT LENGTH (LSM)

$$LSM = 3.9232 \cdot \sqrt{\left(\frac{\int x^2 s dx^{nl}}{\int s dx^{nl}}\right) - \left(\frac{\int x s dx^{nl}}{\int s dx^{nl}}\right)^2} \quad (4.11)$$

where:

- $s$  = an element of sectional area attenuated for depth
- $x$  = length in the fore and aft direction
- $nl$  = Length Exponent

This method of deriving the Effective sailing length from a weighted sectional area curve is a legacy of the original MHS system. Originally the length calculation took note of the longitudinal volume distribution of the hull, rather than include directly in the residuary resistance calculation terms that were calculated from the sectional area curve.

The depth attenuation of sectional areas is performed by multiplying each  $Z$  (vertical offset) by  $e^{(-10 \cdot Z / LSM0)}$ .

The LPP uses the physical shape of the canoe body, as defined by the .OFF offset file, to calculate immersed lengths at several different waterplane positions.

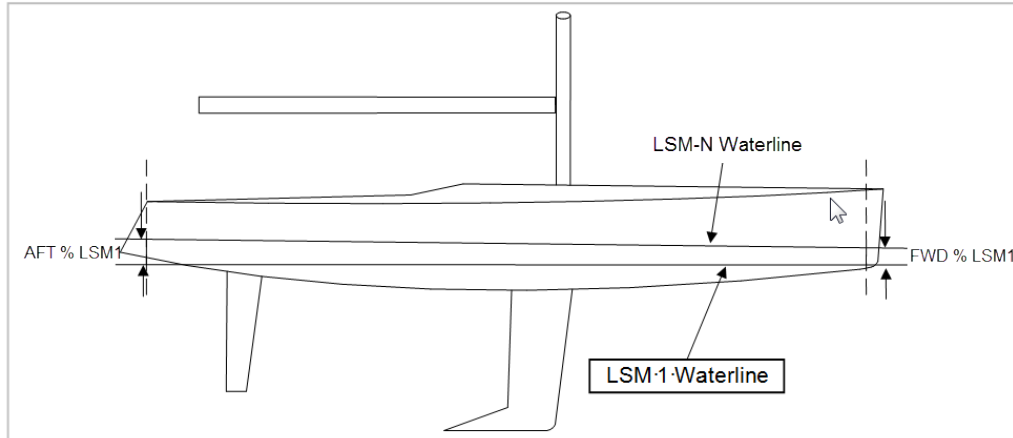


FIGURE 4.2: Flotation waterline positions.

#### 4.2.4 APPENDAGE STRIPPING

Once the offset file has been acquired and checked, the LPP “strips” off the appendages to leave a “fair” canoe body. Various hydrostatic characteristics and physical parameters are calculated using the flotation waterline determined at the in-water measurement. The characteristics of the appendages are handled separately to determine the parameters that affect their resistance.

#### 4.2.5 BEAM DEPTH RATIO (BTR)

The LPP also computes the effective beam and draft of the yacht's canoe body, along with the maximum effective draft of the keel. The Beam Depth Ratio (BTR) is the effective beam (B) divided by the effective hull depth (T).

$$BTR = \frac{B}{T} \quad (4.12)$$

##### THE EFFECTIVE BEAM (B)

The effective beam is calculated based on the transverse second moment of the immersed volume attenuated with depth for the yacht in Sailing Trim floating upright. This approach “weights” more heavily elements of hull volume close to the water surface.

$$B = 3.45 \cdot \sqrt{\frac{\frac{2}{3} \cdot \int \int (b^3 e^{-10z/LSM0}) dz dx}{\int \int (b e^{-10z/LSM0}) dz dx}} \quad (4.13)$$

where

- $b$  = an element of beam;
- $e$  = is the Neperian base, 2.7183
- $z$  = is depth in the vertical direction
- $x$  = is depth in the fore and aft direction

##### EFFECTIVE HULL DEPTH (T)

The Effective Hull Depth is a depth-related quantity for the largest immersed section of the hull. It is derived from the area of the largest immersed section attenuated with depth for the yacht in Sailing Trim floating upright (AMS2) divided by B:

$$T = 2.07 \cdot \frac{AMS2}{B} \quad (4.14)$$

##### MAXIMUM SECTION AREAS

Maximum section areas used for the derivation of Effective Hull Depth (T).

AMS1 is the area of the largest immersed section for the yacht in Sailing Trim floating upright. AMS2 is the area of the largest immersed section attenuated with depth for the yacht in Sailing Trim floating upright.

Formulae for Maximum Section Areas, (where  $b$  is an element of beam;  $e$  is the Naperian base, 2.7183; and  $z$  is depth in the vertical direction):

$$\begin{aligned} AMS1 &= \text{maximum of } \int b dz \text{ over length} \\ AMS2 &= \text{maximum of } \int b \cdot e^{-10z/LSM0} dz \text{ over length} \end{aligned}$$

#### 4.2.6 MAXIMUM EFFECTIVE DRAFT (MHSD)

To inform the calculation of hydrodynamic induced drag (drag due to lift<sup>2</sup>) during the VPP force balance calculations the “effective draft” of the hull and keel combination must be calculated.

The value of the effective draft (MHSD) is determined by the LPP using the original expression for a “reduced draft” (TR) which is calculated based on the local section maximum draft and hull cross sectional area. This expression which treats the hull and keel as one half of a slender axi-symmetric body, calculates the effect of streamline contraction around the canoe body. In this way the influence of a deep hull on effective draft is accounted for.

The maximum effective draft of the keel is found by calculating the following parameters at each immersed station along the length of the hull.

---

<sup>2</sup>described in section 6.5

$TRMAX$	=	$xy1$ = Maximum reduced draft
$TRD$	=	$xy$ = Centreline immersed depth
$TRSA$	=	sectional area.
$TRX$	=	longitudinal location of station
$S(i)$	=	the sectional area at station $i$
$Xxy$	=	centerline immersed depth of station ( $i$ )

$$xxb = \sqrt{\frac{4 \cdot S(i)}{\pi \cdot BTR}} \quad (4.15)$$

$$xxr1 = 0.5 \cdot \left( \frac{xy}{xxb} + \sqrt{\left( \frac{xy}{xxb} \right)^2 + 0.25 \cdot BTR^2 - 1} \right) \quad (4.16)$$

$$xxr2 = \sqrt{xxr1^2 - 0.5 \cdot (1 + 0.5 \cdot BTR)} \quad (4.17)$$

$$xy = xxb \cdot \left( xxr2 - \frac{0.25 \cdot (0.25 \cdot BTR^2 - 1)}{xxr2} \right) \quad (4.18)$$

These computed quantities are only important as intermediate results. The information is stored for the station yielding the greatest value of  $xy1$ , “MHSD” (MHS draft), and is determined from:

$$MHSD = 0.92 \cdot \max(xy1) \quad (4.19)$$

### CENTERBOARDS

Centerboards, drop keels, dagger boards etc. are treated in a similar manner. In the calculation of  $xxb$   $S(i)$  is taken as the cross sectional area for the section at the same longitudinal position as the point of maximum draft for the appendage. Also  $xy$  is now taken as the corrected draft for the hull with the fixed keel plus the corrected centerboard extension ( $ECE$ ).

$$xxb = \sqrt{\frac{4 \cdot S_{(max\ depth)}}{\pi \cdot BTR}} \quad (4.20)$$

$$DEF = DHK_{effective} + ECE \quad (4.21)$$

$$xxr1 = 0.5 \cdot \left( \frac{DEF}{xxb} + \sqrt{\left( \frac{DEF}{xxb} \right)^2 + 0.25 \cdot BTR^2 - 1} \right) \quad (4.22)$$

$$xxr2 = \sqrt{xxr1^2 - 0.5 \cdot (1 + 0.5 \cdot BTR)} \quad (4.23)$$

$$xy1 = xxb \cdot \left( xxr2 - \frac{0.25 \cdot (0.25 \cdot BTR^2 - 1)}{xxr2} \right) \quad (4.24)$$

MHSD is again calculated from the formula

$$MHSD = \max(0.92 \cdot xy1, MHSD_{nocenterboard}) \quad (4.25)$$

### TWIN (DOUBLE) KEELS AND BULBS

The twin keel is defined by the following inputs<sup>3</sup>:

- keel distance from bow
- vertical span
- mean chord lengths and thicknesses
- y-offset (distance from CL of fin)
- angle of fin to vertical

---

<sup>3</sup>2011

The viscous drag is calculated using the method described in Section 6.1.2, with the exception that the keels are not divided into horizontal stripes for the purpose of calculating the local section characteristics. The induced drag is calculated using the standard method described in section 6.5

The bulb is defined by the following inputs:

- Length
- max width
- max height

With these data the following bulb parameters are computed, which are then used to calculate the frictional and residuary resistance with the usual schemes (6.1.2 and 6.3.2):

$$\begin{aligned}\text{thickness\_chord\_ratio} &= \text{width/length} \\ \text{wetted\_area} &= 1.10 \cdot (\text{width} + \text{height}) \cdot \text{length} \\ \text{volume} &= 0.5 \cdot \text{width} \cdot \text{height} \cdot \text{length}\end{aligned}$$

#### 4.2.7 BULB/WING EFFECTS

The geometry of the keel tip is influential on the induced drag of the keel fin. These effects may be both positive and negative,

- A ballast bulb with circular (or elliptical) cross section reduces the effect span of the keel fin.
- A well designed wing keel extends the effective span of the keel.

The VPP contains an algorithm which detects the type and degree of “bulb” keel or “wing” keel and modifies the effective span, derived according to section 4.2.6.

#### DEFINITIONS

DHK0	geometric overall draft of keel
MAXW	max width of keel
TMAXW	draft at max width of keel
	<i>MAXW and TMAXW are corrected by “10° line test”</i>
FLAGBULB	1 if bulb is detected
FLAGWING	1 if winglets are detected
UPBULBF	upper shape factor for bulb
DeltaD	effective draft correction due to bulb and/or winglet.

#### WINGLET DETECTION

Winglets exist if a line from the maximum width location to a point located in a vertical plane of symmetry, in the same transverse section, vertically distant from the maximum width location less than MAXW/4 which does not lie somewhere in keel (Figure 4.3-1). Then WWING width is added by the wing.

#### BULB DETECTION

If winglets are not detected, a bulb exists if a line from the maximum width location to a point located in vertical plane of symmetry, in the same transverse section, vertically distant from max width location less than MAXW which does not lie somewhere in keel (Figure 4.3-2). Then WBULB is width added by bulb.

#### BULB + WINGLET DETECTION

In any case: MAXW= WBULB+WWING (Figure 4.3-3)

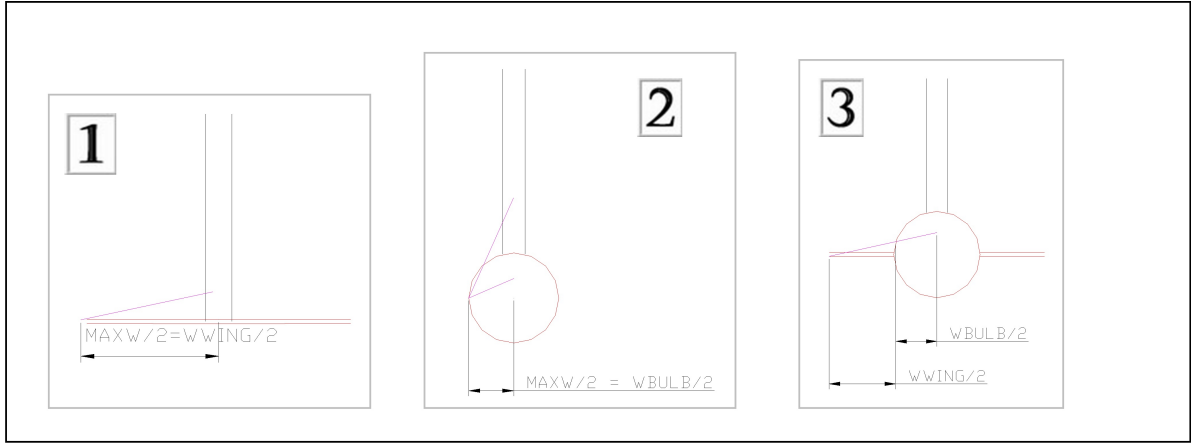


FIGURE 4.3: Bulb and winglet detection scheme

### DELTA<sub>D</sub> FORMULAS

Delta<sub>D</sub> is calculated with the following formulae and then corrected by the “limitations” defined below. The formulations are based on CFD calculations for eight bulb or winglet configurations. The multiplier of 0.5 applied to  $f_2$  is an arbitrary reduction of the bulb credit.

$$\frac{\Delta D}{MHSD} = \frac{DHK_0 - TMAXW}{0.5 \cdot MAXW} \cdot \left( Flagbulb \cdot UPBULBF \cdot 0.5 \cdot f_2 \left( \frac{WBULB}{DHK_0} \right) \cdot \frac{WBULB}{Flagwing \cdot WWING + WBULB} \cdot Flagwing \cdot f_3 \left( \frac{MAXW}{DHK_0} \right) \right) \quad (4.26)$$

Note that:

- $f_2$  addresses the bulb effect if there is no winglet
- $f_3$  addresses winglet effect if there is no bulb
- the case where bulb and winglet exist the interactions are taken into account by multiplying  $f_2$  value by the  $WBULB/(Flagwing \cdot WWING + WBULB)$  term

where:

$$\begin{aligned} f_1(X) &= 1 + k_1 \cdot X & \text{if } X < 1 \\ &= 1 + k_1 & \text{if } X > 1 \\ f_2(X) &= k_{2_0} + k_{2_1} \cdot (X - wbu\_T0) & \text{if } X > wbu\_T0 \\ &= k_{2_0} \cdot X / wbu\_T0 & \text{if } X \leq wbu\_T0 \\ f_3(X) &= k_{3_0} \cdot X / wwi\_T0 & \text{if } X < wwi\_T0 \\ &= k_{3_0} + k_{3_1} \cdot (X - wwi\_T0) & \text{if } X \geq wwi\_T0 \end{aligned}$$

$k_1$	0.6
$k_{2_0}$	-0.06
$k_{2_1}$	0.19
$k_{3_0}$	0.05
$k_{3_1}$	0.02
$wbu\_T0$	0.15
$wwi\_T0$	0.5

### UPPER SHAPE FACTOR FOR BULB

UPBULBF is introduced to take into account that end effect of the bulb depends of the shape of the top of the bulb. A straight shape (e.g. a Scheel Keel) has a positive effect, although a round shape has negative effect on effective draft.

Moreover UPBULBF helps to smooth the jump of Delta<sub>D</sub> when a bulb becomes winglet. UPBULBF is defined as follows:

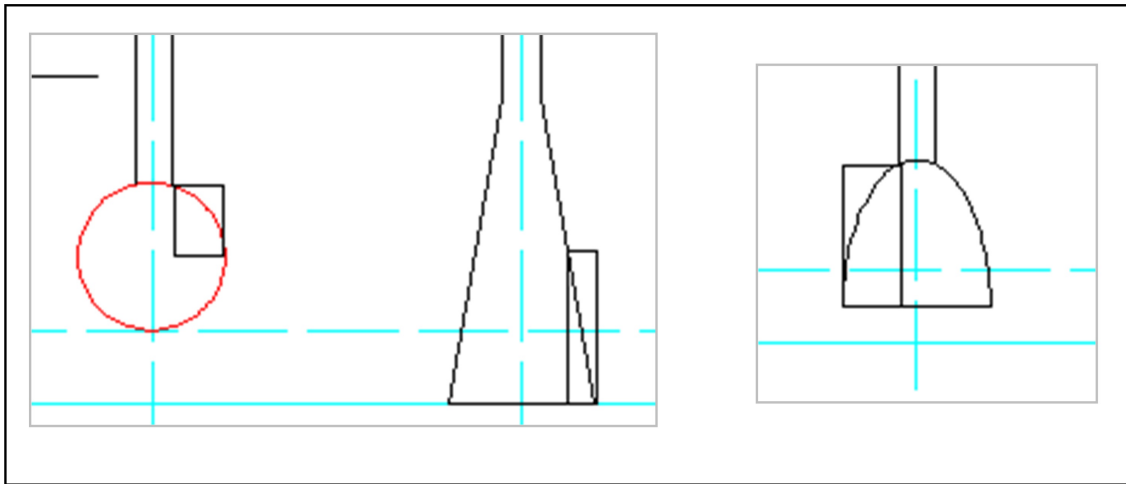


FIGURE 4.4: Upper Bulb shape factor examples

1. Consider the rectangle defined by opposite corners at the maximum width bulb point and a point on the top surface of the bulb located at  $0.05 * DHK0$  off the centerline. Calculate the area  $Ar$
2. Consider the enclosed part of the bulb in the rectangle. Calculate the area  $Abu$
3. Define the upper bulb shape factor  $UPBULBF = f4(Abu/Ar)$ :  $f4(1) = 1$  for  $x = 0.825$ ,  $f4(0.3) = 0.3$ ,  $f4$  linear function.
4. In the bulb wing formula, multiply  $f2$  by  $UPBULBF$ .

#### LIMITATIONS

$\Delta D > -0.025 * DHK0$  (credit bulb limitation)

If the widest point of the bulb or winglet is not enough deep with respect to  $DHK0$  and  $MAXW$ , the bulb or winglet are considered to have no effect:

$\Delta D = 0$  if  $TMAXW + 3 * MAXW/2 < DHK0$

$\Delta D$  is not affected if  $TMAXW + MAXW/2 > DHK0$

$\Delta D$  varies linearly between those two situations.

#### SMOOTHING TECHNIQUE

Because the detection scheme must work on old offset files, which may have sparse data points in the area of the keel tip, it is important to avoid catching spurious “widest points”. When, going down along the bulb/winglet section, the point of max width is found, at that point the “10 deg line test” is applied.

The test is to trace an almost vertical line downward, inclined 10 degrees inboard. The lowest offset point that lies “external” to that line is taken as the widest point of the section, in way of the actual widest point. At this point the test is applied for winglet and bulb (see Figure 4.5).

### 4.3 APPENDAGE WETTED AREAS AND LENGTHS

The original VPP formulations were concerned only with “conventional” fin keel and rudder configurations. Subsequently the ability to handle off-center appendages, and canting keels has been added.

#### 4.3.1 CONVENTIONAL FIN KEEL AND RUDDER

The keel and rudder are divided into 5 horizontal strips and a wetted surface area together with a mean length and thickness to chord ratio is calculated for each strip<sup>4</sup>. These values are used to calculate the viscous resistance of the

<sup>4</sup>up to 2015 the wetted area of second to fifth strip was the *projected* area of the strip on to the centerplane. For the first strip the real wetted area was used, because this is the strip containing the bulb, if there is one. After discovering that for some configuration the bulb was partially in the

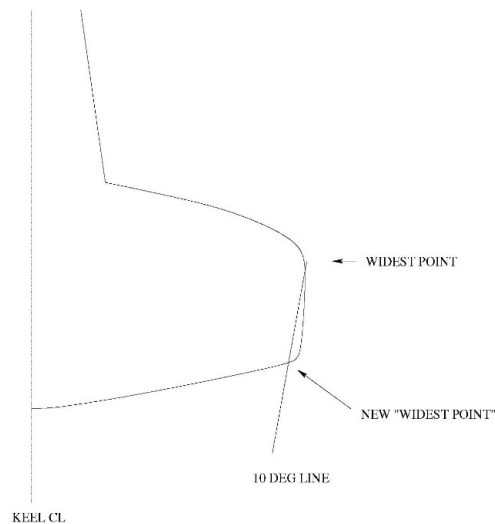


FIGURE 4.5: *Widest point detection*

appendages. In this case the volume of the fin keel and any associated bulb is calculated so that the contribution to wave making resistance may be calculated.

#### 4.3.2 OTHER APPENDAGES

The LPP can deal with twin rudders, centerboards, forward rudders, fixed or retractable dagger boards. These appendages can be added into the .DXT file based on their measured dimensions, rather than including them in the wanded .OFF file data. Only the viscous drag of these appendages is calculated, based on methods described in detail in section 6.1.2. The LPP also calculates any reduction of wetted surface area that occurs if any dagger board, twin rudder etc. comes above the flotation waterline.

### 4.4 RIGHTING MOMENT

The righting moment balances the heeling moment produced by the sailplan, and is the sum of several components:

$$RM = RM_{hull} + RM_{crew} + RMV + RM_{movable-ballast} + RM_{DSS} \quad (4.27)$$

where the hull term is the restoring moment of the hull in sailing displacement, the second is the moment generated by moving the declared crew weight on the rail,  $RMV$  is the dynamic righting moment, and  $RM_{DSS}$  and  $RM_{movable-ballast}$  are the contributions of the movable ballast (canting keel and/or water ballast) and of the Dynamic Stability System, whenever they are present.

#### 4.4.1 RIGHTING ARM CURVE

The LPP calculates a righting arm against heel angle curve (Figure 4.6), for the boat in sailing displacement.

For a boat with movable ballast the curves are two, one with the ballast on the CL, the second with the ballast on one side: this latter is non symmetric through the (-180,180) degrees range of heel, and includes both the terms  $RM_{hydrostatic}$  and  $RM_{movable-ballast}$  of formula (4.27). An example is shown in Fig.4.7. The portion between 0 and 180 degrees has the ballast to windward, while the range between -180 and 0 is calculated with the ballast to leeward, and has opposite sign because of the way the arm is defined: within this range a negative righting arm means positive stability.

#### 4.4.2 HYDRODYNAMIC CENTRE OF PRESSURE

The hydrodynamic vertical center of pressure  $RM4$  is given by:

$$RM4 = 0.43 \cdot T_{max} \quad (4.28)$$

second strip, since 2016 for all the appendages the real wetted area is used.

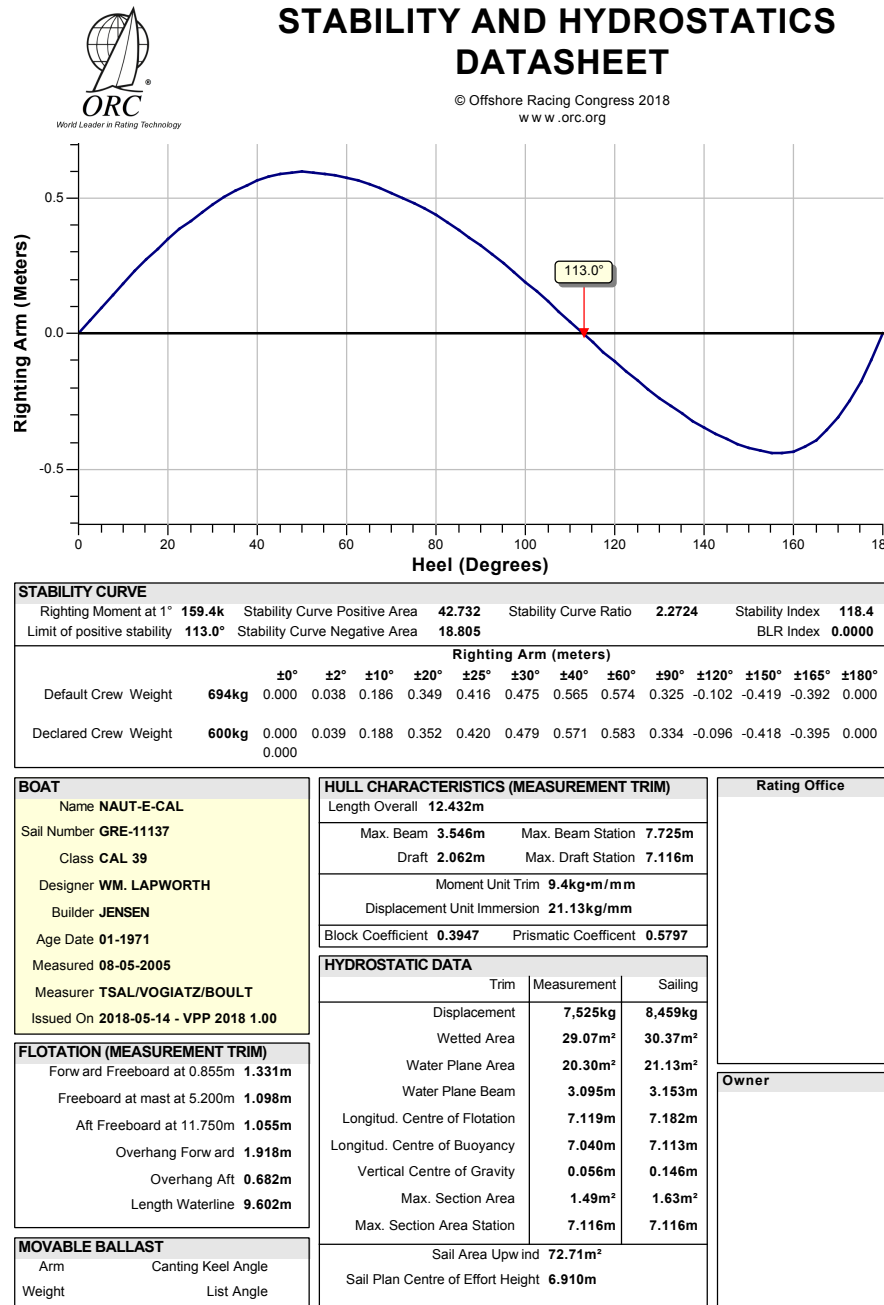


FIGURE 4.6: Typical righting arm curve and hydrostatic data output

where  $T_{max}$  is the maximum draft.

#### 4.4.3 CREW RIGHTING MOMENT

The crew righting moment is based on the declared crew weight or a default crew weight calculated from  $CW = 25.8 \cdot LSM^{0.4262}$ . The assumed individual crew weight is 89 kg and the number of crew is calculated by dividing the crew weight by this value.

#### LSM GREATER THAN 4.9M (16 FEET)

When  $LSM > 4.9 \text{ m}$ , two less than the total number of crew are distributed along the deck edge of the boat centered about the assumed centre of gravity position, a single crew member is assumed to occupy a width of 0.53m.



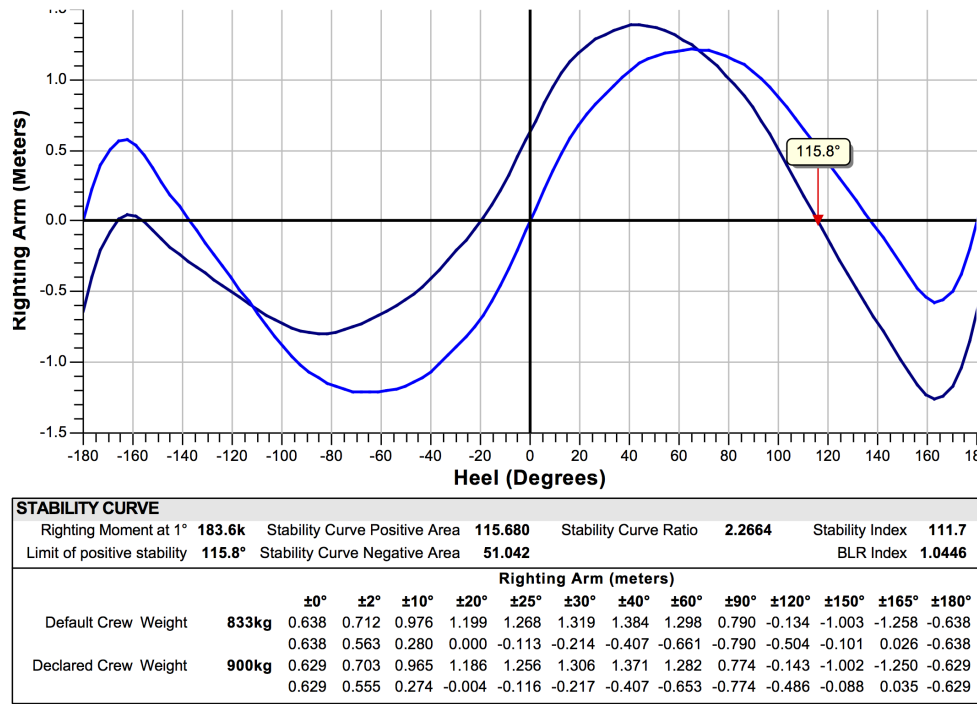


FIGURE 4.7: Typical righting arm curve of a boat with movable ballast

The lever arm of the crew on the rail is the average hull beam over the length of side deck occupied by the crew. The remaining 2 crew members, the helmsman and main trimmer are assumed to have transverse centre's of gravity at 70% of the yachts maximum half beam.

For Sportboats a Crewarm Extension Factor (CEXT) may be used, which takes into account the more radical transverse position of the crew for this boat types having hiking straps and/or trapezes. Crew hiking is assumed to have a righting arm 0.5 m outside of the rail, while crew on the trapeze is supposed to have an arm 1.2 m outside of the rail.

$$Crew \cdot rightingarm = \left( CARM \cdot CREWRW + 0.7 \cdot 2 \cdot \frac{B_{max}}{2} \cdot bodywt \right) \cdot \cos(heel) \quad (4.29)$$

where:

CARM	=	Crew righting arm
CREWRW	=	Crew weight on the rail
Bmax	=	Hull maximum
bodywt	=	Average crew body weight.
heel	=	Heel angle

#### LSM LESS THAN 4.9M

For yachts with LSM less than 4.9 m the crew weight is all sat on the rail.

$$Crew \cdot rightingarm = (CARM \cdot CREWRW) \cdot \cos(heel) \quad (4.30)$$

#### CREW WEIGHT TRANSVERSE POSITION

Up to 2018 the crew transverse position followed a prescribed law established for all yachts: the crew was sat on the leeward side up to a certain heel and the smoothly moved to windward. Since 2019 the crew trasverse position (better, its righting or heeling moment) is used as an optimisation parameter, searching for the position that maximises the boat velocity (or vmg), exactly in the same way as the sail depowering parameters are used. As a consequence the solvers looks for each boat at the ideal heel angle at each specific sailing point (TWS and TWA).

#### 4.4.4 DYNAMIC RIGHTING MOMENT. RMV

RMV is a term intended to account for the difference between the hydrostatic righting moment calculated by the LPP, and the actual righting moment produced by the hull when moving through the water. This term was in the VPP from its first implementation<sup>5</sup>.

$$RMV = \frac{5.955 \cdot 10^{-5}}{3} \cdot DSPL \cdot LSM \cdot \left(1 - 6.25 \frac{B_{cb}}{\sqrt{AMS1_{cb}}} - 2.1\right) \cdot SLR \cdot \phi \quad (4.31)$$

where

$DSPL$	=	Displacement
$B_{cb}$	=	Canoe body beam
$AMS1_{cb}$	=	Maximum section area of canoe body
$SLR$	=	Speed length ratio

#### DYNAMIC STABILITY SYSTEM (DSS)

The DSS is the deployment of an approximately horizontal hydrofoil on the leeward side of the yacht that generates a vertical force component to augment the yachts righting moment. Since 2010 the VPP is able to calculate the drag and increased righting moment available from a DSS. The data input file take in the geometrical data of the foil's size and position and use a simple algorithm to calculate the increased righting moment of the foil. The lift force is proportional to the square of the yachts speed, and the maximum extra righting moment capped at a percentage of the yachts typical sailing righting moment. Like all features of the ORC VPP this force prediction algorithm is intended to provide an equitable handicap for yachts fitted with the DSS. It is not a "design and optimization" tool.

#### 4.4.5 RATED RIGHTING MOMENT

When predicting the performances of the boat (and therefore the handicaps), the VPP makes use of an *averaged* stability calculation: the VCG of the yacht is computed by using the following weighed average between the *measured* and the *default* righting moment at 1 degree of heel<sup>6</sup>:

$$RM@1_{rated} = \frac{2}{3} \cdot RM@1_{measured} + \frac{1}{3} \cdot RM@1_{default} \quad (4.32)$$

Default righting moment is calculated as follows<sup>7</sup>:

$$RM@1_{default} = 1.025 \cdot \left( a_0 + a_1 \cdot IMSBTR + a_2 \cdot \frac{VOL^{1/3}}{IMSL} + a_3 \cdot \frac{SA \cdot HA}{IMSB^3} + a_4 \cdot \frac{IMSB}{VOL^{1/3}} \right) \cdot DSPM \cdot IMSL \quad (4.33)$$

where all the variables are calculated by the VPP using the following coefficient values.

$a_0$	=	-0.00410481856369339 (regression coefficient)
$a_1$	=	-0.0000399900056441 (regression coefficient)
$a_2$	=	-0.0001700878169134 (regression coefficient)
$a_3$	=	0.00001918314177143 (regression coefficient)
$a_4$	=	0.00360273975568493 (regression coefficient)
$DSPM$	=	displacement in sailing trim
$SA$	=	sail area upwind
$HA$	=	heeling arm, defined as

$$\frac{CEH_{main} \cdot A_{main} + CEH_{headsail} \cdot A_{headsail} + CEH_{mizzen} \cdot A_{mizzen}}{SA} + HBI + DHKA \cdot 0.45$$

$CEH$	=	height of centre of effort
$DHKA$	=	Draft of keel and hull adjusted

<sup>5</sup>The divisor of 3 in the first term was introduced in 2000 to correct an over-prediction of RMV for contemporary hull forms

<sup>6</sup>2015

<sup>7</sup>1.025 multiplier added in 2013

Default righting moment shall not be taken greater than  $1.3 * RM@1_{measured}$  nor smaller than  $0.7 * RM@1_{measured}$ .

For movable ballast boats the default righting moment intends to predict the righting moment of the boat without the effect of movable ballast (water tanks empty, or keel on the center plane), is then decreased by a factor  $(1 - RM@25_{movable}/RM@25_{tot})$ , where  $RM@25_{movable}$  is the righting moment due to the contribution of movable ballast at 25 degrees of heel, and  $RM@25_{tot}$  is the total righting moment at 25 degrees, with keel canted or windward tanks full. Both  $RM@25_{movable}$  and  $RM@25_{tot}$  are calculated on the basis of the measured  $RM@1$ . For these boats, the max and min bounds are set to  $1.0 * RM@1_{measured}$  and  $0.9 * RM@1_{measured}$  respectively. If righting moment is not measured or obtained from another source, the rated righting moment shall be increased for 3% and shall not be taken less than one giving the Limit of positive stability (LPS) of 103.0 degrees or 90.0 degrees for an ORC Sportboat.

## 5 AERODYNAMIC FORCES

The VPP assumes that each individual sail, mainsail, jib, spinnaker, gennaker or code zero can be characterized by a maximum achievable lift coefficient and a corresponding viscous drag coefficient that are continuous functions of apparent wind angle. The values of these coefficients are adjusted depending on the exact sail type and the mast and rigging configuration. The individual coefficients are then combined into a set of complete sail plan (main and jib, or main and spinnaker) coefficients.

In order to simulate the reduction of heeling force by the crew trimming and changing sails *Flat* and *Reef* parameters are used.

The flat parameter is used to simulate the reduction of the lift coefficient. It reduces from a value of 1.0, associated with maximum lift, to a minimum value of 0.62 for normally rigged yachts<sup>1</sup>, i.e. the lift coefficient reduced by 38%.

The reef parameter simulates the reduction of sail area. When reefing is required to achieve optimum performance the genoa sail area is first reduced until the genoa reaches its minimum foot length, then if further heeling force reduction is required the mainsail is reefed.

The VPP optimizer is at liberty to de-power the sails by reducing the maximum lift coefficient (*Flat*) and reduce sail size (*Reef*) to achieve best performance at each prescribed true wind angle and velocity.

### 5.1 METHODOLOGY

The aerodynamic forces acting on the yacht are resolved into two orthogonal components, lift and drag. The lift force acts perpendicular to the apparent wind direction and the drag force acts parallel to it. The force model incorporates 3 sources of drag:

1. The base drag associated with the windage of the hull, spars, rigging and crew;
2. The parasitic drag associated with the skin friction drag of the sails, and the pressure drag associated with flow separation. The parasitic drag is assumed not to depend on the sail lift force, it does however vary with the point of sailing;
3. The induced drag, which arises from the three-dimensional nature of the flow around the sails, and the loss of circulation from the head and foot of the sails. The induced drag is assumed to vary as the square of the lift coefficient. A two-dimensional lift dependant drag term is also added to the basic induced drag.

Analysis of the rig begins by ascribing the appropriate coefficient set to the main, jib and offwind sails. The frontal and side areas associated with the mast, hull and rigging are also calculated. Each area has an associated vertical centre of force which represents the height at which all the aerodynamic loads could be concentrated to produce the same overall rolling moment. Because the presence of a wind gradient implies that the wind velocity is a function of height, the vertical heights of the centres of force are used when evaluating the dynamic pressure acting on any aerodynamic surface.

#### 5.1.1 INDIVIDUAL SAIL AREAS AND 2-DIMENSIONAL AERODYNAMIC FORCE COEFFICIENTS

The fundamental components of the aerodynamic model are the individual sails, characterised by the following parameters, which are shown diagrammatically in Figure 5.1:

- Sail area
- Centre of effort height above the sail's datum
- $CL_{max}$  and  $CD0$  versus  $\beta_{AW}$  envelope. (Maximum lift coefficient and parasitic (viscous) drag coefficient versus apparent wind angle).

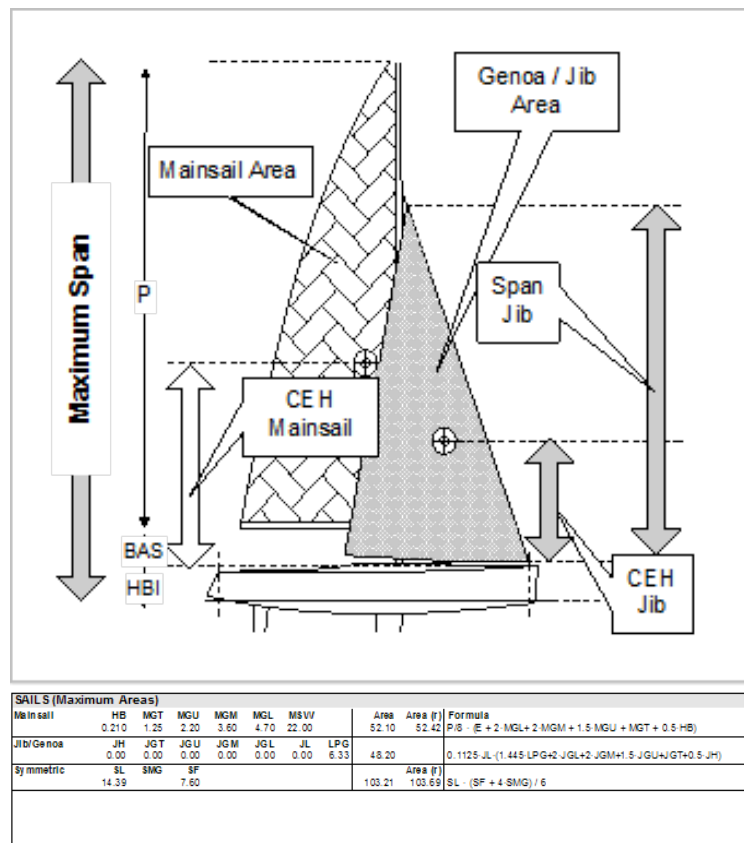


FIGURE 5.1: Sail parameters

Figure 5.2 shows the individual two-dimensional coefficients for the 3 sail types originally supported by the VPP. The characteristics of the mainsail and jib and spinnaker were derived empirically when the sail force model was introduced<sup>2</sup>. The coefficient values, which are based on cloth area, show typical effects:

- As apparent wind angle increases a rapid rise in lift to a peak value prior to the onset of separation and stall.
- The sails 'fill' at different apparent wind angles, reflecting the different sheeting arrangements and shapes of the sails.
- At an apparent wind angle of 180 degrees, approximating to an angle of attack of 90 degrees, the lift has declined to zero and the drag coefficient increased to 1.0.

### 5.1.2 SIMPLIFIED RIGGING COEFFICIENTS

This reflects the ability of yachts with more complex fore and aft staying arrangements to adjust their sails for best performance. The Mainsail and Jib may have varying lift and drag force coefficients depending on the ability to change the camber of the sails by adjustable stays.

For both sail types a low and a high set of lift and drag coefficients exist. In the application of the coefficients adjustable forestays, backstays, and running backstays are considered. The details of the scheme are described in sections 5.2.1 for the mainsail and 5.2.2 for the jib.

<sup>1</sup>This minimum flat value of 0.62 is based on the lift force reduction that has been observed in wind tunnel tests

<sup>2</sup>The aerodynamic coefficients of the sails have been adjusted and modified a number of times in order to follow the sail performance development. Furthermore, while in the old days some *efficiency* factors were adopted for the sails areas (1/1.16 for the mainsail, 0.6 for the symmetric spinnaker, 0.72 for the asymmetric), more recently this approach has been abandoned and the aero coefficients are based on the rated sail areas, which are close to the geometric sail areas. The last adjustment to the coefficients of single sails was done in 2016.

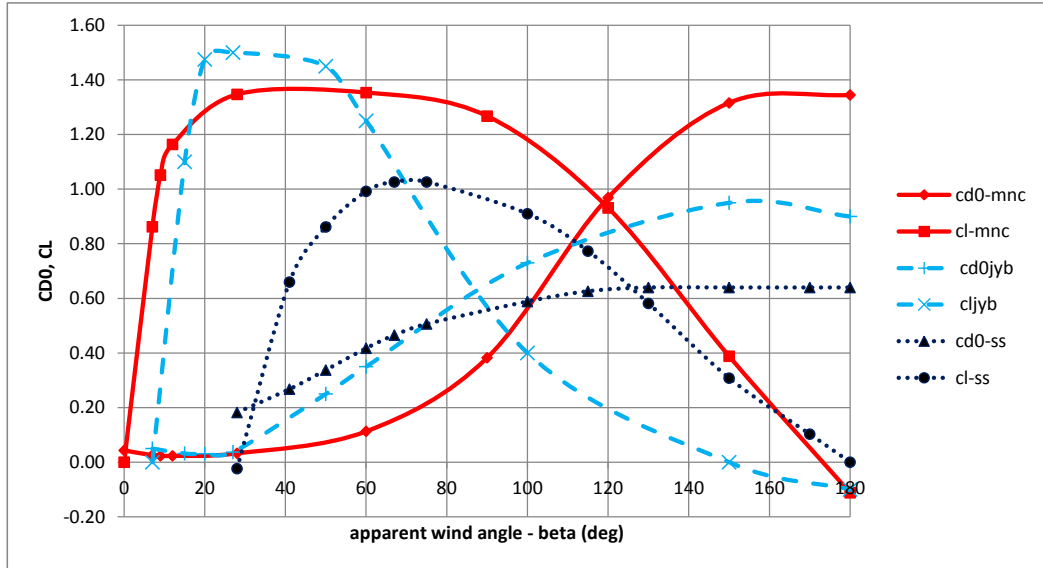


FIGURE 5.2: Basic Sail Force Coefficients

### 5.1.3 OPTIMIZATION AND DE-POWERING

#### REVISED OPTIMIZATION SCHEME

Traditionally (pre 2010) the VPP aerodynamic model has been free to adjust the sail power (*Flat*) and area (*Reef*) independently to achieve the highest sailing speed at each True Wind Angle. This is time consuming for the optimization computer code, and does not reflect the way in which yachts are sailed, in that reefing is usually delayed until the sails are fully flattened. The new<sup>3</sup> sail trimming scheme adopts the following methodology to reduce sail heeling moment as wind speed increases.

1. Reduce *Flat* progressively to  $Flat_{MIN}$ .  $Flat_{MIN} = 0.62 \times Flat_8$ .  $Flat_8$  is the *flat* value used with jib upwind at TWS=8 kt and TWA=52 degrees. This remodulation of the minimum is done with the aim of giving the same amount of relative *flat* reduction even for boats using a certain amount of depowering already in light winds.
2. Once  $Flat_{MIN}$  is reached reduce jib area progressively to the minimum jib area. (Still using  $Flat = Flat_{MIN}$ )
3. Once the Minimum jib area is reached reduce mainsail area. (Still using  $Flat = Flat_{MIN}$ )

#### DE-POWERING WITH JIB

The de-powering scheme is based on new VPP variables *ftj*, and *rfm* working with a new<sup>4</sup> optimization parameter RED that replaces the traditional *reef* parameter.

*ftj* = jib foot parameter *ftj*=1 full size jib, *ftj*=0 minimum jib  
*rfm* = is the main reduction factor, *Rfm*=1 full main, *rfm*=0 no main. Works like the old Reef function but on the mainsail only.

RED is a combination of these 2 factors into a single optimization parameter.

RED = 2 then *ftj*=*rfm*=1, i.e. full sail  
 RED = 1 then *ftj*=0, *rfm*=1, i.e. jib at minimum size  
 RED < 1 then *ftj*=0 and *rfm*<1.

The usual *reef* parameter, comparing in the output of the VPP, when the headsail is a jib or genoa it has to be read as a re-parametrization of the RED parameter, by means the simple relation  $reef = RED/2$ . The progressive de-powering scheme is shown graphically in Figure 5.3. At each stage in the process the current sail area, fractionality

<sup>3</sup>2010

<sup>4</sup>2009

and overlap are calculated and the values used to calculate the Effective rig height and vertical centre of pressure position.

In 2016 a further refinement has been modeled for the above depowering sequence: the jib foot reduction is carried on down to a LPG of 105% before any jib luff reduction. From that point on, the luff and foot reduction are performed together. The total sail forces are now calculated during each VPP iteration<sup>5</sup>. The process is described in Figure 5.4.

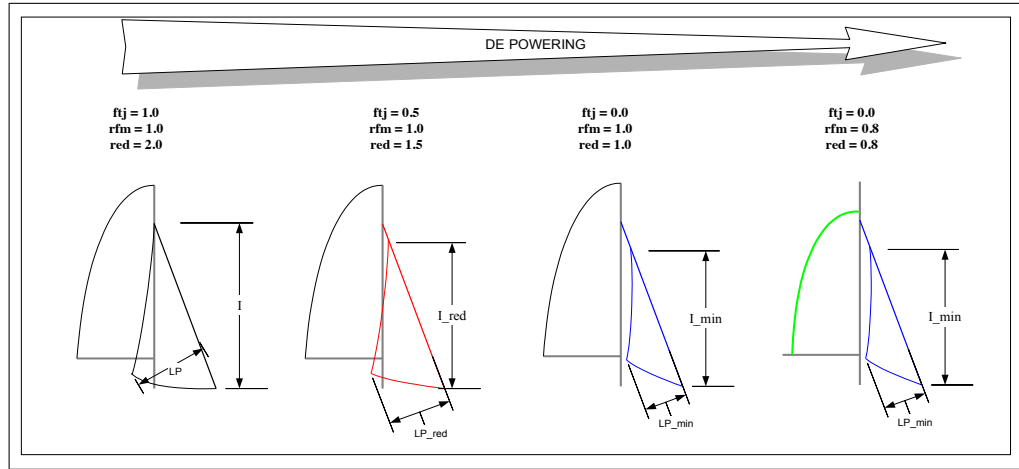


FIGURE 5.3: De-powering scheme

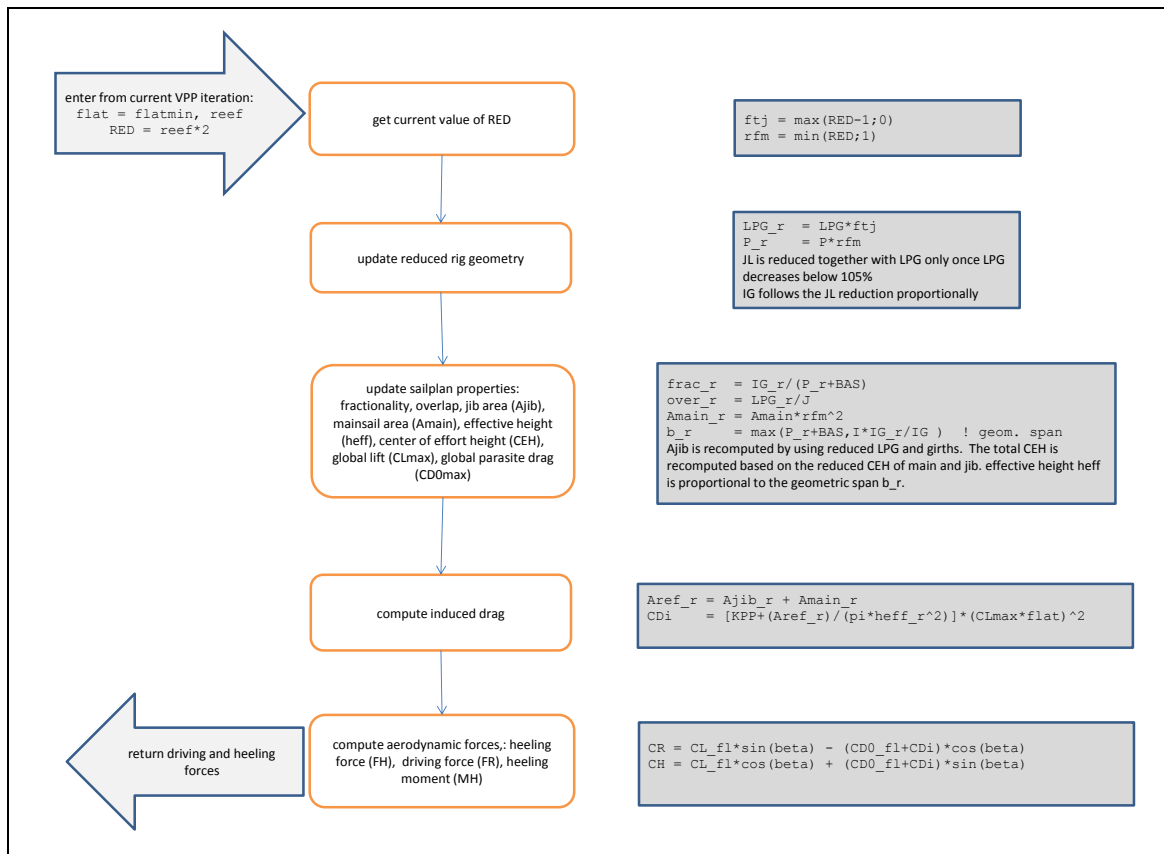


FIGURE 5.4: Routine for de-powering

<sup>5</sup>rather than adopting the *RIGANAL* approach of the old code where as much of the aero model as possible was pre-calculated before the VPP itself was run. The current approach would not have been possible even 10 years ago due to the extra burden of calculation making the VPP too slow to run routinely

## 5.2 SAIL AREAS & COEFFICIENTS

### 5.2.1 MAINSAIL

#### MAINSAIL AREA AND ROACH

Mainsail area is the physical cloth area of the largest mainsail in the yacht's sail inventory<sup>6</sup>.

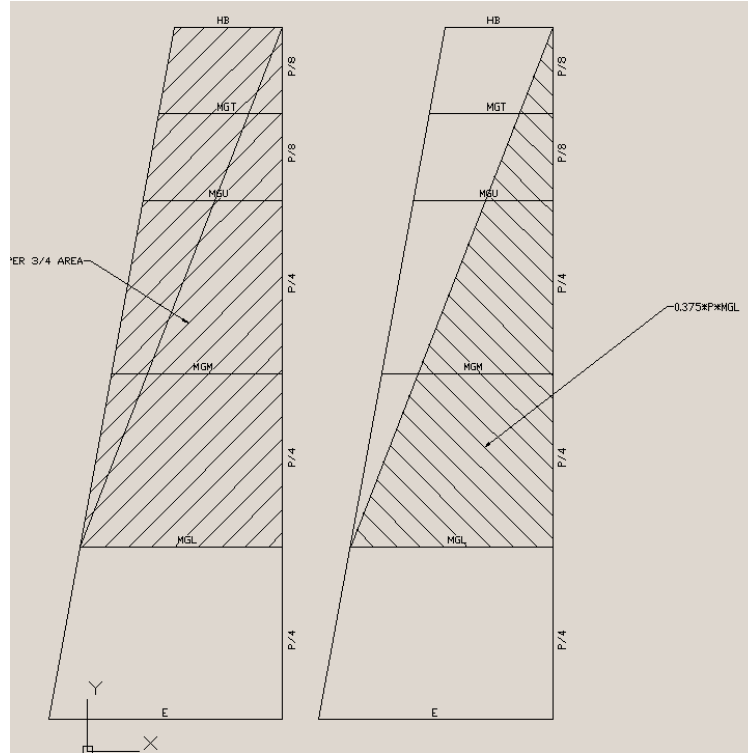


FIGURE 5.5: Roach calculation

In 2010 a revised scheme for determining the height of the girth sections was adopted. The heights are calculated using the following formula which must be calculated in the order presented.

$$\begin{aligned}
 MWH &= \frac{P}{2} + \frac{MWH - E/2}{P} \cdot E \\
 MQWH &= \frac{MWH}{2} + \frac{MQW - (E + MWH)/2}{MWH} \cdot (E - MWH) \\
 MTWH &= \frac{MWH + P}{2} + \frac{MTW - MWH/2}{P - MWH} \cdot MWH \\
 MUWH &= \frac{MTWH + P}{2} + \frac{MUW - MTW/2}{P - MTWH} \cdot MTW
 \end{aligned} \tag{5.1}$$

Mainsail rated area is then calculated as follows:

$$\begin{aligned}
 Area &= \frac{MQW + E}{2} \cdot MQWH + \frac{MQW + MWH}{2} \cdot (MWH - MQWH) + \\
 &\quad \frac{MWH + MTW}{2} \cdot (MTWH - MWH) + \frac{MUW + MTW}{2} \cdot (MUWH - MTWH) + \\
 &\quad \frac{MUW + MHB}{2} \cdot (P - MUWH)
 \end{aligned} \tag{5.2}$$

The boom depth (BD) limit is  $0.06 \cdot E$ . If BD exceeds its limit, mainsail area shall be increased by  $2 \cdot E \cdot (BD - 0.06 \cdot E)$ . The amount of roach will proportionally increase the rated area from the measured one. A parameter *roach*

<sup>6</sup>Before 2010 the area was calculated as follows:  $Area_{Main} = \frac{P}{8} \cdot (E + 2MQW + 2MWH + 1.5MTW + MUW + 0.5MHB)$ . Presently this formula is still used, due to its simplicity, by the ORC Manager for what is called the *measured* area, written also on the certificate



is calculated to define the planform shape of the mainsail:

$$ROACH = \frac{\frac{upper\_3/4\_area}{0.375 \cdot P \cdot MQW} - 1}{0.844} \quad (5.3)$$

The roach is calculated in the upper 3/4 part of the mainsail to avoid any influence of E (that is not measured on the sail). The upper 3/4 area of the mainsail is calculated as follows:

$$Upper\_3/4\_area = \frac{P}{8} \cdot (MQW + 2MHW + 1.5MTW + MUW + 0.5MHB) \quad (5.4)$$

A roach value of zero corresponds to a main with triangular 3/4 upper part. Negative roaches are accounted as zero. A value greater than this indicates a degree of “big headedness”<sup>7</sup>. The constant 0.844 is introduced to normalize the roach measurement with the roach measured in wind tunnel based on  $P \cdot E/2$  triangle.

## MAINSAIL COEFFICIENTS

The mainsail may have either of two coefficient sets as shown in Table 5.1, the standard mainsail and one based on having no adjustable check stays. The “simple” main without checkstays is characterized by a reduced maximum available Lift Coefficient resulting from the inability to increase sail camber in light airs through the use of check stays, as shown in Figure 5.6 .

Nomenclature:

kpm	=	two dimensional quadratic viscous drag coefficient
beta	=	Apparent wind angle (deg)
CD	=	Drag Coefficient
CL	=	Lift Coefficient

MAINSAIL										
kpm	0.01379									
$\beta$	0	7	9	12	28	60	90	120	150	180
cdnc- $CD_{low}$	0.04310	0.02586	0.02328	0.02328	0.03259	0.11302	0.38250	0.96888	1.31578	1.34483
clnc- $CL_{low}$	0.00000	0.86207	1.05172	1.16379	1.34698	1.35345	1.26724	0.93103	0.38793	-0.11207
cdyc- $CD_{hi}$	0.03448	0.01724	0.01466	0.01466	0.02586	0.11302	0.38250	0.96888	1.31578	1.34483
clyc- $CL_{hi}$	0.00000	0.94828	1.13793	1.25000	1.42681	1.38319	1.26724	0.93103	0.38793	-0.11207

TABLE 5.1: Mainsail force coefficients

The low set of lift and drag coefficients ( $CL_{low}$ ) is used when there is neither a backstay nor a pair of running backstays or in case of one pair of running backstays only. With two or more backstays (regardless of type) the high set of coefficients ( $CL_{high}$ ) is applied. Table 5.2 shows the matrix of rated rigging arrangements and corresponding main sail force coefficient sets.

L	=	Low Lift associated with low mainsail adjustability.
H	=	High Lift associated with increased mast bend control.
M	=	intermediate coefficient set depending on rig fractionality.

In the case of a backstay being fitted but without running backstays, a fractionality coefficient  $f_{coef}$  is derived which controls the effect of the backstay on the mainsail shape. This is shown diagrammatically in Figure 5.7.

$$f_{coef} = \sqrt{\sin \left[ \frac{\pi}{0.6} \cdot \min \left( 0.3; \max \left( 0; \frac{1}{Fractionality} - 1 \right) \right) \right]} \quad (5.5)$$

For the configuration with one pair of backstays only, a medium level set of coefficients is calculated:

$$C_{medium} = C_{low} \cdot \left( 1 - \frac{f_{coef}}{2} \right) + C_{high} \cdot \frac{f_{coef}}{2} \quad (5.6)$$

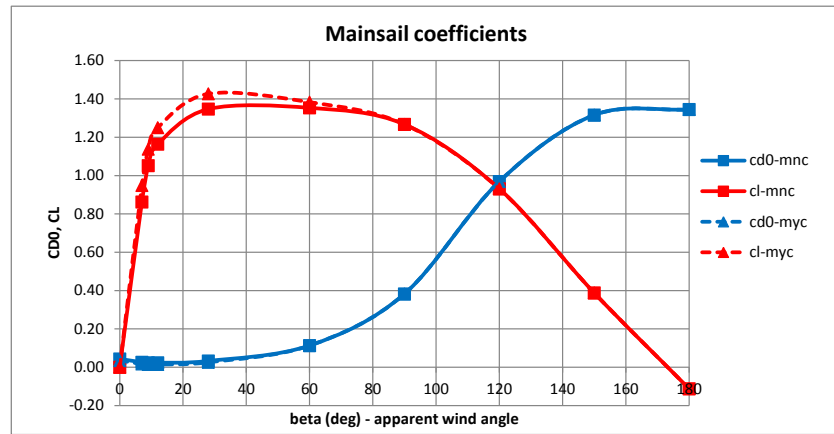


FIGURE 5.6: Alternative Mainsail force coefficients

Mainsail Coefficients				
BACKSTAY	FORESTAY			
	fixed	adj fwd	adj aft	adj aft&fwd
None	L	L	error (M)	error (M)
Backstay only	L	L	M	M
Running Backstay only	warning (L)	warning (L)	L	L
2 or more Backstays and/or adjustable inner forestay	H	H	H	H

$L = C_{low}$   
 $M = C_{moderate} = C_{low} * (1 - Coef/2) + C_{high\_new} * Coef/2$   
 $H = C_{high\_new} = (C_{low} + C_{high\_old}) / 2$

TABLE 5.2: Application of Alternative Coefficient sets for Mainsails

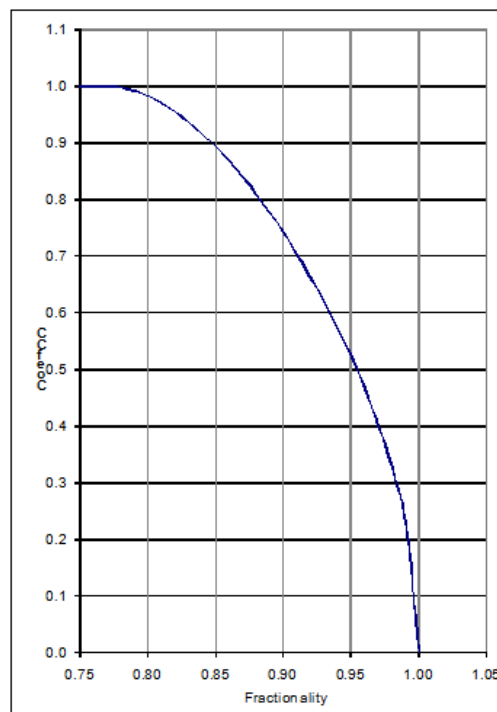


FIGURE 5.7: Fractionality Coefficient

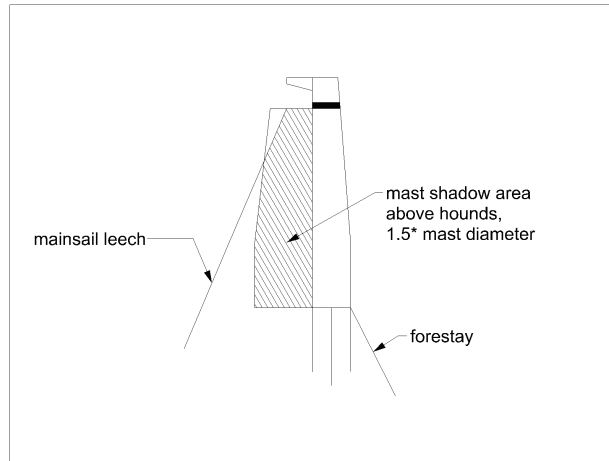


FIGURE 5.8: *shadow effect of the mast portion above the hounds*

### MAST SHADOW EFFECT

In 2016 it has been introduced (better, re-introduced, because the very same effect was modeled by ITC experts many years ago) a model taking into account the shadow effect of the mast portion above the hounds on the mainsail. The effect is taken into account by calculating the portion of mainsail that is included in a strip wide 1.5 the average mast diameter  $0.5(MDL + MDT)$  calculated at that height. That portion of area is subtracted to the mainsail area.

### LOW TECHNOLOGY SAIL CLOTH

When the sails are made of low technology material, as woven polyester sail cloth, a credit is applied to the mainsail coefficients, by slightly modifying both drag and lift coefficients by the following amounts: The credit has

$\beta$	0	7	9	12	28	60	90	120	150	180
dcd	0.0028	0.0028	0.0028	0.0028	0.0028	0.0	0.0	0.0	0.0	0.0
dcl	0.0000	0.0284	0.0284	0.0284	0.0284	0.0085	0.0	0.0	0.0	0.0

TABLE 5.3: *Mainsail low tech material credit*

been reduced in 2016 to 33% of the 2015 credit.

### CENTRE OF EFFORT (CE) CALCULATION

The mainsail centre of effort is calculated as the centroid of area of the projected mainsail trapezoid areas, plus a constant, that is  $0.024 \cdot P$ .

$$CEH = \frac{\sum_i A_i \cdot z_{c_i}}{\sum_i A_i} + 0.024 \cdot P \quad (5.7)$$

where  $A_i$  are the areas of trapezoids formed by the girths, portion of the luff and portion of the leech, and  $z_{c_i}$  is the height above the P base of the centroid of each trapezoid. The constant was chosen in the past, when it was introduced the formulation based on trapezes areas, in order to maintain, for a mainsail with default girths, the value of  $CEH = 0.39P$ , that was used before. Since 2011 the default girths were modified, so that with the present defaults we have  $CEH = 0.40 \cdot P$ .

### 5.2.2 JIB OR GENOA

The jib also has 2 possible coefficient sets depending on whether the forestay can be adjusted whilst racing. If it can be adjusted the jib has a higher maximum Lift Coefficient to reflect the fact that sail camber can be increased in light airs by easing the head stay.

<sup>7</sup>2013

## GENOA AREA

Jib rated area is be the biggest area of any jib/genoa in the sail inventory calculated as follows:

$$Jib\_area = 0.1125HLU(1.445HLP + 2HQW + 2HHW + 1.5HTW + HUW + 0.5HHB) \quad (5.8)$$

using the girths measured as per the ERS (ERS 2016). The above formula is the area of a genoa where the portion above the  $HLP$  is divided into trapezes bounded by the girths and by portions of leech and luff, while the portion below the  $HLP$  is estimated as a triangle, where the sides are the  $HLP$ , the foot, and a portion of the luff, equal to  $0.1 \cdot HLU$ . Since 2022 the minimum size of the jib (*default jib*) has been eliminated, a boat may carry only a mainsail and does not have any penalty in sail area for this arrangement.

## GENOA AERODYNAMIC COEFFICIENTS

A similar approach to the mainsail is applied for the set of lift and drag coefficients of the jib, as shown in Table 5.4. The low set of coefficients is applied only when there is neither a backstay nor an adjustable forestay. If the forestay is adjustable or in the case of one or more pairs of running backstays the high set of coefficients is used. The coefficients are plotted in Figure 5.9.

JIB									
kpj	0.016								
$\beta$	7	15	20	27	50	60	100	150	180
cdjnb- $CD_{low}$	0.05000	0.03200	0.03100	0.03700	0.25000	0.35000	0.73000	0.95000	0.90000
cljnb- $CL_{low}$	0.00000	1.00000	1.37500	1.45000	1.45000	1.25000	0.40000	0.00000	-0.10000
cdjyb- $CD_{hi}$	0.05000	0.03200	0.03100	0.03700	0.25000	0.35000	0.73000	0.95000	0.90000
cljyb- $CL_{hi}$	0.00000	1.10000	1.47500	1.50000	1.45000	1.25000	0.40000	0.00000	-0.10000

TABLE 5.4: Genoa Force Coefficients

There is no difference in the coefficients for jibs and genoa with or without battens.

Headsail Coefficients				
BACKSTAY	FORESTAY			
	fixed	adj fwd	adj aft	adj aft&fwd
None	L	H	error (M)	error (H)
Backstay only	L	H	M	H
Running Backstay only	warning (H)	warning (H)	H	H
2 or more Backstays	H	H	H	H

$L = C_{low}$   
 $M = C_{moderate} = C_{low} \cdot \text{Coeff} + C_{high} \cdot (1 - \text{Coeff})$   
 $H = C_{high}$

TABLE 5.5: Application of Alternative sets for jibs

Table 4 shows the matrix of rated rigging arrangements and corresponding jib/genoa sail force coefficient sets.

L = Low Lift associated with a non adjustable forestay which does not allow genoa camber to be controlled.


H = High Lift associated with increased forestay control.

In case of a backstay being fitted but no running backstays, a medium level set of coefficients is calculated similar to the procedure applied for the mainsail. The intermediate coefficients are derived with the same fractionality coefficient  $f_{Coef}$  given above by using the following formula:

$$C_{medium} = C_{low} \cdot f_{coef} + C_{high} \cdot (1 - f_{coef}) \quad (5.9)$$

## ROLLER FURLING GENOA

For a roller furling genoa the lift coefficient is reduced by the following amount at each apparent wind angle. The modified coefficients are applied only if the genoa has an  $LP > 110\%$  of  $J$ , and there is only one headsail carried onboard.

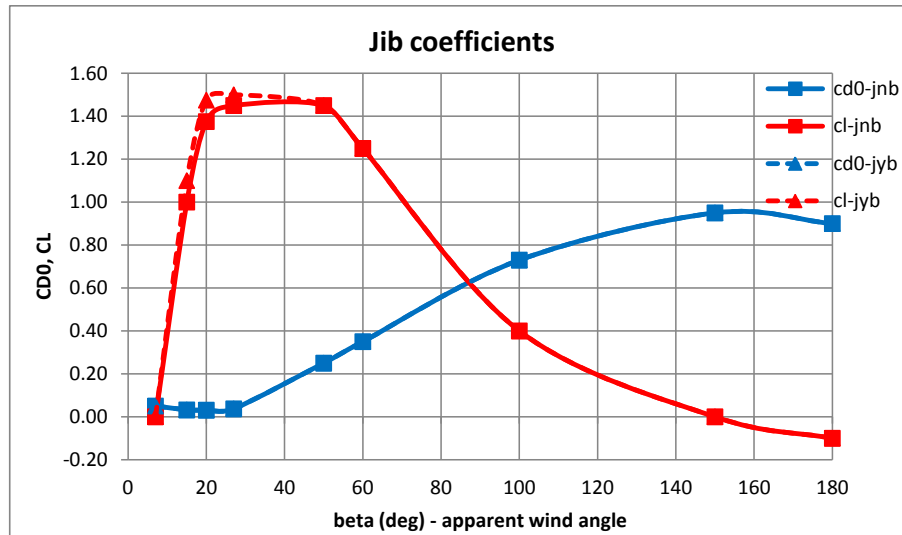FIGURE 5.9: *Alternative Jib Force Coefficient*

AWA	7.0	15.0	20.0	27.0	50.0	60.0	100.0	150.0	180.0
Delta Cl	0.0	0.10	0.10	0.05	0.00	0.00	0.0	0.0	0.0

### LOW TECHNOLOGY SAIL CLOTH

As for the mainsail, also for the jib a credit for carrying only jibs made by low technology material is available. Its value has been reduced in 2016 to 33% of 2015, and it's equal to 33% of the Roller furling jib credit of par.(5.2.2).

### POLED OUT JIB

In 2011 the poled out jib coefficients were removed. For non-spinnaker handicaps on downwind courses the sail coefficients are taken as those for an asymmetric spinnaker set on a pole with a spinnaker sail area equal to 1.064 times the area of the largest rated headsail carried onboard.

### JIB WITH WHISKER POLE

In 2022 the whisker pole effect on a jib has been modelled: when a boat makes use of the whisker pole (which has to be declared), the reaching performances with jib are computed using the aerodynamic coefficients equal to those of an headsail set flying of size equal to the maximum jib.

### NO SPINNAKER CONFIGURATION

For the “No Spinnaker” configuration the yacht is run through the VPP with the normal jib force coefficients. Also a sail set called “jib downwind” between True Wind Angles of 60° and 180° using the asymmetric on centerline coefficients and a sail area equal to 1.064 times the jib area. For handicapping the best speed from each of the polar curves is selected.

### JIB CENTRE OF EFFORT (CE) CALCULATION

The jib centre of effort is calculated as the centroid of area of the projected trapezoid areas, plus the triangular portion below the *LPG*.

$$CEH = \frac{\sum_i A_i \cdot zc_i}{\sum_i A_i} \quad (5.10)$$

### 5.2.3 SPINNAKERS

The following configurations can be handicapped:

1. No spinnaker
2. Symmetric spinnaker on pole only
3. Asymmetric spinnaker tacked on CL
4. Asymmetric spinnaker on pole , asymmetric on CL and symmetric on pole

#### SPINNAKER AREA

The VPP and the sail areas published on the certificate are now actual sailcloth areas<sup>8</sup>. The concept of a “rated sail area” that reflects different types of sail plan has been replaced by more sophisticated force coefficient sets.

$$Spinnaker\_area = \frac{SL \cdot (SFL + 4 \cdot SHW)}{6} \quad (5.11)$$

For asymmetric spinnakers and code zero's,  $SL = (SLU + SLE)/2$ .

A default spinnaker area is calculated. From 2011 onwards if the measured area is less than the default area the default spinnaker area is used in the VPP calculation. Default (minimum) values for symmetric spinnakers:

$$SL_{default} = 0.95 \cdot \sqrt{ISP^2 + J^2} \quad (5.12)$$

$$SFL_{default} = 1.8 \cdot \max(SPL, J) \quad (5.13)$$

$$SHW_{default} = 0.75 \cdot SFL_{default} \quad (5.14)$$

If  $SPL$  is not recorded it will be set  $SPL = J$

For the asymmetric spinnaker:

$$SL_{default} = 0.95 \cdot \sqrt{ISP^2 + J^2} \quad (5.15)$$

$$SFL_{default} = \max(1.8 \cdot SPL, 1.8 \cdot J, 1.6 \cdot TPS) \quad (5.16)$$

$$SHW_{default} = 0.75 \cdot SFL_{default} \quad (5.17)$$

In the case that the configuration is only asymmetric on CL and  $TPS$  is not recorded it will be set  $TPS = J + SFJ$ .

If there is no spinnaker aboard the boat will be rated as explained above in 5.2.2.

#### FORCE COEFFICIENTS (2011, 2016, 2022)

kpsc	0.02639											
$\beta$	28	41	50	60	67	75	100	115	130	150	170	180
cdss1	0.18194	0.26744	0.33721	0.41724	0.46512	0.50616	0.58824	0.61500	0.63600	0.65000	0.65000	0.63954
clss1	-0.02360	0.65965	0.86143	0.99180	1.02600	1.02600	0.92000	0.80500	0.63500	0.36000	0.11000	0.00000

TABLE 5.6: Symmetric Spinnaker Force Coefficients

kpsc	0.02648											
$\beta$	28	41	50	60	67	75	100	115	130	150	170	180
cdasc1	0.15405	0.23925	0.30877	0.38852	0.43624	0.47713	0.54530	0.56574	0.47500	0.35200	0.29000	0.26200
clasc1	0.01738	0.69825	0.89933	1.04000	1.07200	1.07500	0.98500	0.80500	0.37200	0.10000	0.02000	0.00000

TABLE 5.7: Asymmetric Spinnaker tacked on centreline Force Coefficients

The Spinnaker Coefficients are plotted in Figure 5.10.

<sup>8</sup>2008 change

k <sub>sp</sub>	0.02648											
$\beta$	28	41	50	60	67	75	100	115	130	150	170	180
cd <sub>asp1</sub>	0.15405	0.23925	0.30877	0.38852	0.43624	0.47713	0.54530	0.58500	0.62000	0.65000	0.65000	0.63954
cl <sub>asp1</sub>	0.01738	0.69825	0.89933	1.04000	1.07200	1.07500	0.98500	0.84000	0.64700	0.36000	0.11000	0.00000

TABLE 5.8: Asymmetric Spinnaker tacked on a pole Force Coefficients

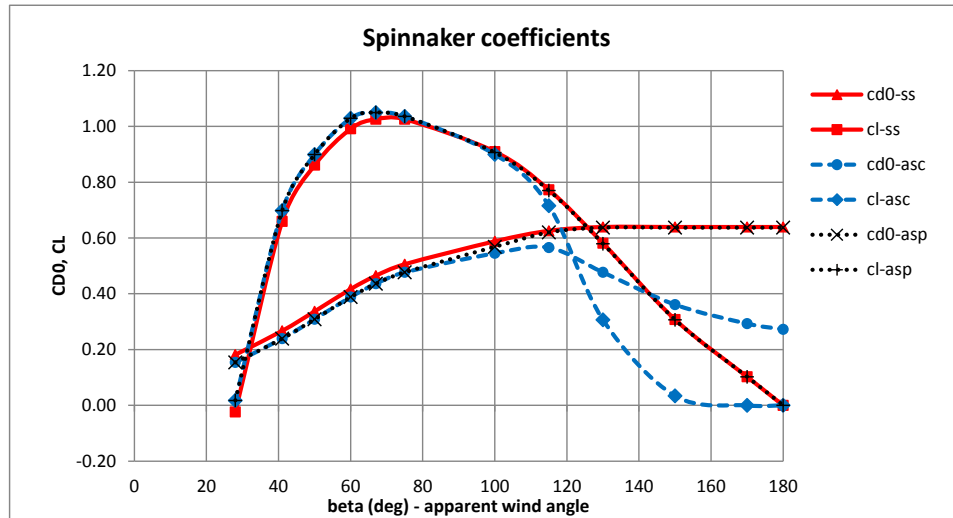


FIGURE 5.10: Spinnaker and Code zero Coefficients

#### REDUCTION IN DRIVE FORCE FROM LARGE SPINNAKERS IN LIGHT AIRS (SHAPE FUNCTION)

The SHAPE function<sup>9</sup> was introduced some years ago as it is an observed effect that large spinnakers are particularly inefficient in light airs. To address this “type-forming” towards smaller spinnakers, a power loss factor for larger sails was developed so reducing the effective area of a spinnaker that is bigger than the “reference area”. The current formulation was adopted in 2012 and it considers the space available for the spinnaker to be flown in, defined by ISPC, J and pole type.

Features of the shape function:

- The reference area depends on whether a pole or a bowsprit configuration is used, due to the different space available in each case;
- The shape function reference area has a *head angle* relationship as well as being related to ISP and TPS in order to bring in the effect of gravity making it harder to fly a lower aspect ratio sail;
- The shape function relates to apparent wind speed rather than true;
- The ISP used by the reference area is the full ISP for pole boats at  $AWA < 80^\circ$ , blending to ISPC at  $AWA > 90^\circ$ , in order to simulate the practice of tacking very light wind sails onto a short bowsprit length to gain more projected area. ISP for sprit boats is the full ISP throughout the range of AWA.

<sup>9</sup>2011 & 2012

This is the SHAPE function formulation:

$$\begin{aligned} SHAPE &= 1 + Wind\_Speed\_Range\_Multiplier * (Shape\_factor - 1) \\ Wind\_Speed\_range\_Multiplier &= 1 \text{ if } AWS < 5, \quad 0 \text{ if } AWS > 6 \\ &\quad (\text{the } Multiplier = 1 \text{ for } AWS < 5, \quad 0 \text{ for } AWS > 6, \quad \text{and interpolates between}) \end{aligned} \quad (5.18)$$

$$\begin{aligned} Shape\_factor &= 1 - 3 \cdot (Ref\_Area / Area\_actual - 1)^2 \quad \text{with } 0.8 < Shape\_factor < 1.0 \\ Area\_actual &= \max(SPI\_AREA, Ref\_Area) \\ Ref\_Area &= 1.04625 \cdot ISPC \cdot SPLc / Head\_Angle\_Corrector \\ Head\_Angle\_Corrector &= \arctan(2.5 \cdot (SPL; TPS) / ISPC) \\ ISPC &= ISP(\text{ for sprit }) \text{ or } ISP - 0.16 \cdot LSM1(\text{ for poles }) \end{aligned} \quad (5.19)$$

$$(5.20)$$

The formulation ensures that the “rated area” increases slightly with the increase of TPS, even in 5 kts AWS, and the reference area is more appropriate to a small sail for the limited space and AWA. Being related to AWS, it is physically realistic and should mean that for a light boat the effect disappears at about 10kts TWS, while for a 37’ heavy cruiser-racer the effect tapers down at 12 kts TWS with the transition represented in Figure 5.11. For spinnaker area below default area, no further reductions will be made, while the maximum reduction will be limited to 75% of measured area.

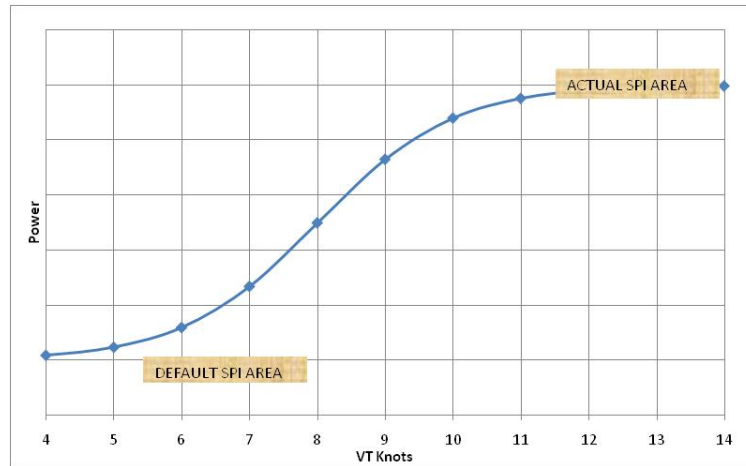


FIGURE 5.11: Large Spinnakers Force Correction in light winds

#### SPINNAKER CENTRE OF EFFORT HEIGHT

The centre of effort height is  $0.565 \cdot ISP$  above the base of  $I$ .

#### SPINNAKER JIB CROSSOVER (2011, 2016)

The 2011 and 2016 modifications to the spinnaker coefficients were largely driven by the desire to “force” the VPP to adopt crossover points from spinnaker to jib at apparent wind angles that more closely reflect the angles observed whilst sailing.

Moreover, in 2014 the maximum heel angle allowed under spinnaker was reduced from about 26.5 to about 21.5 degrees. Numbers are approximated because when approaching the limit value a ‘soft’ boundary is modeled in terms of a rapidly increasing resistance. The minimum REEF factor allowed was fixed at:  $0.85 \cdot Spin\_Area / Default\_Spin\_Area$ .

#### 5.2.4 SPINNAKER TACK POSITION *Power* FUNCTION

In order to more equitably handicap the influence of increasing the length of the spinnaker pole or bowsprit relative to the spinnaker, gennaker and Code zero mid-girth a *power* function was introduced to the mainsail blanketing algorithm as shown in the equation below.



The power calculation is triggered by the value of the term  $f_{sp}$ . If this is less than 0.0 then the spinnaker pole is considered longer than the norm and the power function increases above 1.0.

The Power Function since 2013 has an apparent wind angle linkage, so that the effective reference area is essentially similar to what would be ideal for the wind angle considered. This addresses several handicapping issues: deep running symmetrical sails on heavy boats now need to be bigger relative to the space available than asymmetrical sails on lighter boats that sail higher angles in order to collect the same Power Function credits.

First, bowsprits are considered shorter than poles (a reduction factor of 0.9 is applied to TPS) while a correction of height available is taken into account for poles as  $0.16 \cdot LSM1$ , considering that poles are set higher than the bowsprit.

The power formulation<sup>10</sup> is:

$$\begin{aligned}
 Power &= 1.00 + |f_{sp}|^{1.5}, \quad \text{but not to exceed } 1.28 \\
 f_{sp} &= \min((1 - 1.488 \cdot SPLc / (SPI\_AREA / (ISPc \cdot AWAct))) - 0.17, 0) \\
 SPLc &= SPL \quad \text{or} \quad 0.9 \cdot TPS \\
 ISPc &= ISP \text{ (for sprit) or } ISP - 0.16 \cdot LSM1 \text{ (for poles)} \\
 AWAct &= 0.5196 \cdot AWA^{0.1274} \quad \text{if } AWA > 28^\circ, \quad 0.794 \quad \text{if } AWA < 28^\circ \\
 CE\_height &= 0.517 \cdot ISPc + 0.16 \cdot LSM1 \text{ for poles or } 0.517 \cdot ISPc \text{ for sprits}
 \end{aligned} \tag{5.21}$$

In 2014 power function was fine tuned: the upper last 5% of mast height is for free in ISP for the sake of power function calculation:  $ISPc = \min(ISPc, 0.95 \cdot (P + BAS))$ .

The  $f_{sp}$  formulation includes ISP and TPS, so in effect it has dimensions of an area. The AWA factor is a modification on this area to consider a boat type that needs to sail at 175 degrees and can fill the available space with a larger spinnaker more effectively than a boat that needs to sail at 100 degrees that would not benefit from such a large spinnaker. So if a typical A1 area is set at a typical A1 angle, it should reach a similar power factor to a typical S4 or A4 area set at their typically-wider angles. The “Power” function does not credit poles or bowsprits shorter than the norm, and the maximum power increment is 20% above the base level.

In order to calculate the force from the spinnaker/gennaker the sail area is multiplied by the Power function.

### 5.2.5 HEADSAILS SET FLYING

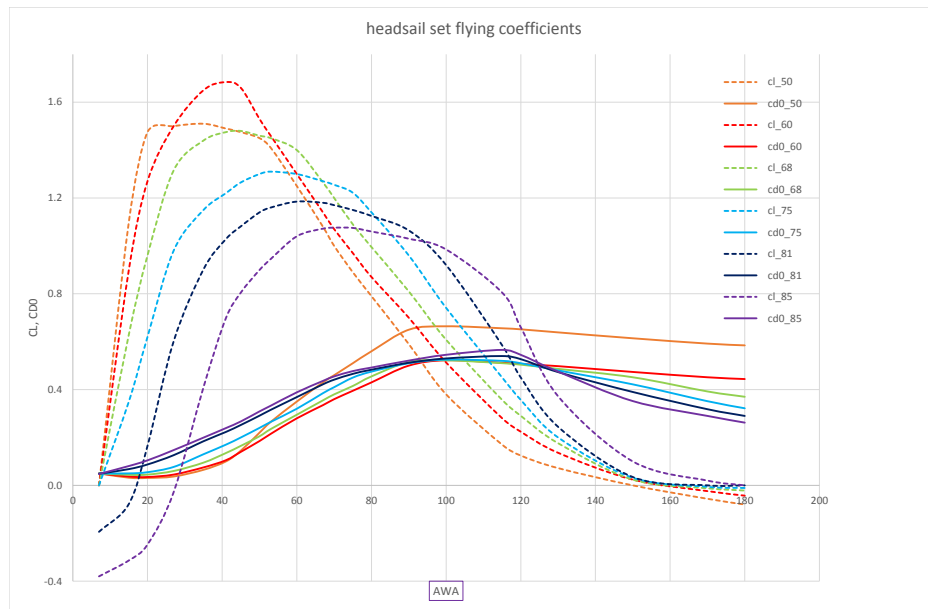


FIGURE 5.12: Aero coefficients of flying headsail

Since 2014 the former code0 has been renamed as *headsail set flying*, and some modifications have been introduced to the rules, affecting the way its area is computed, and its performances. The flying headsail area is now measured similarly to the jib and genoa (which are headsails too, but not set flying). In 2020 the concept of headsail set flying

<sup>10</sup>2013

has been further refined and modified, with important changes in the approach. The reason for changing approach was the advent of cableless sails, which made useless the test for identifying a loose-luffed or a tight luff sails. In 2022 the aerodynamic coefficients have been slightly adjusted.

Regarding the aerodynamic coefficients, it has been acknowledged that there is a big variety of flying headsails: they could be conceived for close reaching and upwind sailing similarly to a genoa or jib, or they can be designed to give their maximum performance at wider angles. The driver of the sail performances with wind angle has been identified in the ratio of the half width to the LP width,  $HHW/HLP$ . Therefore, a matrix of aerodynamic coefficients  $CL$ ,  $CD$  has been developed for six different ratios  $HHW/HLP$ , ranging from the jib at 50% up to the spinnaker at 85%. Moreover, there is a smooth transition in the remaining aerodynamic variables, like  $CEH$  and effective height, from a treatment that is equal to that of a jib for sails with 50% of ratio, to one that is equal to a spinnaker for sails with ratio equal to 85%. For a specific sail, the set of coefficients is selected by interrogating the above matrix, and finding the correct set by interpolation whenever the ratio  $HHW/HLP$  does not coincide with one of the six.

For the above reasons, being each flying headsail different, there is a VPP run for each one of these, contrary to the approach used for jibs and spinnakers, where only the largest of each type is used. Moreover, with every sail run, very little depowering is allowed, with a minimum *reef* equal to 0.91.

Another feature to be noted is that the set of coefficients is defined for ratios  $HHW/HLP$  up to 85%. This is already in the spinnaker region. When an spinnaker has a ratio  $SHW/SFL$  smaller than 85%, beside the usual run with the spinnaker coefficients, also a run with the headsail set flying coefficients is performed. The transformation from  $SHW/SFL$  ratio to  $HHW/HLP$  is carried using the position  $HHW/HLP = SHW/SFL$ . Such approach ensures that there is no jump in performances between a sail declared as a spinnaker with  $SHW/SFL = 0.751$  and the same sail declared as an headsail set flying with  $HHW/HLP = 0.749$ .

## AERO COEFFICIENTS

AWA	cl_50	cd0_50	cl_60	cd0_60	cl_68	cd0_68	cl_75	cd0_75	cl_81	cd0_81	cl_85	cd0_85	kcl	kcd
7	0.0000	0.0500	0.0000	0.0500	0.0000	0.0498	0.0000	0.0498	-0.1940	0.0485	-0.3800	0.0475	1.000	0.830
15	1.1000	0.0320	0.9000	0.0370	0.6300	0.0440	0.3500	0.0500	-0.0776	0.0679	-0.3135	0.0808	1.028	0.830
20	1.4750	0.0310	1.2700	0.0350	0.9600	0.0450	0.6200	0.0550	0.1649	0.0873	-0.2470	0.1045	1.040	0.830
27	1.5000	0.0370	1.5000	0.0450	1.3150	0.0600	0.9800	0.0770	0.6014	0.1261	-0.0285	0.1473	1.055	0.830
35	1.5100	0.0650	1.6500	0.0750	1.4400	0.0950	1.1500	0.1300	0.9021	0.1843	0.4100	0.1995	1.060	0.830
41	1.4900	0.1000	1.6840	0.1050	1.4750	0.1350	1.2200	0.1700	1.0282	0.2231	0.6983	0.2392	1.060	0.880
45	1.4750	0.1450	1.6600	0.1400	1.4800	0.1650	1.2650	0.2000	1.0816	0.2522	0.8050	0.2670	1.058	0.880
50	1.4500	0.2200	1.5300	0.1850	1.4600	0.2050	1.3000	0.2400	1.1400	0.2910	0.8993	0.3088	1.056	0.880
53	1.4100	0.2650	1.4600	0.2150	1.4500	0.2350	1.3100	0.2650	1.1600	0.3153	0.9450	0.3325	1.055	0.880
60	1.2500	0.3500	1.3000	0.2800	1.4000	0.2950	1.3000	0.3200	1.1850	0.3686	1.0400	0.3885	1.055	0.930
67	1.0800	0.4300	1.1400	0.3350	1.2650	0.3550	1.2700	0.3850	1.1800	0.4220	1.0720	0.4362	1.055	0.970
70	1.0000	0.4600	1.0700	0.3600	1.2000	0.3800	1.2550	0.4100	1.1700	0.4414	1.0760	0.4550	1.055	0.980
75	0.8900	0.5100	0.9700	0.3950	1.0900	0.4150	1.2220	0.4500	1.1500	0.4656	1.0750	0.4771	1.052	0.990
80	0.7900	0.5600	0.8700	0.4300	0.9950	0.4550	1.1400	0.4750	1.1250	0.4830	1.0600	0.4920	1.049	0.994
90	0.5900	0.6500	0.7000	0.5000	0.8100	0.5150	0.9600	0.5100	1.0645	0.5120	1.0300	0.5210	1.040	0.998
100	0.3800	0.6643	0.5130	0.5223	0.6080	0.5223	0.7410	0.5250	0.9200	0.5300	0.9850	0.5453	1.033	1.000
115	0.1700	0.6560	0.2805	0.5120	0.3570	0.5103	0.4505	0.5200	0.5850	0.5400	0.8050	0.5657	1.027	1.000
120	0.1245	0.6516	0.2241	0.5070	0.2905	0.5040	0.3569	0.5100	0.4502	0.5270	0.6600	0.5450	1.025	1.000
130	0.0720	0.6388	0.1360	0.4978	0.1760	0.4864	0.2000	0.4800	0.2444	0.4730	0.3720	0.4750	1.015	1.000
150	0.0000	0.6142	0.0240	0.4736	0.0240	0.4514	0.0320	0.4218	0.0349	0.3900	0.1000	0.3520	1.000	1.000
170	-0.0560	0.5920	-0.0240	0.4514	-0.0120	0.3922	-0.0060	0.3515	0.0000	0.3180	0.0200	0.2900	1.000	1.000
180	-0.0800	0.5846	-0.0429	0.4440	-0.0216	0.3700	-0.0108	0.3219	0.0000	0.2900	0.0000	0.2620	1.000	1.000

TABLE 5.9: Aero coefficients of flying headsails. The names carry a number corresponding to the  $HHW/HLP$  ratio. The two rightmost columns are the multipliers of  $CL$  and  $CD$  for battened sail

## AREA CALCULATION AND LEGACY CONVERSION

The area formula for flying headsail is the same as for jibs/genoa (now all called headsails):

$$Area = 0.1125 \cdot HLU(1.4444444HLP + 2HQQW + 2HHW + 1.5HTW + HUW + 0.5HHB) \quad (5.22)$$

The old code0s area was based on spinnaker formula:

$$Area_{old} = \frac{0.5(SLU + SLE)(SFL + 4SHW)}{6} \quad (5.23)$$

During the transition 2013-2014 for legacy code0s a conversion formula that preserves  $HHW/HLP = SHW/SFL$  has been adopted. This formulation derives some virtual girths, based on the old spinnaker-like measures  $SHW$ ,

*SFL*, *SLU*, and *SLE*. Moreover, a factor is applied to the old area calculation, in order to reproduce the same performances with the new approach.

#### TRANSITION 2013-2014 formulas

$$\begin{aligned}
 Area &= 0.94 * A_{old} \\
 MFR &= SHW/SFL \\
 HLU &= SLU \\
 HHW &= MFR * HLP \\
 HHB &= 0.05 * HLP \\
 HUW &= 0.25 * HHW + 0.75 * HHB \\
 HTW &= 0.5 * (HHB + HHW) \\
 HQW &= 0.5 * (HLP + HHW) \\
 &\text{with above relations it results, after simplifications:} \\
 HLP &= Area / [0.1125 * HLU * (2.544444 + 4 * MFR)]
 \end{aligned}$$

#### DEFAULT AREA

The headsail set flying has a default area defined as the area of the foretriangle defined by *TPS* and *ISP*:

$$area_{default} = \frac{ISP_n}{6} \cdot \left( 4 \cdot TPS_n \cdot \frac{SHW}{SFL} + TPS_n \right) \quad (5.24)$$

A flying headsail is not taken into account by the VPP if it is declared to be flown internal to the forestay.

### 5.3 WINDAGE FORCES

The windage drag is incorporated into the force balance by adding to the aerodynamic drag a windage drag determined from equation 5.25. Each of the (*n*) windage elements is ascribed its own dynamic head (*q<sub>n</sub>*) based on an apparent wind velocity appropriate to its centre of effort height (*ZCE*), reference area (*A<sub>ref</sub>*) and drag coefficient (*Cd*).

$$D_{WINDAGE} = \sum_1^n q_n \cdot A_{ref} \cdot Cd_n \quad (5.25)$$

The windage drag for each element is calculated at apparent wind angles of 0 and 90 degrees, while at intermediate angles the drag coefficient is calculated as

$$Cd = [Cd_{front} \cdot A_{front} \cdot \cos \beta \operatorname{sgn}(90 - \beta) + Cd_{side} \cdot A_{side} \cdot \sin \beta] / A_{ref} \quad (5.26)$$

$\beta$  being the local apparent wind angle at the center of effort height of the selected windage element. The calculation of Centre of Effort Height (*ZCE*), Drag Coefficient (*Cd0*) and reference area (*A<sub>REF</sub>*) at apparent wind angles of 0 and 90 degrees is shown in the table 5.10 below, the values for 180 degrees are the same as those for the headwind case. In table 5.10 *rfm* is the amount of mainsail reefing (see sec.5.1.3), while *ehm* is the static effective height, calculated as  $ehm = \max(P \cdot tf + BAS, I, ISP)$ , where  $tf = 0.16Z_m/P + 0.94$ , *Z<sub>m</sub>* being the vertical distance of the centroid of mainsail area measured from the boom.

The hull side area (*HSA<sub>0</sub>*), at zero heel is:

$$HSA_0 = \int_0^n Freeboard \, dl = fb \cdot LOA \quad (5.27)$$

where *n* = number of measurement stations, and *fb* is the average freeboard with boat upright,  $fb = 1/LOA \int_0^L freeboard \, dl$ .

In 2017 the calculation of the heeled hull side area has been refined: the old formulation took into account an increase due to heel based on a simple  $\sin \phi$  formula:

$$HSA_\phi = HSA_0 + 0.75 \cdot IMSB/2 \cdot \sin \phi \cdot LOA \quad (5.28)$$

The new formulation is

$$HSA_\phi = fb_\phi \cdot LOA \quad (5.29)$$

	Apparent. Wind Angle 0°		
WINDAGE ELEMENT	ZCE	$C_d$	$A_{REF}$
HULL	$0.66(\text{FBAV} + B \sin \phi)$	0.816	$\text{FBAV} \cdot B$
MAST-Sail	$\text{HBI} + \text{EHM} \cdot \text{rfm}/2$	0.4a	Front Area
MAST-Bare	$\text{HBI} + \text{EHM} \cdot (1 - \text{rfm})/2$	0.8a	Front Area
RIGGING	$\text{HBI} + I/2$	1.0b	$I \cdot f(\text{Default Rigging wt.})$
Non round rigging <sup>11</sup>	$\text{HBI} + I/2$	0.25b	$I \cdot f(\text{Default Rigging wt.})$
CREW	$\text{HBI} + 0.5 + B/2 \sin \phi$	1.08	0.25
	Apparent. Wind Angle 90°		
WINDAGE ELEMENT	ZCE	$C_d$	$A_{REF}$
HULL	$0.66(\text{FBAV} + B \sin \phi)$	0.816	$f(\text{HSA}_0, \phi)$
MAST-Sail	$\text{HBI} + \text{EHM} \cdot \text{rfm}/2$	0.6a	Side Area
MAST-Bare	$\text{HBI} + \text{EHM} \cdot (1 - \text{rfm})/2$	0.8a	Side Area
RIGGING	$\text{HBI} + I/2$	1.0b	$I \cdot f(\text{Default Rigging wt.})$
CREW	$\text{HBI} + 0.5 + B/2 \sin \phi$	1.08	$0.5 \cdot \text{Mvblcrew}$
a modified by EDM factor for non standard mast section aspect ratio.			
b plus spreader factor = 0.2			

TABLE 5.10: Windage force model

where  $fb_\phi$  is the calculated average freeboard when the boat is heeled at angle  $\phi$ . This formulation leads to more precise results in particular for light and wide yachts, where the old formulation underestimated the heeled hull windage area.

Regarding the mast windage, there is a limit in the mast longitudinal diameter:

$$MDL_{max} = 0.036 \cdot \left( IG \cdot \frac{RM@25}{25} \right)^{0.25} \quad (5.30)$$

when the limit is exceeded, the excess is added to the mainsail girths and headboard.

Concerning the windage of the crew, since 2019 it is computed basing the drag on the *default* crew weight, and no more on the *declared* crew weight.

### 5.3.1 RIGGING

The drag of the rigging wire is calculated based on the default rigging weight. The square root converts wire cross-sectional area to wire diameter, and the factor of 2 means four stays.

$$\text{Diameter\_of\_Rigging\_wire} = 2\sqrt{(4 \cdot \text{WT\_Default}/I/\text{Steel\_density}/\pi)} \quad (5.31)$$

$$\text{Area\_Rigging\_Wire\_windage} = I \cdot \text{Diameter\_of\_Rigging\_wire} \quad (5.32)$$

$$Cd0\_Rigging\_wire = Cd\_Rigging\_Wire \cdot (1 + \text{spreader\_Factor\_windage}) \quad (5.33)$$

### SPREADERS

If the rig has bona-fide spreaders their drag is added in as a multiplier as shown in equation 5.33, where *spreader\_Factor\_windage* is set to 0.2.

## 5.4 TOTAL AERODYNAMIC LIFT AND DRAG

The next phase is to combine the individual sail's characteristics to produce a set of lift and drag coefficients that describe the aerodynamic behavior of the entire rig.

This is accomplished by a weighed superposition of the individual sail force coefficients at each apparent wind angle. This process is described in more detail in section 5.4.1.

The weight given to each sail's coefficients during this process is proportional to the product of its area and the "blanketing" factor, which modifies the individual sails coefficients depending on the apparent wind angle. After summing the weighted coefficients the total is normalized with respect to the reference sail area ( $A_{ref}$ ).

When calculating the collective vertical centre of force the weight given to each sail's contribution is proportional to the product of the area, the blanketing factor, and the total force coefficient.

The induced drag coefficient is calculated from knowledge of the effective rig height.  $heff$

$$CD_I = \frac{CL^2 \cdot A_{ref}}{\pi \cdot heff^2} \quad (5.34)$$

The effective rig height is calculated from the sail plan geometry at each iteration of the VPP through the aerodynamic force calculation loop.

The effective rig height is a function of:

- the mainsail roach
- the relative positions of the mainsail head and the jib head expressed as “fractionality” and
- the overlap of the headsail
- the depowering

#### 5.4.1 LIFT AND DRAG OF COMPLETE SAIL SET

The aggregate maximum lift and linear parasite drag coefficients are the sum of each sail component's contribution normalized by reference area, and modified by a blanketing function  $bk_i$ :

$$CL_{max} = \sum CL_{max_i} \cdot bk_i \cdot \frac{A_i}{A_{ref}} \quad (5.35)$$

$$CD_{0max} = \sum CD_{0max_i} \cdot bk_i \cdot \frac{A_i}{A_{ref}} \quad (5.36)$$

$$(5.37)$$

A typical form of the collective sail force coefficients is shown in Figure 5.13. The “Drag” Curve is the parasitic drag contribution, and the Total Drag curve includes the induced drag contribution.

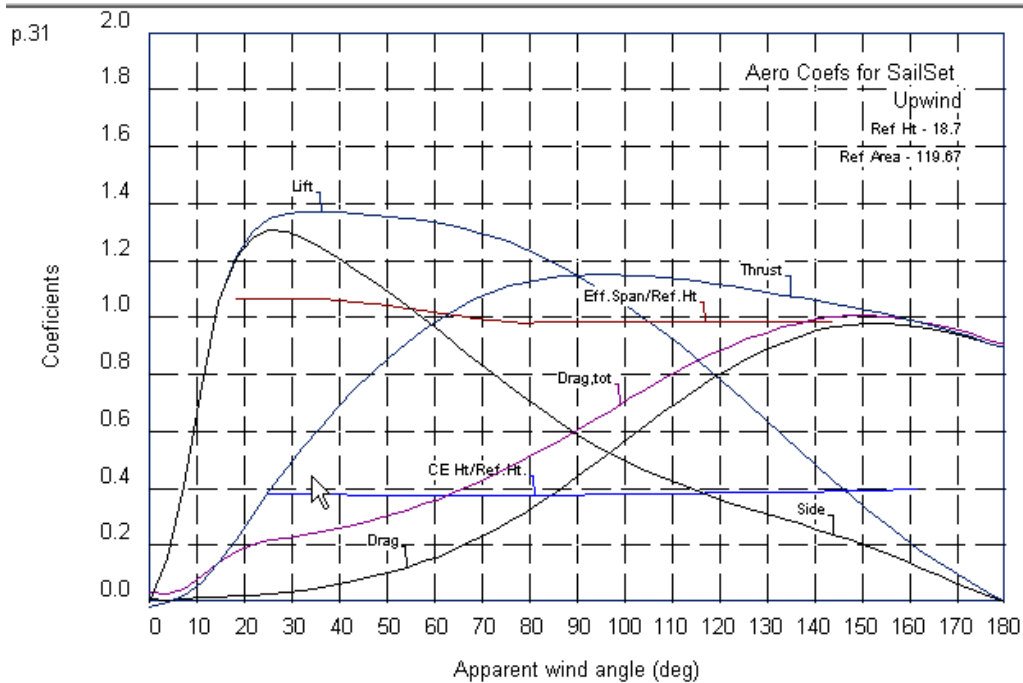


FIGURE 5.13: Typical Form of “Collective” Upwind Sail Force Coefficients

### 5.4.2 CENTER OF EFFORT HEIGHT

Center of effort height  $Z_{ce}$  is evaluated by weighting each sail's individual center of effort height by its area and partial force coefficient (comprised of lift and linear component of parasitic drag):

$$Z_{ce} = \frac{\sum Z_{ce_i} \cdot \sqrt{CL_{max_i}^2 + CD_{0max_i}^2} \cdot bk_i \cdot A_i}{A_{ref} \cdot \sqrt{CL_{max}^2 + CD_{0max}^2}} \quad (5.38)$$

#### JIB TWIST (2012)

The centre of effort height ( $Z_{ce}$ ) of the total sailplan is reduced linearly with the jib foot ( $ftj$ ) parameter:

$$Z_{ce} = Z_{ce}|_{ftj=1} - \text{delta } CEH \quad (5.39)$$

$Z_{ce}$  is lowered when the jib area starts to be reduced ( $ftj = 1$ , or  $REEF = 1$ ), and is lowered to a maximum value of 5% of IG when the jib area is reduced to its minimum value ( $ftj = 0$ , which means  $REEF = 0.5$ ).

$$\text{delta } CEH = (1 - ftj) \cdot 0.05 \cdot IG ; \quad 0 \leq ftj \leq 1 \quad (5.40)$$

It has to be noted that this reduction of center of effort height is different from the one called *twist function* (5.4.4): the former is related to the jib foot reduction, that is incorporated in the  $REEF$  parameter (from 1.0 to 0.5), while the latter is related to the  $FLAT$  parameter.

### 5.4.3 INDUCED DRAG

In order to calculate the induced drag component an efficiency coefficient is derived. The efficiency coefficient is such that when multiplied by the collective lift coefficient squared it yields the collective induced drag of the sails. The efficiency coefficient is comprised of 2 parts;

- The 2 dimensional part describing the increase of viscous drag that occurs as the sail produces more lift,
- and the “induced drag” which depends on the effective rig height.

#### QUADRATIC PARASITE DRAG

The viscous drag of the sails varies according to the square of the lift coefficient. This quadratic parasite drag coefficient  $KPP$  is the sums of the individual sails contributions:

$$KPP = \frac{\sum KPP_i \cdot CL_{max_i}^2 \cdot bk_i \cdot A_i}{A_{ref} \cdot CL_{max}^2} \quad (5.41)$$

#### EFFECTIVE RIG HEIGHT

Three parameters - *fractionality*, *overlap* and *roach*- are determined in order to calculate the Effective rig height which determines the induced drag of the sails.

$$\begin{aligned} \text{Fractionality} &= I_{current} / (P_{current} + BAS) \\ \text{Overlap} &= LPG_{current} / J \\ \text{Roach} &= \text{see eq. (5.3)} \end{aligned}$$

The influence of sail plan geometry is first calculated to derive a corrected effective span coefficient.

$$\text{eff\_span\_corr} = 1.1 + 0.08 \cdot (Roach - 0.2) + 0.5 \cdot (0.68 + 0.31 \cdot \text{fractionality} + 0.075 \cdot \text{overlap} - 1.1) \quad (5.42)$$

The effective span coefficient is approximately 1.10 with a masthead rig ( $\text{fractionality} = 1.0$ ), 150% overlap genoa and a roach of 0.2.

The effective span coefficient is then further modified to reflect the fact that as the sails are eased at wider apparent wind angles the effective span is reduced as the sealing of the jib and the hull is lost and the sail interactions become less favourable. With jib we have:

$$\text{cheff}_{upwind} = \text{eff\_span\_corr} \cdot k_{heff} \quad (5.43)$$

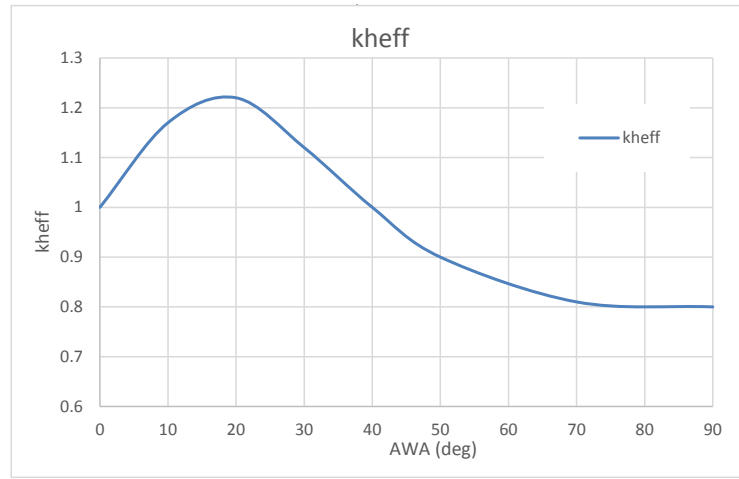


FIGURE 5.14: Variation of Effective Span Factor with Apparent wind angle

The term  $kheff$  varies from 1.22 at 20 degrees to 0.80 as the apparent wind angle widens from 20 to 80 degrees (Figure 5.14):

With spinnaker the effective height calculation is simpler, being independent of the apparent wind angle and on the foresail geometry:

$$cheff_{downwind} = \frac{1}{b_{max}} heff\_height\_max\_spi \cdot reef \quad (5.44)$$

where

$$\begin{aligned} heff\_height\_max\_spi &= \max(P \cdot tf + BAS + HBI, PY \cdot tfy + HBIY) \\ tf &= \frac{0.16(CEH_{main} - 0.024)}{P} + 0.94 \\ tfy &= \frac{0.16(CEH_{miz} - 0.024)}{PY} + 0.94 \end{aligned}$$

Finally the effective height  $heff$  is calculated from the product of  $cheff$  and the the highest point of the sail plan  $b$  above the water surface. This is either the mainsail head ( $P + BAS$ ) or jib head ( $IG$ ). If the jib head is higher than the mainsail head then the average is taken.

$$heff = cheff \cdot (b + HBI) \quad (5.45)$$

The efficiency coefficient  $CE$  is comprised of the induced drag coefficient and the parasitic drag coefficient that is proportional to lift squared.

$$CE = KPP + \frac{A_{ref}}{\pi \cdot heff^2} \quad (5.46)$$

where the reference area is the total sail area. Finally at each apparent wind angle the total lift and drag coefficient for the sails can be calculated from the lift, and drag coefficients and the “efficiency coefficient” ( $CE$ ).

$$CD_{sailset} = CD0_{max} \cdot [FLAT \cdot f_{cdmult} \cdot f_{cdj} + (1 - f_{cdj})] + CE \cdot CL_{max}^2 \cdot FLAT^2 \cdot f_{cdmult} \quad (5.47)$$

$$CL_{sailset} = FLAT \cdot CL_{max} \quad (5.48)$$

where

$$f_{cdj} = \frac{bk_{jib} \cdot CD0_{maxjib} \cdot A_{jib}}{CD0_{max} \cdot A_{tot}}$$

is the fraction of parasitic drag due to the jib. The FLAT parameter characterizes a reduction in sail camber such that the lift is proportionally reduced from the maximum lift available. Thus flat = 0.9 means 90% of the maximum lift is being used.

What this means in practice is shown in Figure 5.15, in “full power” conditions (FLAT=1) the available aerodynamic force is determined by the maximum  $Cl$  and associated  $Cd$ . The total  $Cd$  at max  $Cl$  is affected by  $Cdp$  and by the effective rig height that determines the induced drag component. When the sails are flattened to reduce the

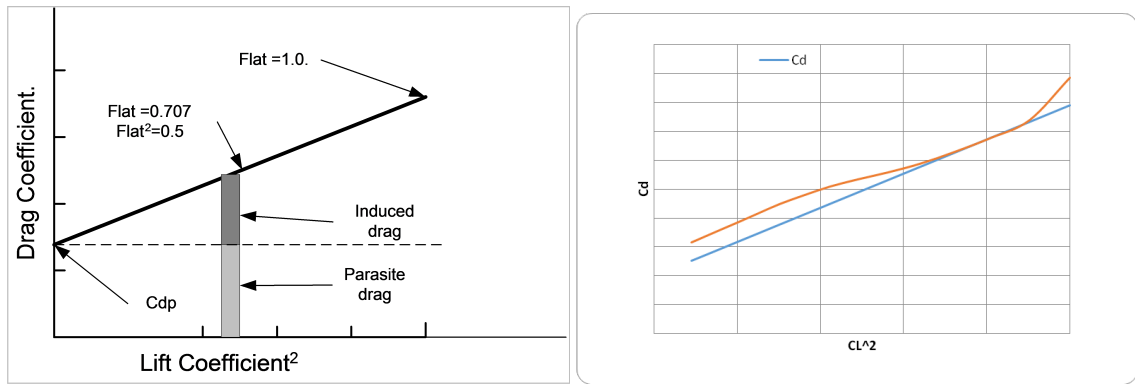


FIGURE 5.15: Variation of Drag Coefficient with Flat parameter (left), modification of the linear depowering scheme,  $f_{cdmult}$ , (right)

total force, and therefore the heeling moment, it does so along the  $Cd$  vs.  $Cl^2$  line shown in Figure 5.15. In 2014, the so called depowering curve,  $Cd$  vs.  $Cl^2$  of the sailplan was modified in order to follow the non linearities found in the wind tunnel (and in the reality!): both at full power and when the sail are well depowered (that is when the flat parameter is below 0.8), an increase of the drag is found compared to the linear behavior (see Figure 5.15, the blue line represents the linear model, red line the modified). For doing this, a multiplier  $f_{cdmult}$  is applied to the drag coefficient of the sailplan, which depends on the position along the depowering curve, in other words on the flat parameter:

Flat	0.10	0.20	0.30	0.40	0.50	0.55	0.60	0.65	0.70	0.75	0.80	0.85	0.90	0.95	1.00
$f_{cdmult}$	1.06	1.06	1.06	1.06	1.06	1.06	1.055	1.048	1.035	1.020	1.008	1.002	1.000	1.004	1.06

Therefore the non linear relation  $Cd - Cl^2$  (red line in figure 5.15, right) is obtained.

#### 5.4.4 TWIST FUNCTION

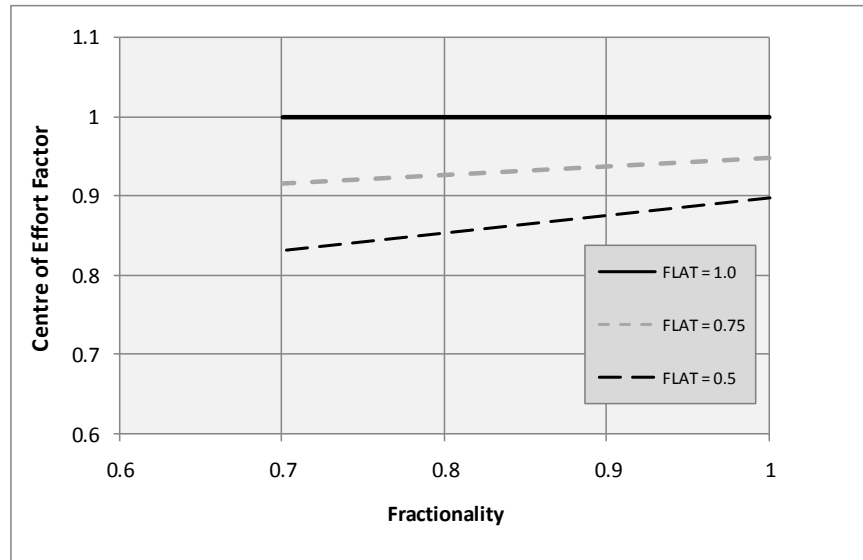


FIGURE 5.16: Twist Function

In order to reflect the fact that as sails are de-powered the centre of effort height moves lower a “twist function” was introduced, relating the center of effort height to the amount of  $FLAT$  used. The extent of the centre of effort lowering was determined from wind tunnel test results, which showed that this effect was proportional to the fractionality  $I/(P + BAS)$  ratio.

$$Z_{CE} = Z_{CE}|_{FLAT=1} \cdot [1 - 0.203 \cdot (1 - flat) - 0.451 \cdot (1 - flat) \cdot (1 - frac)] \quad (5.49)$$



To reflect the ability of fractionally rigged boats to de-power more readily than masthead rigged boats the twist function links the vertical centre of effort position to the flat parameter.

Fractional rigged boats more lowering of the centre of effort position as the FLAT parameter reduces is shown in Figure 5.16.

## 5.5 RESOLUTION OF FORCES

Throughout the evolution of the VPP there has been a constant trend that the VPP appears to overstate the value of high righting moment. This has been particularly noticeable in light airs on windward/leeward courses, i.e. Mediterranean conditions.

Two strategies have been adopted in the aerodynamic force model to overcome this, the *PHI\_UP*, parameter (see below) and the twist function (see par.5.4.4 )

### 5.5.1 *PHI\_UP*

In the VPP as the yacht heels the apparent wind angle seen by the sails reduces, but on the water the crew have traveler and jib lead controls that permit adjustment of angle of attack.

To reflect this the *PHI\_UP* function modifies the heel angle that is used in the calculation of the apparent wind angle at which the collective curves of lift and drag coefficient are evaluated. In 2018 the effect of this function has been detuned, setting the heel angle in the aerodynamic model as the average of the physical angle and the below calculated *phi\_up*.

$$phi\_up = 10 \cdot \left( \frac{\phi}{30} \right)^2 \quad (5.50)$$

$\phi$	<i>phi_up</i>
0	0.0
10	1.1
20	4.4

TABLE 5.11: Calculated *PHI\_UP* values

### 5.5.2 THRUST AND HEELING FORCE

In order to determine the total thrust and heeling moment the aerodynamic forces are resolved into two orthogonal components; along the yachts track (*CR*) and perpendicular to the mast plane (*CH*). The windage forces are then added to these components.

The collective lift and drag forces from aerodynamic model are resolved as follows:

$$CR = CL \sin \beta - CD \cos \beta \quad (5.51)$$

$$CH = CL \cos \beta + CD \sin \beta \quad (5.52)$$

The coefficients are translated into forces:

$$FRA\_B4\_Windage = CR \cdot \frac{1}{2} \rho V_a^2 \cdot A_{ref} \quad (5.53)$$

$$FHA\_B4\_Windage = CH \cdot \frac{1}{2} \rho V_a^2 \cdot A_{ref} \quad (5.54)$$

Where:

$$\begin{aligned} \rho &= \text{air density} \\ V_a &= \text{apparent wind speed} \\ A &= \text{reference sail area} \end{aligned}$$

The total aerodynamic force (*FRA*) and the heeling force (*FHA*) are then calculated by adding the windage components:

$$FRA = FRA\_B4\_Windage + FRA\_hull + FRA\_mast + FRA\_Rigging\_Wire + FRA\_Crew \quad (5.55)$$

$$FHA = FHA\_B4\_Windage + FHA\_hull + FHA\_mast + FHA\_Rigging\_Wire + FHA\_Crew \quad (5.56)$$

### 5.5.3 AERODYNAMIC HEELING MOMENT

The aerodynamic heeling moment is the sum of the sail heeling moment ( $HMA\_B4\_Windage$ ) and the heeling moment from the windage elements.

$$HMA = HMA\_B4\_Windage + HMA\_hull + HMA\_mast + HMA\_Rigging\_Wire + HMA\_Crew \quad (5.57)$$

The sail heeling moment is the product of the heeling force ( $CH$ ) and the moment arm above the waterline.

$$HMA\_B4\_Windage = \frac{1}{2} \rho V_a^2 \cdot A_{REF} \cdot CH \cdot (HBI + ZCE \cdot REEF) \quad (5.58)$$

## 5.6 BLANKETING FUNCTIONS

### 5.6.1 MAINSAIL

$$bk(\beta) = \begin{cases} 1 & \text{if } \beta \leq 90 \\ 1 - 0.5 \cdot f_m \left( 1 - 1.5 \cdot \frac{\beta-135}{45} - 0.5 \cdot \left[ \frac{\beta-135}{45} \right]^3 \right) & \text{if } \beta > 90 \end{cases}$$

where

$$f_m = \frac{1.16 \cdot A_{miz\_staysail}}{A_{main}}$$

Clearly  $f_m = 0$  for sloops or for a boat without a mizzen staysail. The factor 1.16 is a backward compatibility multiplier, that originated when the internal vpp mainsail area was assumed equal to the actual rated area, and no more that same area divided by 1.16 (which was a number probably related to the average roach used many years ago).

### 5.6.2 JIB

$$bk(\beta) = \begin{cases} 1 & \text{if } \beta \leq 135 \\ 1 - f_j \frac{\beta-135}{45} & \text{if } \beta > 135 \end{cases}$$

where

$$f_j = \frac{A_{jib} - \min(A_{jib}, A_{fore})}{A_{jib}}$$

### 5.6.3 MIZZEN, JIB DOWNWIND, SPINNAKER

$$bk(\beta) = 1$$

### 5.6.4 MIZZEN STAYSAIL

$$bk(\beta) = \begin{cases} 1 - f_{ys} \left[ 1 - 1.5 \cdot \frac{\beta-135}{45} - 0.5 \cdot \left( \frac{\beta-135}{45} \right)^3 \right] & \text{if } \beta \geq 90 \\ 1 & \text{if } 90 > \beta \geq 60 \\ 1 - \left[ \left( \frac{60-\beta}{15} \right)^2 \right] & \text{if } 60 > \beta > 45 \\ 1 & \text{if } \beta \leq 45 \end{cases}$$

where

$$f_{ys} = \frac{A_{mizzen}}{1.16 \cdot A_{miz\_staysail}}$$

## 6 HYDRODYNAMIC FORCES

The VPP hydrodynamic force model divides the drag into two sources; viscous or skin friction drag arising from the flow of the water over the immersed surface, and residuary or wave making drag arising from the creation of surface waves.

The VPP can make performance predictions not only for conventional fin keel yachts, but also water ballasted and canting keel yachts that have asymmetric rudder and keel configurations. Whilst the estimate of performance for these yachts is based on plausible physics, there has been a deliberate policy not to reach a situation where these types of yachts are favored.

During 2012 the hydrodynamic resistance formulation underwent a significant revision. This resulted in deriving a new  $R_r$  formulation based only on BTR and LVR using a methodology to assess for each Froude number (Fn) the  $R_r$  variation related to a base boat having  $LVR = BTR = 6$ . The Length model was also modified to more correctly represent a dynamic length.

Also the viscous resistance formulation was modified to more sensibly capture the appropriate reference length of contemporary canoe body shapes.

### 6.1 VISCOUS RESISTANCE

The total frictional resistance is the sum of the appendage and canoe body contribution.

$$D_{FRICITION} = R_{VC} + R_{VA} \quad (6.1)$$

#### 6.1.1 CANOE BODY

The viscous resistance is calculated as<sup>1</sup>:

$$R_{VC} = \frac{1}{2} \cdot \rho V^2 \cdot Area \cdot (C_f \cdot ff) \quad (6.2)$$

where

$$\begin{aligned} ff &= 1.05 \\ C_f &= \frac{0.066}{(\log 10 Re - 2.03)^2} \\ Re &= \frac{0.85V \cdot LSM1}{\nu} \end{aligned}$$

so for 2013 the friction line (Hughes in way of ITTC57), the form factor (1.05, it was 1.00), and the reference length (0.85 $LSM1$  in way of 0.7 $LSM1$ ) were modified.  $\nu$  is the water kinematic viscosity, and  $V$  is the boat velocity.

#### 6.1.2 APPENDAGES

The currently implemented scheme divides each appendage into five segments as shown in Figure 6.1, and determines the viscous coefficient of resistance of each strip based on the local (strip specific) Reynolds Number and thickness/chord ( $t/c$ ) ratio.

The viscous resistance of each strip is then calculated from the product of the dynamic head, the local wetted surface area and an appropriate skin friction resistance coefficient ( $C_f$ ) multiplied by a form factor ( $1 + k_f$ ).

Since 2022 the old tabular interpolation among different coefficients set for only three values of  $tcr$  (0, 0.10, 0.20) is replaced by a continuous function based on thickness to chord ratio  $tcr$ . There is no change to the fundamental approach. There is a cap on the maximum  $tcr$  at 18% to discourage very short and fat profiles.

---

<sup>1</sup>Major change 2013

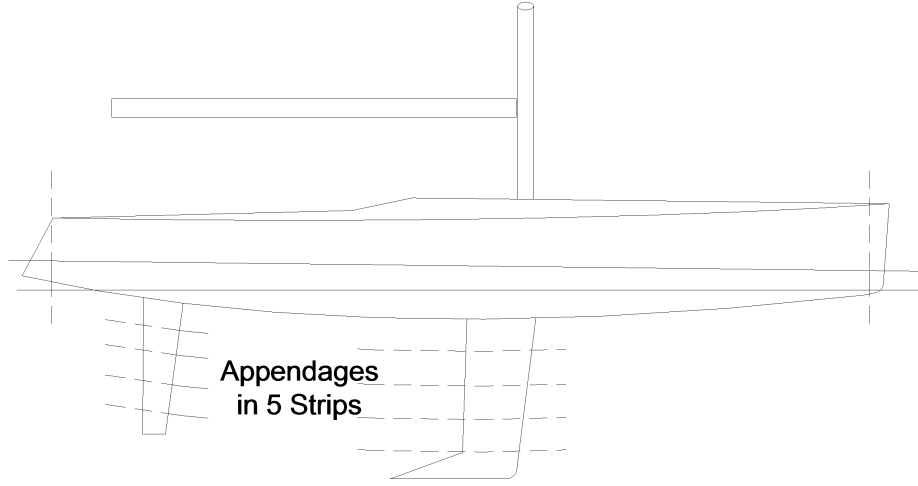


FIGURE 6.1: Stripwise segmentation of appendages

The frictional coefficients formula is

$$c_{f0} = 0.0000853(\log Rn)^4 - 0.0025252(\log Rn)^3 + (0.0278513 \log Rn)^2 - 0.1363492 \log Rn + 0.2539752 \quad (6.3)$$

while the form factor is

$$k_f = 1.75tcr + 30tcr^4 \quad (6.4)$$

The viscous drag is calculated as

$$R_v = c_f \cdot (1 + k_f) \cdot A \cdot 0.5\rho v^2 \quad (6.5)$$

Regarding the bottom strip, if a bulb is found and flagged, the viscous drag is calculated using a different form factor, with a cap of 0.25 on the thickness-chord ratio:

$$k_{fb} = -13.1753tcr^3 + 9.3842tcr^2 - 0.7581tcr + 0.1442 \quad (6.6)$$

The bulb existence is flagged when the first bottom strip is longer more than 20% more than the one just above. In this case, the first strip variables are calculated in a different way, addressing the more three dimensional shape of the bulb compared to a fin keel. For a bulb, the chord is computed as the maximum longitudinal distance between offsets points belonging to the first strip; the max thickness is then computed as  $(1.6 \cdot str\_vol/str\_area)/0.66$ .

In 2020 the effect of the lift on the drag of the appendage has been introduced. In order to take this into account, the effects of the  $CL$  on the  $CD$  were evaluated using as a reference a NACA 64014 foil for a  $Rn$  of 2 million and a  $Ncrit$  value of 1 using Xfoil. The relationship between  $CL$  and  $CD$  is modeled as:

$$CD = Cf + 0.0016 \cdot CL + 0.0032 \cdot CL^2 \quad (6.7)$$

which is based on the results on a NACA 64014 foil, tested with a  $Rn = 2 \cdot 10^6$ , and  $Ncrit = 1$ . The increase of the  $CD$  is capped to that corresponding to a  $CL$  of 0.5. This means that no yacht will see an increase in the calculated keel and rudder viscous resistance greater than about 20%. The keel and rudder  $CL$  values are to be calculated based on the estimated side force load sharing which changes with the heel angle.

The total viscous drag of the appendages is determined as follows:

$$R_{VA} = \frac{1}{2}\rho V^2 \left( \sum_{N=1}^5 [A_{stripN}CD(rudder)_{StripN} + A_{StripN}CD(keel)_{StripN}] \right) + \quad (6.8)$$

$$\frac{1}{2}\rho V^2 (A_{centerboard}CD_{centerboard} + A_{canard}CD_{canard}) \quad (6.9)$$

## DOUBLE RUDDERS (2010)

The Offset file has now been configured to accept double rudder configurations as detailed in Appendix A. The viscous drag is calculated according to Table ??, with no velocity deficit for the keel wake. The immersed wetted area is calculated at each heel angle assuming an undisturbed static waterplane.

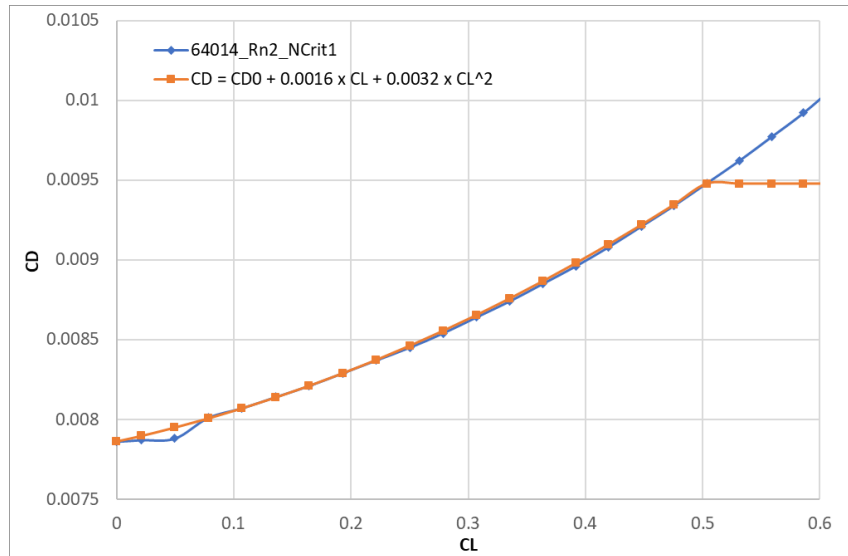


FIGURE 6.2: Increase of appendage drag with lift.

### CENTERBOARDS

Because centerboards are often not as well refined as keel fins a different drag formulation<sup>2</sup> is adopted:

$$Centerboard\_drag = 0.006 \cdot 12\rho V^2 \cdot A_{cb} \quad (6.10)$$

$$Wetted\_Area\_Centerboard(A_{cb}) = 2 \cdot ECM \cdot \frac{CBTC + 2 \cdot CBMC + CBRC}{4} \quad (6.11)$$

where

$\rho$	=	Water density
$ECM$	=	Centerboard extension
$CBTC$	=	Centerboard tip chord
$CBMC$	=	Centerboard mid chord
$CBRC$	=	Centerboard root chord

If there is no data for centerboard chord then the following formula is applied:

$$Wetted\_Area\_Centerboard(A_{cb}) = 2 \cdot 0.6 \cdot ECM^2 \quad (6.12)$$

### DAGGER BOARDS, BILGE BOARDS

Bilge boards and dagger boards are treated as per Table ?? based on their area and mean chord length.

### TRIM TABS

The use of a trim tab to reduce the viscous drag of the keel fin by shifting the viscous “drag bucket” to higher lift coefficient is reflected in a formula that reduces the viscous drag coefficient for a keel with a trim tab<sup>3</sup>.

$$CL = 0.75 \frac{Side\_force}{q \cdot A} \quad (6.13)$$

$$CD = 0.0097 \cdot CL^2 + 0.00029CL + 0.0034 \quad (6.14)$$

$$CD\_diff = 0.33(CD - 0.0034) \quad (6.15)$$

where  $A$  is the keel area and  $q$  is the dynamic head  $0.5\rho V^2$ .  $CD\_diff$  is subtracted from the keel strip friction drag coefficient.

<sup>2</sup>1987

<sup>3</sup>The form of the code reflects that the drag reduction has been reduced over time because the original formulation was regarded as too punitive in terms of handicap


## 6.2 PROPELLER

The drag of the propeller is calculated as follows:

$$D_{prop} = \frac{1}{2} \rho V_s^2 \cdot 0.81 \cdot PIPA \quad (6.16)$$

PIPA is calculated according to the following formulae which depend on the type of installation.

### Out of Aperture -- 605

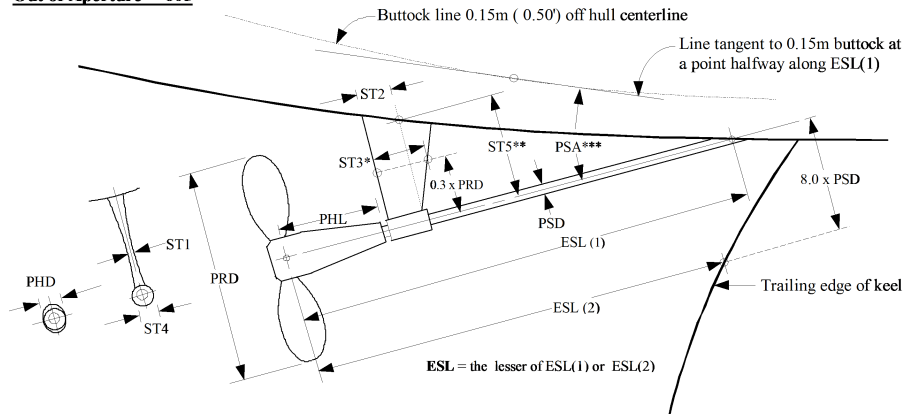

\*ST3 is the maximum strut width measured parallel to the propeller shaft found not more than  $0.3 \times PRD$  above the shaft centerline.


\*\*ST5 is measured perpendicular to the shaft centerline from the hull to the shaft centerline at the forward end of ST2.

\*\*\*PSA (Propeller Shaft Angle) may be measured in two steps:

1. Angle between shaft centerline and level datum line
2. Angle between buttock tangent line and level datum line

Add angles to arrive at PSA.

### In Aperture -- 606



APT and APB are the maximum aperture widths measured parallel to the propeller shaft, found not less than  $PRD/3$  above and below the shaft centerline.

### Strut Drive -- 607

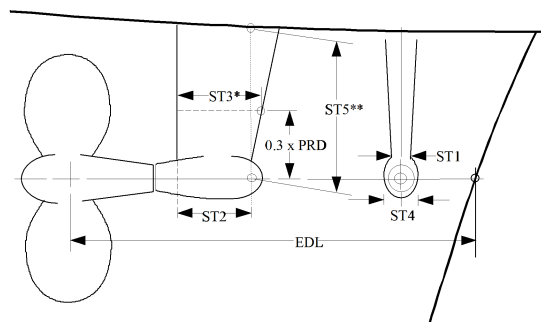


FIGURE 6.3: *Propeller Installation Dimensions*

### 6.2.1 SHAFT INSTALLATION

For all propellers with shaft installation, IPA is calculated as follows:

$$IPA = (0.04 + \sin^3 PSA) \cdot [PSD(ESL - ST2 - PHL) + ST4(ST2 + PHL)] + 0.03ST1 \cdot \left( ST5 - \frac{ST4}{2} \right) \quad (6.17)$$

#### FOLDING AND FEATHERING 2 BLADE

$$PIPA = IPA + 0.65(0.9PHD)^2 \quad (6.18)$$

#### FOLDING AND FEATHERING 3 BLADE

$$PIPA = IPA + 0.70(0.9PHD)^2 \quad (6.19)$$

For a folding propeller  $PHD$  shall not be taken greater than  $3.5 \cdot PSD$  in the above formulas (6.18, 6.19), while for a feathering propeller  $PHD$  shall not be taken greater than  $4.0 \cdot PSD$ .

#### SOLID 2 BLADE

$$PIPA = IPA + 0.10PRD^2 \quad (6.20)$$

#### SOLID 3 AND MORE BLADES

$$PIPA = IPA + 0.12PRD^2 \quad (6.21)$$

If  $ESL$  is less than  $PRD$ ,  $PIPA$  shall be multiplied by 0.5.

### 6.2.2 STRUT DRIVE

PIPA shall be determined as follows:

#### FOLDING AND FEATHERING 2 BLADE

$$PIPA = 0.06ST1(ST5 - 0.5ST4) + 0.4(0.8ST4)^2 \quad (6.22)$$

#### FOLDING AND FEATHERING 3 BLADE

$$PIPA = 0.06ST1(ST5 - 0.5ST4) + 0.42(0.8ST4)^2 \quad (6.23)$$

#### SOLID 2 BLADE

$$PIPA = 0.06ST1(ST5 - 0.5ST4) + 0.10PRD^2 \quad (6.24)$$

## SOLID 3+ BLADES

$$PIPA = 0.06ST1(ST5 - 0.5ST4) + 0.12PRD^2 \quad (6.25)$$

Notes:

1. The shape of the strut may be modified, but the full functionality of the standard model must be retained and  $ST1 - ST4$  values may not be reduced below the unmodified standard dimensions. For handicapping purposes  $ST1 - ST4$  shall not be taken bigger than the unmodified standard dimensions.
2.  $ST4$  shall be measured at the aft end of the hub instead of at the point of maximum projected area, better representing the flow separation drag.
3. An upper  $ST4$  limit will be used for the  $PIPA$ . This limit depends on the  $L$  of the yacht. The maximum is defined by a curve of values just above those typical of most common production units, faired over an ample length range. The upper limit for  $ST4$  is thus defined as the lesser of:

$$(4 \cdot 10^{-5} \cdot L^3 - 0.0011L^2 + 0.015L + 0.05) \quad \text{or} \quad 0.2 \quad (\text{but never less than } 0.1) \quad (6.26)$$

### 6.2.3 IN APERTURE

For propellers of any type installed in an aperture  $PIPA$  shall be taken as the least of the values determined by the formulae:

$$PIPA = 0.07 \cdot PRD^2 \quad (6.27)$$

$$PIPA = 0.07 \cdot \left( \frac{APT}{0.4} \right)^2 \quad (6.28)$$

$$PIPA = 0.07 \cdot \left( \frac{APH}{1.125} \right)^2 \quad (6.29)$$

$$PIPA = 0.07 \cdot \left( \frac{APB}{0.4} \right)^2 \quad (6.30)$$

### 6.2.4 TRACTOR PROPELLERS

For tractor propellers of any type installed out of aperture  $PIPA$  shall be zero.

### 6.2.5 TWIN SCREWS

ORC has an input to signify twin propeller installations. If this is indicated,  $PIPA$  is doubled for any type of installation or propeller.

## 6.3 RESIDUARY RESISTANCE

The residuary resistance is divided into resistance of canoe body and resistance of appendages:

$$D_{RESIDUARY} = Rr_{canoe} + Rr_{appendages} \quad (6.31)$$

### 6.3.1 CANOE BODY

The calculation<sup>4</sup> of the wave-making or residuary resistance is based on the calculation of a residuary resistance coefficient at preset values of Froude Number ( $F_n$ ). The  $F_n$  is a non-dimensional speed based on the yachts Dynamic Length  $L$

$$F_n = \frac{V}{\sqrt{g \cdot L}} \quad (6.32)$$

How the dynamic length is determined is explained below, see *Composite Length Calculation*. The hull is the main element of the residuary resistance, with a small contribution from the appendages.

---

<sup>4</sup>Major revision 2013



Recognizing that previous attempts to accurately calculate the effect of several hull parameters such as Prismatic Coefficient, Longitudinal Center of Buoyancy (*LCB*) and water plane area coefficient have led to undesirable type-formed hull shapes and that this trend could not be addressed within the existing model, it was decided to simplify the input parameters accounting for 2 main parameters only: dynamic Length-Volume ratio ( $LVR = L/Vol^{1/3}$ ), and Beam to Canoe-body-draft ratio (*BTR*) to avoid as much as possible any type-forming. The effects of hull volume distribution are still captured by the use of the traditional integrated lengths.

## RESISTANCE SURFACES

The *Rr* drag curve for the canoe body is formed by the extraction of drag values at 24 Froude numbers (*Fn*) from surfaces of *BTR* and dynamic *LVR* and ranging from *Fn* 0.125 up to *Fn* 0.7.

The Froude number used also incorporates dynamic length. For speeds outside this range the resistance is extrapolated. The *BTR* and *LVR* ranges of the surface are 2.5 to 9 and 3 to 9 respectively and outside this range the value defaults to that of the closest point of the surface.

The *LVR* – *BTR* surfaces are very similar to the example plots below and the points from which they are derived can be downloaded in .CSV file format from [www.orc.org/rules](http://www.orc.org/rules).

The CSV file is a tabulation of the coordinates of the surfaces interrogated by the VPP as it calculates the Residuary Resistance per unit of displacement.

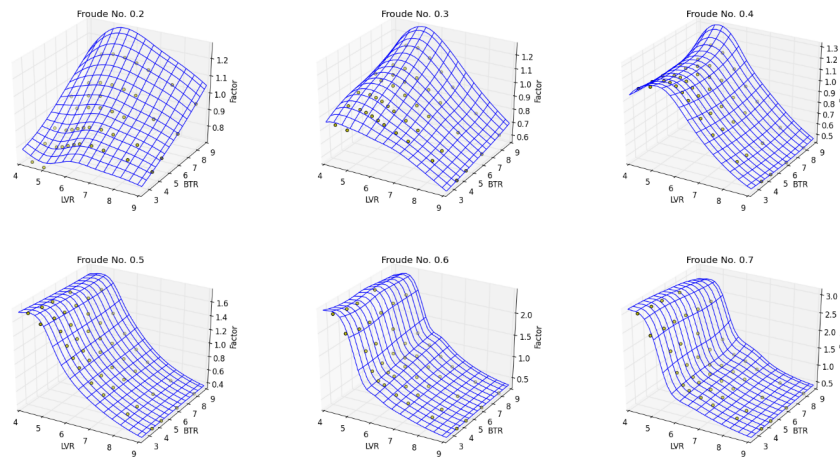


FIGURE 6.4: Typical *Rr* multiplier at fixed Froude Number

In 2014 fine tuning of RR surfaces was made in areas not very well defined (low *LVR*, high *Fn*).

## COMPOSITE LENGTH CALCULATION

Up until 2013 2 *LSM*<sup>5</sup> length values were compounded into a single “L” value used as the reference waterline length to calculate Froude Number. In the 2013 VPP, *LSM1* was retained, and two new sunk length values were created, *LSM4* and *LSM6* which are used only in the determination of residuary resistance. To help with the coding nomenclature the *LSM* terms used in the calculation of residuary resistance were given the pre-fix RR, i.e. *RRLSM1*<sup>6</sup>, *RRLSM4* and *RRLSM6*.

RRLSM Flotation Planes

RRLSM	Exponent in equation 4.11	Height above Sailing Waterplane	
		Fwd	Aft
RRLSM1	0.3	0	0
RRLSM4	0.4	$RRLSM1 * 0.736 * LVR^{-2.15}$	$RRLSM1 * 1.105 * LVR^{-2.15}$
RRLSM6	0.45	$RRLSM1 * 0.093 * LVR^{-1.2}$	$RRLSM1 * 0.140 * LVR^{-1.2}$

Recognising that the wave height, the dynamic heave and therefore the physical length itself are highly sensitive to both Froude number and Length volume ratio (*LVR*), a new scheme was developed to improve the treatment of

<sup>5</sup>LSM: Length Second Moment-see equation 4.11

<sup>6</sup>*RRLSM1* = *LSM1*

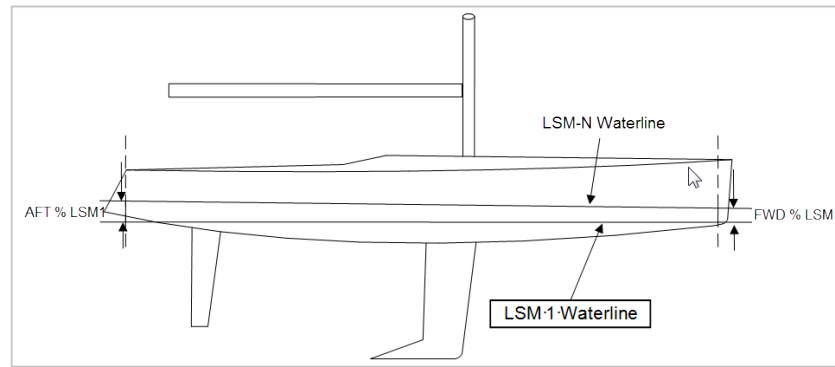


FIGURE 6.5: Floatation planes

“effective length.” Two new sunk length values were created, namely *RRLSM4* and *RRLSM6*, aimed at  $Fn > 0.35$  and  $Fn < 0.35$  respectively. The height of *RRLSM4* is aimed to match wave heights at  $Fn$  0.4, while the height of *RRLSM6* is designed to match waves heights at  $Fn$  0.3, and both depend on suitable functions of the yachts length and *LVR*. *RRLSM6* has a lower length exponent than *RRLSM4*, because at  $Fn < 0.35$  having a lot of volume in the ends rather than in the middle is not as beneficial as it is at  $Fn > 0.35$ . The static sailing waterplane length *RRLSM1* has also had its exponent reduced to reflect that it is now only primarily used at slow speeds. The new *L* is dependent on Froude number, and based on length mixtures which are linearly interpolated in four phases:

- **Phase 1:**  $0.125 < Fn < 0.3$  *L* is a mixture of *RRLSM1* and *RRLSM6*, starting at 100% *RRLSM1* and finishing at  $Fn$  0.3 as 100% *RRLSM6*
- **Phase 2:**  $0.3 < Fn < 0.4$  *L* is a mixture of *RRLSM6* and *RRLSM4*, starting as 100% *RRLSM6* and finishing as 100% *RRLSM4*
- **Phase 3:**  $0.4 < Fn < 0.5$  *L* is a mixture of *RRLSM4* and *RRLSM1*, starting at 100% *RRLSM4* and ending as 70% *RRLSM4*
- **Phase 4:**  $0.5 < Fn$  *L* is a mixture of *RRLSM4* and *RRLSM1*, continuing as 70% *RRLSM4*

For values of  $Fn > 0.4$  the *RRLSM6* loses relevance, but the wave length grows longer than the hull as the  $Fn$  continues to increase, resulting in a reduction of the wave height locally at the transom, so *RRLSM1* is mixed in to reduce the effective length appropriately, representing a 30% share of *L* by  $Fn$  0.5 and then continuing at that ratio for higher Froude numbers.

Froude No	0.125	0.2	0.25	0.3	0.35	0.4	0.45	0.5	0.6	0.7
RRLSM 1	1	0.6	0.3	0	0	0	0.15	0.3	0.3	0.3
RRLSM 4	0	0	0	0	0.5	1	0.85	0.7	0.7	0.7
RRLSM 6	0	0.4	0.7	1	0.5	0	0	0	0	0
Sum	1	1	1	1	1	1	1	1	1	1

TABLE 6.1: *L* calculation scheme

### 6.3.2 APPENDAGES

The original Delft Series models had all been tested with a standard keel and rudder and consequently the original MHS approach was to include the appendages as part of the total displacement for the purposes of calculating residuary resistance. On yachts with hull forms where the appendage/canoe body interface was less than well defined this worked satisfactorily. Over time however a more sophisticated treatment was sought, and now all of the DSYHS models have been tested as bare canoe bodies. An algorithm for appendage residuary resistance that is sensitive to both keel volume and depth was derived<sup>7</sup>. The residuary resistance of an element of keel or bulb is based on 2 baseline curves shown in Figure 6.6. These show the resistance per unit volume normalized against  $Fn^2$  for an element of keel fin or bulb at

<sup>7</sup>Jim Teeters US Sailing

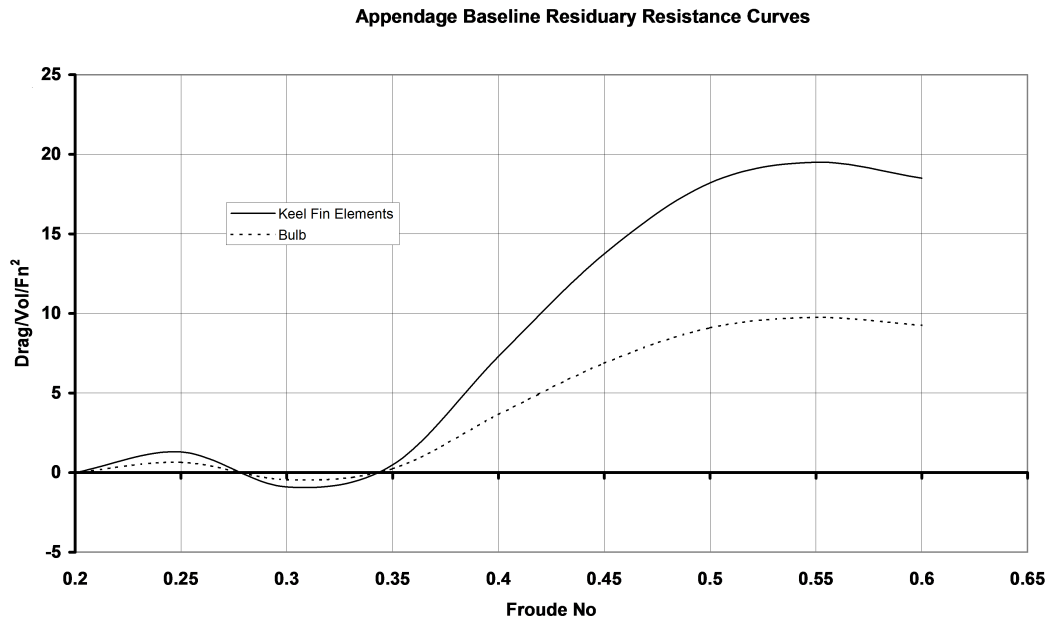


FIGURE 6.6: *Appendage residuary resistance per unit volume at standard depth.*

the standard depth,  $0.1L$  and  $0.2L$  respectively. As described in section 6.1.2, the VPP divides the keel into 5 fore and aft strips, stacked on top of each other. The volume and average depth of each strip is calculated. The major factors that influence the wave-making drag of an appendage “strip” are:

1. Appendage strip volume
2. Appendage strip depth below the free surface
3. Boat speed
4. Whether or not that piece of volume is a bulb or part of the vertical foil

Bulbs are more three-dimensional in nature, apparently cause less disturbance to the water flow, and have less drag per unit volume. The drag of bulbs per unit volume is approximately half that of keel strips. The attenuation of drag with depth is approximately linear for both keel strips and bulbs.

Currently, the VPP looks for bulbs only in the deepest strip of a keel. The test criterion is the ratio of the chord length of that deepest strip to the chord length of the strip above it. If that chord ratio is  $\geq 1.5$ , then the deepest strip is considered to be a bulb. If the ratio  $\leq 1.0$ , the strip is a keel strip. If the ratio is between 1.0 and 1.5, the drag is found by linear interpolation over chord ratio of the two drags found by treating the strip as a bulb and as a keel.

Where the upper keel strip is determined to be greater than  $1.5 \times$  the average of strips 2, 3, & 4 then the residuary resistance of the strip is calculated using the “Bulb” residuary resistance line<sup>8</sup>. For traditional style hulls where the keel chord exceeds 50% of  $LSM1$  then the keel volume is added to the canoe body volume for the purposes of calculating the residuary resistance.

In 2011 the RR of keels having long chords has been further reduced: a reduction factor is applied to the drag of each keel strip, proportional the ratio of the chord of the strip to  $LSM1$ . Full drag is given for keels having chords smaller than  $0.05 \cdot LSM1$ . Then a linear reduction from  $c = 0.05 \cdot LSM1$  to  $c = 0.15 \cdot LSM1$  is enforced. For chords larger than  $0.15 \cdot LSM1$  it is assumed that the RR of that strip is negligible.

## 6.4 DRAG DUE TO HEEL

A new formulation of the heeled drag is included in the new hydro model based on calculation of heeled viscous and residuary resistance components using the same parameters (Wetted Area,  $BTR$  and  $LVR$ ) but calculated with the boat heeled.

<sup>8</sup>2011 To address the use of high volume keel strakes

## 6.5 INDUCED DRAG

This formulation<sup>9</sup> also takes into account the asymmetry of the heeled hull form, and then considers appendages size (and special configurations like canards and trim tabs) so that leeway angle can be calculated and used to compute the induced drag. The methodology implemented is as follows:

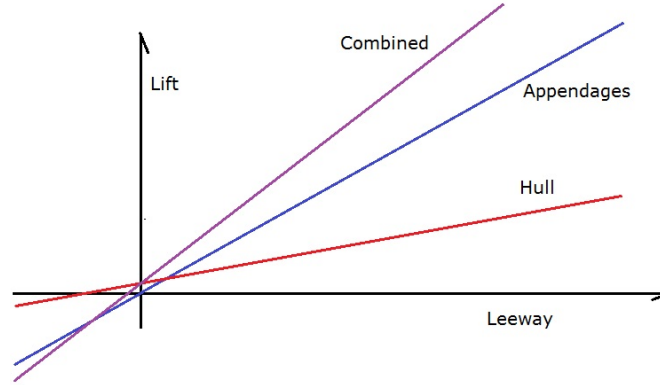


FIGURE 6.7: *Induced Drag*

- Formulate lift area (Coefficient of lift multiplied by projected area, abbreviated as “Cl”) versus leeway angle slopes and axis intercepts for the hull and for the combined appendages, based on simplified lifting line theory for the hull plus a modified version of the lift efficiency modified by *BTR* and *LVR* method already in place in the VPP for the appendages;
- Determine from the LPP a hull yaw angle at zero leeway due to the asymmetry of the heeled hull shape. This is based on the transverse shift of the center of buoyancy in the forward and aft end of the hull;
- Combine both hull and appendage lift Coefficient (*Cl*) vs Leeway lines to create a total coefficient of lift area line (*tcla*) which considers areas and initial slopes (for canard or trim tab yachts, the hull share of lift is assumed to be zero).

In the VPP solver operation the procedure is to:

- Divide applied side force by  $0.5 \cdot \rho \cdot V s^2$  to obtain the required *tcla*;
- determine leeway at the applied *tcla*;
- determine separate hull and appendage lift shares at the leeway angle obtained;
- From effective spans of hull and appendages, determine the induced drag components  $DI_j$  of both canoe body and appendages, using the effective canoe body draft, and the *MHSD* respectively as the (Effective Draft) value in equation (6.33).

$$DI_j = \frac{F_{Hj}^2}{r \cdot t \cdot V^2 \cdot (Effective\_Draft_j)^2} \quad (6.33)$$

where

$$\begin{aligned} F_{Hj} &= \text{Heeling Force on the component } j \text{ (appendages or canoe body)} \\ DI_{total} &= DI_{appendages} + DI_{hull}, \text{ with both } DI \text{ components accounted for.} \end{aligned}$$

Along the above procedure, the appendages area is a heel dependent function, where the rudder area is taken as zero when the boat is upright, and increases sinusoidally up to twice its physical area at 30 degrees of heel. This takes into account the increasing contribution to lift of the rudder due to the increase of rudder angle with heel<sup>10</sup>.

Moreover, for taking into account the non optimal sharing of lift between the two appendages (and even the occurrence of negative rudder angles at small heeling angles), in 2018 the induced drag calculated by means of the

<sup>9</sup>Major changes 2013

<sup>10</sup>This functions has been adjusted in 2018, up to 2017 the rudder area started from its physical area upright

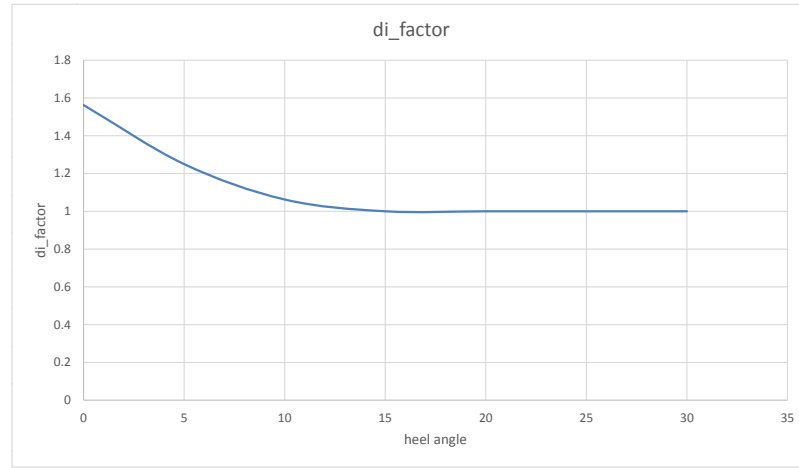


FIGURE 6.8: *Multiplier of induced drag*

above scheme is then reparametrised with heel using the multiplier plotted in fig. 6.8. This factor is fully active upwind, then smoothly decreases up to being inactive (that is equal to 1) when the drive to side force ratios become greater than 0.4.

The programmed structure of this method has allowed for the factors to be tuned to match closely the CFD and tank data, and then checked against the existing fleet.

TERM	Description	Conventional	Canting Keel	Canting Keel + CL canard / dagger board	Canting Keel & twin daggerboards
Wave Trough	Wave Trough Keel Root emergence	1.0	1.0	0.5	0.0
Hull Asymmetry	Hull asym. angle used in canoe body lift	Yes	Yes	Yes	Set to zero regardless of calculated hull asym. angle
MHSD	Effective draft Calculation	MHSD	Use keel projected area on hull centre-plane for lift calculation	Use keel projected area on hull centre-plane for lift calculation, or max draft of canard.	Use maximum achievable draft, And use daggerboard area for lift calculation, and projected area for canted keel
FunSteady	FunSteady	1.0	Should always be in credit, cut off is $MHSD = 19\%$ Length	Should always be in credit, cut off is $MHSD = 19\%$ Length	Should always be in credit, cut off is $MHSD = 19\%$ Length

When a boat has a canting keel plus daggerboards, the transverse inclination of the daggerboard is properly accounted for the calculation of effective draft at all heel angles. Taking into account the heel angle  $\phi$ , the longitudinal and transverse position of the canard ( $c_{xoff}$  and  $c_{yoff}$  respectively), the shape of the boat section at the canard root, the canard span and its angle  $c_{angle}$  to the longitudinal centerplane, angle, the draft of the canard when the boat is heeled is determined as:

$$trmax_c = t_{c\_root} + c_{span} \cdot \cos(c_{angle} - \phi) \quad (6.34)$$

This draft is compared to the keel effective draft, and the maximum is taken for the sake of induced drag calculation.

### 6.5.1 CORRECTION FACTORS

In 2013, beside the new method for assessing the induced drag, also the correction factors of the effective draft were computed with different algorithms, which empirically accounts for the keel root proximity to water surface and for unsteady effects that are not captured by the steady solution of the VPP.

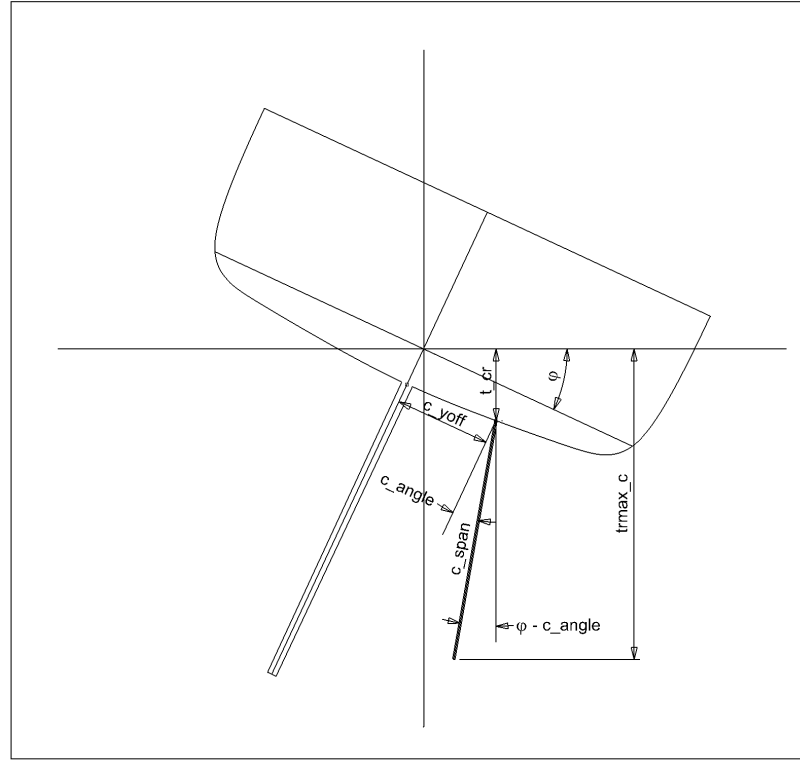


FIGURE 6.9: Scheme of bilgeboards and related variables

#### KEEL ROOT FREE SURFACE FACTOR

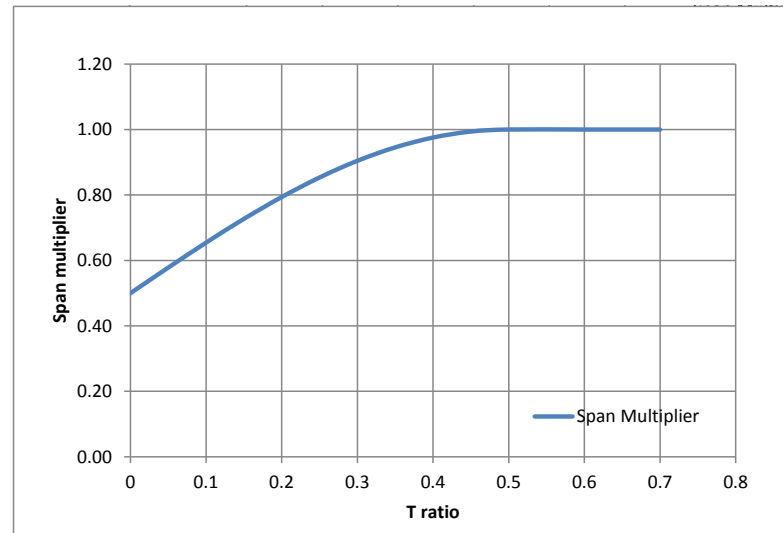


FIGURE 6.10: Keel root free surface factor

A first correction is introduced for the effective span, based on the proximity of the keel root chord to the free surface. It's calculated as

$$beff_{av_{mult}} = 0.5 \cdot (beff_{peak} + beff_{trough}) \quad (6.35)$$

where the  $beff$  for peak or trough is:

$$beff = 0.5 + 0.5 \cdot \sin(\pi \cdot tratio) \quad (6.36)$$

The function  $beff(tratio)$  is plotted in Figure 6.10.

The parameter  $tratio$  is computed for both extrema of the wave (peak and trough), and is constrained within the range  $[0, 0.5]$ :

$$tratio_{peak} = 2 \cdot dist_{max} / (0.15 LSM1) \quad (6.37)$$

$$tratio_{trough} = 2 \cdot dist_{min} / (0.15 LSM1) \quad (6.38)$$

where

$$dist_{max} = z_{root} + h_{dyn} + 0.5 \cdot h_w \quad (6.39)$$

$$dist_{min} = z_{root} + h_{dyn} - 0.5 \cdot h_w \quad (6.40)$$

is an estimation of the distance of the keel root chord from the free surface. This distance depends on the position  $z_{root}$  of the root chord in static condition, on the correction  $h_{dyn}$  of the free surface in dynamic conditions, and on a wave of estimated height  $h_w$ , produced by an “energy”  $E_w$  which is a function of the true wind speed  $TWS$ :

$$h_{dyn} = -0.087641 \cdot LSM1 \cdot fact_{Fn} \cdot \exp(-0.417 \cdot lvr) \quad (6.41)$$

$$h_w = 0.25 TWS \cdot \left[ 2 \cdot \frac{E_w}{\rho \cdot g} \right]^{1/2} \quad (6.42)$$

$$E_w = TWS \cdot [1 - 0.8375(1.174^{-0.00248 TWS^{3.5}})] \quad (6.43)$$

For boats with double canard (daggerboard) no reduction is given, thus  $beffav_{mult} = 1$ , while for boats with single canard the credit is halved:  $beffav_{mult} = beffav_{mult} + 0.5 \cdot (1 - beffav_{mult})$ .

## FUNSTEADY

The *funsteady* term takes empirically into account the difficulty of reaching the maximum performances after maneuvering. It is a multiplier which is made by a term based on the ratio of wind speed and boat displacement.

$$funsteady = 1 - \frac{1}{200} \cdot \left[ \frac{TWS - 10}{(Vol + 3)} \right]^2 \quad (6.44)$$

where *funsteady* is lower bounded by 0.9. *Vol* is the volume of the canoe body.

## 6.6 IMMersed TRANSOM

The following section describes a generic wave height calculation procedure for assessing the immersed transom areas as a function of Froude Number and the calculation of the drag due to the immersed transom. The height of the wave at the end of the static WL was found from the wave elevation observations of 13 non appended models of the Delft Systematic Series to be approximately

$$WH_{WLend} = a1 \cdot \frac{VLR_{mult}}{10} \cdot LSM1 \cdot c_{vtr}^5 \quad (6.45)$$

where

$$VLR_{mult} = 2.1 \left[ \frac{VOL_c^{1/3}}{LSM1} \right]^{1.5} \quad (6.46)$$

$$a1 = 1.233 \cdot \log(Fn) + 1.985 \quad (6.47)$$

$$c_{vtr} = \min(VLR_{mult}/0.15, 1.0) \quad (6.48)$$

Two different stern flow conditions are considered.

1. In the case of the flow separation from the profile of the overhang the wave height at the transom with a standard overhang length of  $0.135 \cdot LSM1c$  is calculated by linear interpolation from the wave height at the end of the static waterline  $WH_{WLend}$  and the point of separation which is defined as the non-dimensional length  $a2$

$$WH_{stdOverhLength} = WH_{WLend} \cdot \left( 1 - \frac{1}{a2} \right) \quad (6.49)$$

where

$$a2 = \min(56(Fn(L) - 0.20)^{1.75} \cdot Overh_{separPt(Fn=0.3)}, 1.0) \quad (6.50)$$

$$Overh_{separPt(Fn=0.3)} = 0.30 + \left( \frac{0.115}{VLR_{mult}} \right)^4 \quad (6.51)$$

being the overhang separation point at  $Fn=0.3$

2. In the case of transom flow separation, which occurs when  $a2$  is becoming 1 or greater, the wave height at the transom with a standard overhang length of  $.135 * LSM1c$  is calculated as

$$WH_{stdOverhLength} = WH_{end} \cdot a3 \cdot a4(i + x) \quad x = 0, \dots, 3 \quad (6.52)$$

with

$$a3 = \frac{(1.1 - Fn)}{0.975} \quad (6.53)$$

and with  $a4$  being a degradation factor with increasing  $Fn$ 's and  $(i)$  denoting the  $Fn - index$  at which  $a2$  becomes 1.

$$\begin{aligned} a4(i) &= 0.25 \\ a4(i + 1) &= 0.5 \\ a4(i + 2) &= 0.75 \\ a4(i + 3) &= 1 \end{aligned} \quad (6.54)$$

The wave height at the real transom is again calculated by linear interpolation as

$$WH_{stern} = dWH \cdot \left( \frac{0.15LSM1c - Overhang}{0.15LSM1c} \right) + WH_{stdOverhLength} - \min(ztran, 0) \quad (6.55)$$

where  $ztran$  is the height of the transom lower edge above the static waterplane, and

$$dWH = WH_{WLend} - WH_{stdOverhLength} \quad (6.56)$$

$$Overhang = LSM5c - LSM1c \quad (6.57)$$

$LSM5c$  being the  $LSM$  of the boat sunk to the lowest point of the transom, if above  $WL$ . In 2011 the wave height at the transom was reduced by the trim effect of shifting the crew 10% of  $LSM1$  forward<sup>11</sup>.

In 2012 the transom drag (above or below the waterline) used for the calculation of the immersed transom drag has been modified taking into account the possibility of moving the crew toward the bow for minimizing it.

This is done by an iterative process: first the immersed transom drag is calculated, and evaluated at  $Fn = 0.350$ . If there is any transom drag at that velocity, the transom height above the waterline is increased by an amount corresponding to a crew shift forward of  $0.01L$ . Then the check is performed again. If there is still a non zero drag, the transom height is increased again by the same amount. The process continues up to a maximum shift of the crew toward the bow of  $0.15L$ . At that stage, any nonzero immersed transom drag is considered the most reliable estimate of this resistance component.

The immersed transom area is the area below a horizontal plane of the height  $WH_{aboveWL}$ .

$$WH_{aboveWL} = WL_{stern} + H_{Tprof} \quad (6.58)$$

with  $H_{Tprof}$  being the intersection of the transom and the regression line from the profile points of the afterbody of the hull.

The viscous drag component due to an immersed transom is calculated by means of Hoerner's formula for the base drag of a fuselage with a truncated tail end.

$$Cd_{hull} = 0.029 \cdot \frac{(A_{tr} - AMS1c)^{1.5}}{Cd_{hull}} \quad (6.59)$$

where

$$\begin{aligned} A_{tr} &= \text{the immersed transom area as calculated by the above outlined procedure} \\ AMS1c &= \text{the midship section area in sailing trim} \\ Cd_{hull} &= Rf_{hull} / (\rho/2 \cdot v^2 \cdot AMS1c) \\ Rf_{hull} &= \text{the frictional resistance of the canoe body} \end{aligned}$$

<sup>11</sup>This was done to discourage the adoption of extreme stern down trim



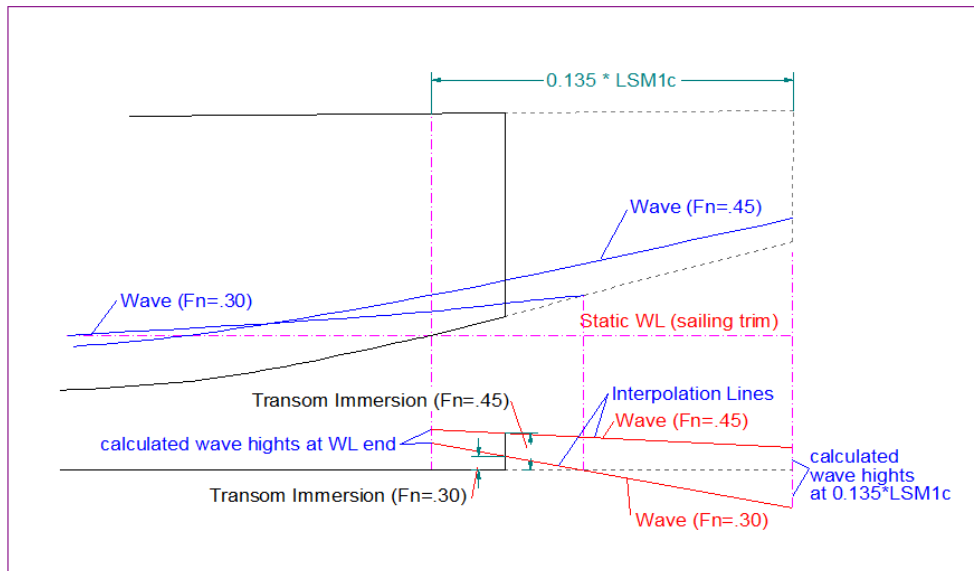


FIGURE 6.11: Principle of estimating transom immersion

## 6.7 RAIL-UNDER DRAG

Rail-under drag is not intended to calculate the drag of immersing the lee rail, it is an artifice intended to prevent the VPP finding equilibrium sailing conditions at high heel angles. Rail-under drag is zero up to a heel angle of 30 degrees. Above this value the upright residuary resistance is multiplied by a factor and added to the total drag.

$$D_{RU} = 0.0004 \cdot D_{RESIDUARY} \cdot (\phi - 30)^2 \quad (6.60)$$

## 6.8 ADDED RESISTANCE IN WAVES, $R_{AW}$

The addition of an added resistance in waves (RAW) module to the VPP<sup>12</sup> was brought about by the fact that cruising yachts, with outfitted interiors, were disadvantaged relative to their “stripped out” racing rivals. This is not surprising, since reducing the yacht’s moment of inertia by concentrating weight close to the centre of gravity will yield a performance gain when sailing in waves. The US Sailing funded project to introduce this feature into the VPP had three aims which tackled the fundamentals of predicting  $R_{AW}$ :

1. Define a sea spectrum (wave energy density function) appropriate to the sailing venue
2. Devise a plausible and appropriately sensitive physical model of how parametric changes to the yacht affect RAW when sailing in the sea state defined in 1
3. Devise a method by which a yacht’s pitch inertia could be determined directly by a physical test, in the same way that stability is measured by an inclining test.

### 6.8.1 WAVE CLIMATE

As part of the research prior to introducing the RAW module, US Sailing funded the deployment of a wave height measuring buoy at several popular sailing venues. The buoy was deployed during typical races and the water surface elevations were recorded together with the wind speed. On the basis of these measurements a single definition of wave climate was derived in the form of a wave energy spectrum normalised for a true wind speed of one knot. This approach has the merit that it is relatively easy to apply, because, whilst the significant height becomes a function of wind speed the modal period remains fixed at 5 seconds. When this experimentally-derived linear variation of wave energy with wind speed was implemented it was found that the magnitudes of RAW were too high. Added resistance effects were seen to be dominating handicaps in 6 to 8 knots of wind when the sailors could see that no waves were

<sup>12</sup>1990

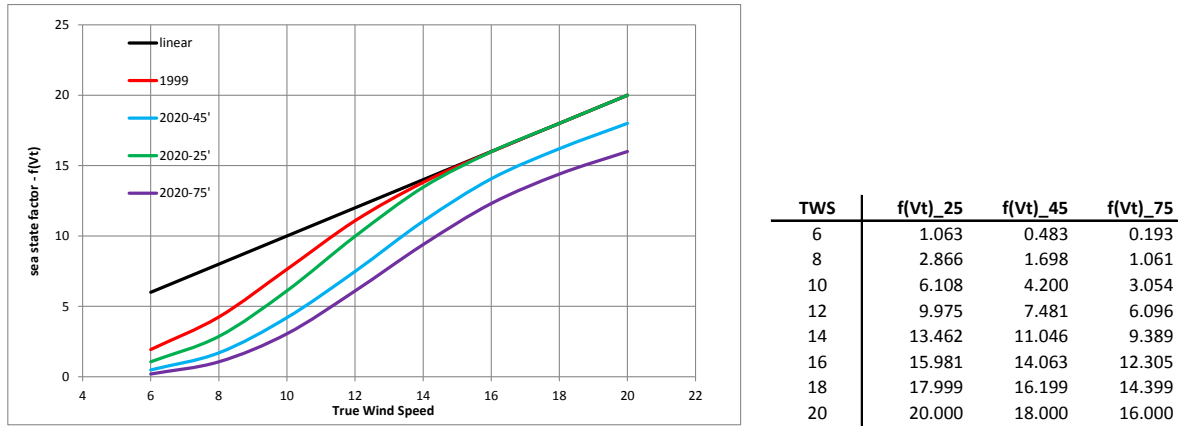


FIGURE 6.12: Wave Energy as a function of True Wind Velocity

present on the race course. In order to correct this, a “bubble” (or more correctly a dimple) was put in the curve that defined the wave energy as a function of wind speed.

In 2017 and then in 2020 the bubble has been further decreased, and a length dependency has been introduced. This has been done by defining three baselines for length of 25, 45 and 75 feet. For any length in between the energy is found by linear interpolation of the baselines. For length exceeding the maximum or lengths below the minimum, the energy of the baseline curve is used.

Figure 6.12 shows on the left the original linear sea-state factor together with the 1999 reduction and 2020 baselines, and on the right the numerical values of the three baselines for 2020.

## 6.8.2 DETERMINATION OF ADDED RESISTANCE RESPONSE

Equation 6.61 shows how the added resistance is calculated from the product of the wave energy spectrum and the  $R_{AW}$  RAO. The wave spectrum in each wind speed is defined by a constant multiplied by  $f(V_t)$ , the modulation function discussed in the previous section, that depends on the true wind speed  $V_t$ . The task facing the handicappers was to produce RAO values for parametric variations of sailing yacht hull forms.

$$\bar{R}_{AW} = 2 \cdot \int_0^\infty \frac{R_{AW}}{\zeta_a^2} \cdot S_\zeta(\omega) d\omega \quad (6.61)$$

Equation 6.62 shows the formulation<sup>13</sup> and the baseline parametric values are shown in Table 6.2.

$$R_{AW} = f_s \cdot 2\rho g L \cdot f(V_t) \cdot 0.55 \cdot f(\beta_T) f(L_{30}) [0.00146 + f(Fn) + f(K_{YY}) + f(L/B) + f(B/T) + f(LCB - LCF)] \quad (6.62)$$

In 2017 the influence of the term depending on  $LCB$  and  $LCF$  has been removed. In 2020 the  $GYR$  term has been reduced by 33% by changing the constant term from 0.01575 to 0.010395. The active terms are defined as

$$L = 0.3194 \cdot (2 \cdot LSM1 + LSM4) \quad (6.63)$$

$$f(Fn) = 0.00191(Fn - 0.325) \quad (6.64)$$

$$f(k_{YY}) = 0.010395 \cdot (GYR - 0.25) \quad (6.65)$$

$$f(L/B) = \frac{5.23^{-L/B} - 5.23^{-3.327}}{8.494} \quad (6.66)$$

$$f(B/T) = 0.000166 \left( \frac{B}{T_C} - 4.443 \right) \quad (6.67)$$

$$f(L_{30}) = 0.5059 \log \left( \frac{L}{30} \right) + 1 \quad (6.68)$$

$$f(\beta_T) = \frac{\cos \beta_T}{\cos 40} \quad (6.69)$$

$$(6.70)$$

<sup>13</sup>1999

In equation 6.62 the  $f_S$  factor provides a means to adjust the added resistance values and perhaps can be thought of

PARAMETER	SERIES RANGE	BASE VALUE
GYR	0.2-0.32	0.25
L/B	2.77-4.16	3.327
$L^3/\nabla$	103-156	125
LCB	0.50-0.56	0.53
LCF	0.54-0.60	0.57
B/TC	–	4.443
Fn	–	0.325

TABLE 6.2: Added Resistance in Waves; parametric limits and base values

as a sea energy or strength coefficient. A value of 0.64 is used.

The 0.55 factor represents the wave direction function, necessary because the  $R_{AW}$  calculations for the series were done in head seas, while yachts sail at approximately 45 degrees to the prevailing wind and sea direction.

The  $f(\beta_T)$  function makes the added resistance a cosine function of heading with 40 degrees true wind (wave) heading as the basis.

The remaining functions in equation 6.62 take the difference between the boat and the base boat and then evaluate the increase or decrease in  $R_{AW}$ . The calculation of  $R_{AW}$  is done using the physical parameters ( $L, B, T_C$ ) appropriate to the sailing heel angle.

#### DETERMINATION OF PITCH RADIUS OF GYRATION (KYY)

The third element of the added resistance calculation is the determination of the pitch inertia of the yachts hull and rigging.

A yachts base radius of gyration is calculated from equation 6.71, and then other declared features of the yachts construction and rig accrue adjustments (*Gyradius\_inc*) to this base gyradius.

$$K_{YY} = 0.222 \frac{LSM4 + LSMH}{2} \quad (6.71)$$

where

$$LSMH = 0.3194 \cdot (2LSM1 + LSM4) \quad (6.72)$$

$$GYR = \frac{K_{YY}}{LSMH} + Gyradius\_inc \quad (6.73)$$

Adjustments are made to the base gyradius according to the following recorded characteristics of the yacht:

1. If Mast Weight (*MWT*) and Mast Center of Gravity (*MCG*) have been recorded, the gyradius contribution of the mast is assessed as compared to that of a hypothetical base aluminum mast (Default mast weight – *DMW*) and a corresponding mathematical gyradius adjustment is made; since 2019 this mast gyradius adjustment term is then multiplied by 0.5;

Default Mast Weight:

$$DMW = (((.00083 \cdot IG \cdot (IG + HBI)) + (.000382 \cdot IG \cdot TML))) \cdot (YP)^{0.5} \quad (\text{lbs})$$

Default Mast VCG:

$$DMVCG = 0.415 \cdot (IG + P + BAS)/2 - BAS \quad (\text{ft}) \text{ above } BAS$$

Default Rigging Weight:

$$DRW = LRW + JRW \quad (\text{lbs})$$

Default Rigging VCG:

$$DRVCG = (0.372 \cdot IG \cdot LRW + 0.5 \cdot (P + BAS + 0.85 \cdot IG) \cdot JRW)/DRW - BAS \quad (\text{ft}) \text{ above } BAS.$$

Default Mast+Rigging Weight:

$$DMW + DRW \quad (\text{lbs})$$

Default Mast+Rigging VCG above BAS:

$$(DMW \cdot DMVCG + DRW \cdot DRVCG)/(DMW + DRW)(\text{ft}).$$

where:

$$LRW \text{ (Lower Rigging Weight)} = 0.000155 \cdot IG \cdot YP \text{ (lbs)}$$

$$JRW \text{ (Jumpers Rigging Weight)} = 0.000027 \cdot (P + BAS - 0.85 \cdot IG) \cdot YP \text{ (lbs)} \text{ (0 for masthead)}$$

$$YP = (((RM25 \cdot 25) + CARM \cdot CW \cdot \cos(25^\circ)))/(CP/2)$$

$$TML \text{ (Top Mast Length)} = 0 \text{ on masthead and } P + BAS - IG \text{ on fractional}$$

$$RM25 = \text{Righting Moment per degree at 25 degrees of heel}$$

$$CARM = \text{Crew Righting Arm}$$

$$CW = \text{Crew Weight}$$

$$CP = \text{Calculated Chainplate Width} : \max(0.46 \cdot J, 0.135 \cdot IG)$$

$$\text{Masthead is defined as a rig with } IG \geq 0.95 \cdot (P + BAS).$$

2. For estimate a yacht with a carbon mast, where  $MWT$  and  $MCG$  are not recorded, the base gyradius shall be adjusted taking as mast weight:

$$MWT = DMW \cdot SQRT(70000/170000)$$

The mast weight for carbon mast is decreased of the square root of the ratio of the Young Modulus of aluminum (70000 Mpa) and that of a very high modulus carbon mast (170000 Mpa) If the boat is fitted with fiber rigging (PBO, carbon or similar) the rigging weight will be taken as: Rigging Weight =  $0.2 \cdot DRW$ , being 20% of a conventional normal rod rig the weight of an aggressive fiber weight.

3. Where  $MWT$  and  $MCG$  are not recorded, the number of spreader sets (including jumpers –one or zero), adjustable inner forestays and running backstays (see 810.2I) are totaled. Gyradius is increased by 0.002 multiplied times the number by which the above total is less than 6. This total is not taken less than zero;
4. If a yacht has a mizzen mast, Gyradius is increased by 0.002.
5. If the yacht has Forward Accommodation,  $FWD\_ADJ = 0.004$  (see 9 below);
6. If the yacht's rudder construction is carbon fiber, 0.003 is subtracted from Gyradius;
7. If the yacht is in the cruiser/racer division and complies with IMS Appendix 1,  $C/R\_ADJ = 0.006$  (see 8 below);
8. Any FWD ADJ (5 above) and any  $C/R\_ADJ$  (7 above) shall be added together and the sum reduced according to an indicator of performance potential, i.e., sail area /volume ratio. The resulting Accommodation Gyradius Increment is calculated as follows:

$$ACC\_GYR\_INCR = (C/R\_ADJ + FWD\_ADJ) \cdot ((0.6763 \cdot L + 19.6926 - SA/VOL)/(0.2263 \cdot L + 2.6926)). \text{ The term multiplying } (C/R\_ADJ + FWD\_ADJ) \text{ shall be neither negative nor greater than 1.0.}$$

$$SA/VOL = (AREA\_MAIN + AREA\_GENOA)/(DSPS/1025)^{2/3}.$$

$$ACC\_GYR\_INCR \text{ is added to Gyradius.}$$

9. If there is light material such as titanium or carbon used in lifeline elements (stanchions, pulpits, pushpits, etc.) the  $gyrad\_inc\_fraction\_of\_L$  is decreased by 0.005.

#### CRUISER/RACER PITCH GYRADIUS ALLOWANCE SCHEME

This credit scheme is intended to allow for the greater pitching inertia of boats that race with anchor and chain in the bow (anchor and chain should be located in the forward 30% of the boat and should be lodged in forepeak fully reachable from deck.

The total gyradius increment due to the anchor and chain shall not be taken as more than 0.013. The gyradius increment will be added to the gyradius derived in.

## 6.9 CONSTRUCTION MATERIAL LENGTH FACTOR

In 2017 the approach to the construction material changed. Before, a credit or penalty were given in terms of gyradius. The ITC agreed in removing the gyradius credit or penalty because in recent years the weight saved by a light construction is placed down in the bulb and no more in the bilge. Therefore it's not obvious that the masses are more concentrated around the center of gravity and that the gyradius decreases.

<i>Construction</i>	<i>Length Factor</i>
CARBON	1.000
LIGHT	0.995
CORED	0.990
SOLID	0.985

TABLE 6.3: *Length factor for construction material*

On the other hand, a stiffer material makes the boat stiffer. This means that it keeps longer when the forestay is in tension, bending less. Following this argument, a length factor is applied only upwind, based on the construction material. The length used to enter in the Fn-Residuary Resistance tables is shortened based on the construction material as shown in Table 6.3

## 7 ENVIRONMENT

### 7.1 WIND TRIANGLE

The wind triangle relationships as implemented in the VPP include the effects of heel and the assumed wind gradient. The VPP resolves the total aerodynamic force relative to the fore and aft center plane of the mast, a lift force normal to it and a drag force in the plane of the mast. Therefore in order to introduce the effect of heel the true wind vector is modified as follows.

First, the true wind vector is resolved into components perpendicular and parallel to the yacht's velocity vector. Only the perpendicular component is multiplied by the cosine of the heel angle. To account for the variation in true wind velocity with height, both components are multiplied by a factor representing this change. Once this is done, the now modified True wind vector can be used in the normal vector analysis to yield the apparent wind vector at the centre of effort of the sails.

$$V_{Tz} = V_{Tzref} \cdot \frac{\log\left(\frac{z}{z_0}\right)}{\log\left(\frac{z_{ref}}{z_0}\right)} \quad (7.1)$$

where<sup>1</sup>

$$\begin{aligned} z &= \text{height above water plane} \\ z_{ref} &= 10.0 \text{ m, reference height for } V_T \text{ measurements} \\ z_0 &= 0.005 \text{ m} \end{aligned}$$

The apparent wind angle ( $\beta_A$ ) is calculated from the following formula.

$$\beta_A = \tan^{-1} \left( \frac{V_T \cdot \sin \beta_T \cdot \cos \phi}{V_T \cdot \cos \beta_T + V_s} \right) \quad (7.2)$$

The corresponding apparent wind speed ( $V_A$ ) is calculated as follows.

$$V_A = \sqrt{(V_T \cdot \sin \beta_T \cdot \cos \phi)^2 + (V_T \cdot \cos \beta_T + V_s)^2} \quad (7.3)$$

### 7.2 SAILING ANGLES

The VPP calculates the sailing speed at the following true wind angles and wind speeds:

The calculations are done for the upwind sails (mainsail and jib) and downwind for the mainsail with each declared off wind sail type.

The results are polar curves for each true wind speed, and the program then chooses the sail combination to produce best speed and uses this in the table of handicaps.

#### 7.2.1 VELOCITY MADE ALONG THE COURSE. (VMC)

The VMC<sup>2</sup> concept is similar to the VMG for upwind or downwind sailing. The goal is to reach the mark, which is at an hypothetical prescribed heading, in the minimum time. This is accomplished sometimes by a course different from the straight, shortest one. Sometimes a course made of two legs, one closer to the wind and the other farther from it, is faster than the direct one. The implementation of this concept is made by calculating the best VMC for the (TWS, TWA) printed in the certificate, but using a splined continuous polar of the best performance of the boat evaluated at two degree intervals.

---

<sup>1</sup>the reference value of  $z_0$  has been modified in 2022, from 0.001 to 0.005: published data suggest that the big majority of races take place in venues where the wind profile is better described by a more stable and thick boundary layer, therefore using a  $z_0$  value of 0.005. This has the effect of reducing wind velocities at lower levels.

<sup>2</sup>2011

Rated boat velocities in knots							
Wind Velocity	6 kt	8 kt	10 kt	12 kt	14 kt	16 kt	20 kt
Beat Angles	42.8°	41.3°	40.9°	39.8°	39.0°	38.3°	38.3°
Beat VMG	4.06	4.88	5.38	5.64	5.77	5.87	5.98
52°	6.20	7.32	7.87	8.08	8.19	8.25	8.39
60°	6.58	7.64	8.10	8.31	8.42	8.49	8.62
75°	6.91	7.87	8.29	8.55	8.75	8.88	9.03
90°	7.11	8.07	8.50	8.80	9.08	9.28	9.64
110°	6.87	7.95	8.46	8.87	9.33	9.78	10.55
120°	6.50	7.73	8.36	8.80	9.29	9.75	10.72
135°	5.77	7.09	7.99	8.48	8.91	9.44	10.69
150°	4.85	6.01	7.10	7.94	8.42	8.83	9.85
Run VMG	4.20	5.21	6.14	6.94	7.58	8.17	8.99
Gybe Angles	141.5°	146.5°	149.0°	155.0°	166.0°	180.0°	180.0°

TABLE 7.1: *VPP True wind angle and wind speed matrix*

## 8 HANDICAPPING

### 8.1 VPP RESULTS AS USED FOR SCORING

#### 8.1.1 VELOCITY PREDICTION

All the calculations performed by LPP and VPP after taking into account Dynamic and Age allowances are eventually used in calculations of speed predictions for 7 different true wind speeds (6-8-10-12-14-16-20 knots) and 8 true wind angles ( $52^\circ - 60^\circ - 75^\circ - 90^\circ - 110^\circ - 120^\circ - 135^\circ - 150^\circ$ ), plus the 2 “optimum” VMG (Velocity Made Good) angles: beating ( $TWA = 0^\circ$ ) and running ( $TWA = 180^\circ$ ), which are calculated obtaining an optimum angle at which the VMG is maximized. The calculations are done for the upwind sails (mainsail and jib or headsail set flying) and downwind for the mainsail with each declared largest off wind sail type (symmetric, asymmetric on pole, asymmetric on centerline and headsail set flying), where the program then chooses the sail combination to produce best speed.

Rated boat velocities in knots							
Wind Velocity	6 kt	8 kt	10 kt	12 kt	14 kt	16 kt	20 kt
Beat Angles	42.8°	41.3°	40.9°	39.8°	39.0°	38.3°	38.3°
Beat VMG	4.06	4.88	5.38	5.64	5.77	5.87	5.98
52°	6.20	7.32	7.87	8.08	8.19	8.25	8.39
60°	6.58	7.64	8.10	8.31	8.42	8.49	8.62
75°	6.91	7.87	8.29	8.55	8.75	8.88	9.03
90°	7.11	8.07	8.50	8.80	9.08	9.28	9.64
110°	6.87	7.95	8.46	8.87	9.33	9.78	10.55
120°	6.50	7.73	8.36	8.80	9.29	9.75	10.72
135°	5.77	7.09	7.99	8.48	8.91	9.44	10.69
150°	4.85	6.01	7.10	7.94	8.42	8.83	9.85
Run VMG	4.20	5.21	6.14	6.94	7.58	8.17	8.99
Gybe Angles	141.5°	146.5°	149.0°	155.0°	166.0°	180.0°	180.0°

TABLE 8.1: Velocity prediction printed on the 1st page of the ORC International certificate

#### 8.1.2 TIME ALLOWANCES

The unique feature of ORC Rating system, making it fundamentally different from any other handicap system and much more precise, is its capacity to give and rate different handicaps for different race conditions because yachts do not have the same performance in different conditions. For example, heavy under-canvassed boats are slow in light airs but fast in strong winds. Boats with deep keels go well to windward and light boats with small keels go fast downwind.

This means that yachts will have a variable time allowance in any race depending on the weather conditions and the course configuration for that particular race as managed by the Organizer.

For the purpose of the Performance Curve Scoring as defined in the ORC Rating Rule 402, velocity predictions are also expressed as time allowances in s/NM where  $TA = 3600/v$ .

From the time allowances calculated for 9 wind angles and 7 wind speeds, two types of pre-selected courses are also available:

1. **Windward/Leeward** is a conventional course around windward and leeward marks where the race course consists of 50% upwind and 50% downwind legs;



Time Allowances in secs/NM							
Wind Velocity	6 kt	8 kt	10 kt	12 kt	14 kt	16 kt	20 kt
Beat VMG	886.1	737.6	668.8	638.7	624.4	613.1	601.9
52°	580.2	491.6	457.4	445.4	439.6	436.4	428.8
60°	547.3	471.5	444.5	433.2	427.6	424.2	417.6
75°	520.8	457.5	434.5	421.0	411.5	405.4	398.8
90°	506.5	446.2	423.6	409.0	396.6	387.9	373.3
110°	524.0	452.6	425.6	405.9	386.0	368.1	341.2
120°	553.7	465.9	430.7	409.0	387.5	369.2	335.7
135°	623.5	508.0	450.3	424.7	403.8	381.5	336.9
150°	742.8	598.6	507.4	453.6	427.5	407.6	365.5
Run VMG	857.7	691.2	585.9	518.5	474.9	440.9	400.2
Selected Courses							
Windward / Leeward	871.9	714.4	627.3	578.6	549.7	527.0	501.1
All purpose	663.6	554.7	501.3	472.7	454.4	438.9	416.9

TABLE 8.2: Time Allowances and Selected Courses on the second page of the ORC International certificate

2. **All Purpose** (formerly named Circular Random) is a hypothetical course type in which the boat circumnavigates a circular island with the true wind velocity held constant;

### WIND AVERAGING

When calculating the GPH, the “wind averaging” operator is applied to the all purpose course, that smooths the individual performance curves for each yacht, taking into account not only each considered wind speed as calculated by the VPP, but a normal distribution across the range that accounts for the 23.58% of the accounted wind speed, 19.8% for 2 kts above and below, 11.73 for +4 kts, 4.89 for +6 kts, and 1.79 for +8 kts.

The wind averaging is not used for the constructed course method.

## 8.2 SIMPLE SCORING OPTIONS

ORC International and ORC Club certificates are also providing simple scoring options using the ratings determined as a single number. The first number is GPH (General Purpose Handicap), which is as an average representation of all time allowances for simple comparisons between boats and possible class division. It is calculated as an average of the time allowances of 8 and 12 knots true wind speed for the all purpose course.

Then two basic simple scoring options are offered in the ORC certificate by default: the *All Purpose* and the *Windward/Leeward*.

Single Number Scoring Options		
Course	Time On Distance	Time On Time
Windward / Leeward	601.8	0.9971
All purpose	486.3	1.2338

TABLE 8.3: Simple scoring options on ORC International &amp; ORC Club certificate

### 8.2.1 TIME ON DISTANCE (ToD)

$$Corrected.time = Elapsed.time - (ToD_{Delta} \times Distance) \quad (8.1)$$

where

$$ToD_{Delta} = ToD_{Boat} - ToD_{Lowest} \quad (8.2)$$

$ToD_{Lowest}$  is the lowest coefficient in the fleet (that of the fastest, scratch boat). The scratch boat will have a corrected time equal to its elapsed time.

The All Purpose and Windward Leeward Time on Distance coefficients are calculated as a weighed average over wind speeds of the handicaps of the respective course model (all purpose or windward leeward). The weights for each wind speed are as follows:

TWS (kt)	6	8	10	12	14	16	20
weight (%)	5	10	20	30	20	10	5

### 8.2.2 TIME ON TIME (TOT)

$$Corrected\_time = ToT \times Elapsed\_time \quad (8.3)$$

Time on Time coefficients are calculated as  $600/ToD$ .

### 8.2.3 TRIPLE NUMBER

$$Corrected\_time = ToT(Low, Medium or High) \cdot Elapsed\_time \quad (8.4)$$

Triple number scoring coefficients are given are given for three wind ranges:

1. Low range (less than 9 knots)
2. Medium range (equal or more than 9 but less than 14 knots)
3. High range (14 or more knots)

The ToT's displayed on the certificate are derived as follows. The three wind velocity ranges (High, Medium, Low) are each comprised of weighted averages of several Time Allowances (s/NM) selected from the familiar seven ORC wind speeds. The “cookbook” recipe for proportions in each of the three wind ranges is given in Table 8.4. The result is a form of wind-averaging for each of the three Triple Number wind ranges:

Wind Speed:	6 kt	8 kt	10 kt	12 kt	14 kt	16 kt	20 kt
Low Range	50.0 %	50.0%					
Med Range		8.33%	33.3%	33.3%	25.0%		
Hi Range					25.0%	37.5%	37.5%

TABLE 8.4: Time allowance weighing table

Once a single weighted average sec/mi Time Allowance has been calculated for each of the three wind ranges, these are converted to a ToT by the formula  $ToT = 600/TA$ .

Offshore Triple Numbers coefficients are calculated using time allowances for the Circular Random type of pre-selected course.

Inshore Triple Numbers coefficients are calculated using time allowances for the Windward/leeward type of pre-selected course.

### 8.2.4 CLASS DIVISION LENGTH (CDL)

In 2014 ITC noted two fundamental issues related to class divisions based on GPH:

1. the low possibility to design fast yachts in lower divisions without being compelled to make them too small to fit in the GPH limits. The consequence is that the winners of the lower divisions are always medium/heavy displacement boats, usually the largest in their class.
2. the first windward leg of the inshore races is a fundamental part of the race and it should be better to have as many boats as possible with similar windward speed in the same class.

In the past, to solve the first issue the smallest boats of the larger class were moved according to a fixed length limit, or conversely pushed up into the larger class with boats exceeding a certain length, but this caused complaints.

To answer the second issue, ITC decided to select the Windward12 (UP 12) handicap instead of using GPH to group boats with similar upwind speeds into the class. To also maintain similar dimensions it was decided to couple the windward speed at TWS=12 kts with the sailing length (IMS L) of each boat.

To couple the two factors (UP12 and IMS L) it was decided to transform the WW12 allowance (that is a speed) in a length and average the obtained length with IMS L. The final factor was named CDL (Class Division Length)

The transformation in length of the UPWIND12 allowance is obtained with the following formulation:

$$VMG_{UP12} = \frac{3600}{UP12} \cdot 0.5144 \quad \text{where } VMG_{UP12} \text{ is boat upwind speed in m/s at 12 kts wind}$$

$$RL = \frac{VMG_{UP12}^2}{Fn^2 \cdot 9.81} \quad \text{where } RL \text{ is rated length and } Fn \text{ is Froude number set at 0.28}$$

The RATED LENGTH is the length that you should have at  $Fn = 0.28$  with the  $VMG_{UP12}$  speed, so it is transforming a speed into a length. Froude number of  $Fn = 0.28$  for upwind VMG was fixed using  $Fn=0.4$  (that is the Froude number at around which maximum displacement speed is obtained) multiplied by  $\cos(45^\circ)$ ,  $45^\circ$  being the average true wind angle upwind.

The Class Division Length is then calculated as follows:

$$CDL = \frac{IMSL + RL}{2} \quad (8.5)$$

The CDL, coupling a speed (or a handicap in sec/mi) and a length, is addressing the problem of mixing handicap and dimensions of boats returning more homogenous classes in terms of dimensions and speed.

# APPENDIX A OFFSETS FILE (.OFF) FORMAT

## A.1 INTRODUCTION TO OFFSET FORMAT 2.0

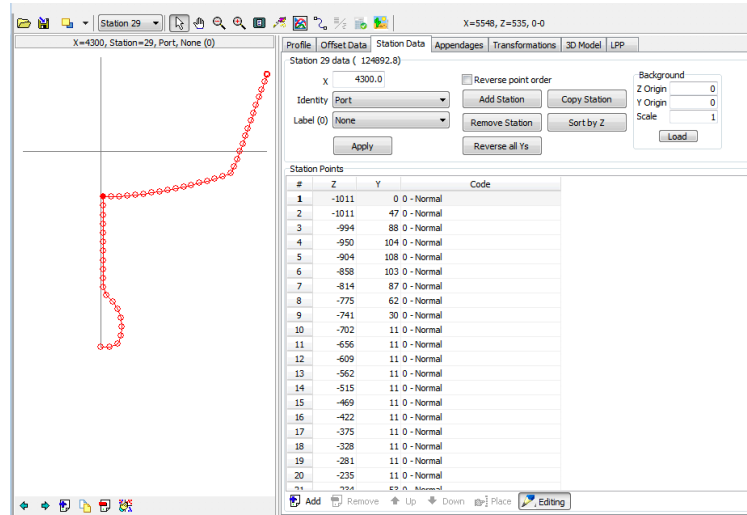


FIGURE A.1: Offsets editing through ORC-Manager application

The traditional offset file format (see below for a detailed description) has been changed in 2021, and a new XML format has been designed. This gives the flexibility of adding new features to the offsets file, like a more detailed description of appendages and superstructures.

The user interacts with the offset file by means of the ORC Manager software, that is handling the user interface offered for any editing and change to the hull and appendages.

The transition from old to new format is transparent to the user: once an offsets file will be modified, it is saved by default in the new format.

## A.2 OFFSET FORMAT - PRE 2021

Offset file describes the shape of the hull together with appendages as a sequence of point measurements arranged in transverse stations. Points along the selected stations are taken from the bottom up with an ORC approved hull measurement device capable to produce a list of the points in the co-ordinate system as follows:

1. X axis – longitudinal with 0 at stem and positive towards the stern
2. Y axis – transverse with 0 at the centerline and positive towards the beam
3. Z axis – vertical with 0 at an arbitrary waterline and positive upwards

Stations are taken at 5% intervals, doubled to 2.5% in the front 15% of the hull. The measurements taken on port and starboard sides are collapsed in the OFF file as if they were on a single side, but they are identified by a station code, which is 1 for starboard and 2 for port. Freeboard stations are measured from both sides. Appendages such as keel and rudder are measured along transverse stations as any other, and extra stations need to be placed at any vertex of appendage in its profile.

Moveable appendages as centerboards, daggerboards and bilgeboards if fitted, don't need to be measured. There is a maximum limit in the LPP of 180 points per station and 180 stations. The LPP may add points and stations internally.

Units may be in decimal feet\*100, or integer millimeters.

OFF file is an ASCII file format with the fields separated by commas and in the required character positions as follows:

First 4 lines are header with general hull data as follows:

```
HH:MM:SS, DD/MM/YY, MEAS#, MACH, FILE, CLASS, 1MMYY
0.000, 0.000, 0.000, 0.000
0.000, 0.000, 0.000, 0.000
NST, LOA, SFJ, SFBI
```

#### LINE 1

Label	Columns	Explanation
HH:MM:SS	1-9	Time of measurement
DD/MM/YY	11-20	Date of measurement
MEAS#	22-26	Measurers code
MACH	28-31	Machine code. (If $\leq 0$ measurements are in ft*100)
FILE	33-39	File name
CLASS	41-64	Class
1MMYY	66-70	Age date with month and year. "1" in front is added for 2000 and following years

#### LINE 2&3 (METRIC SYSTEM)

```
SFFPs, FFPVs, SAFP s, FAPVs
SFFPp, FFPVp, SFFPs, FAPVp
```

Label	Columns	Explanation
SFFPs, SFFPp	1-8	Distance from stem to the forward freeboard station (port & starboard)
FFPVs, FFPVp	10-16	Vertical distance from the forward freeboard station uppermost point to the sheerline where sheer point can not be taken (port & starboard)
SAFPs, SAFPp	18-24	Distance from stem to the aft freeboard station (port & starboard)
FAPVs, FAPVp	26-32	Vertical distance from the forward freeboard station uppermost point to the sheerline where sheer point can not be taken (port & starboard)

#### LINE 2&3 EXPLANATION (US OPTION)

```
-99, FFLAP, FALAP, FGOLAP
LBGLAP, KLEPFG, dummy, dummy
```

In this alternative format that is associated with a number of HMI US machines in line 2 field 1 is a negative number, which means also that measurements are in ft\*100. This is followed by IOR existing freeboard measurements and locations, and the "wing keel" indicator, that usually is defined by a code "4" applied in the wing/bulb widest point. This is obsolete after 2005 due to a different treatment of the wing/bulb keel aerodynamics. The last 2 fields of line 3 are just spare in this optional formatting.

#### LINE 4

Label	Columns	Explanation
NST	6-8	Number of stations
LOA	10-16	Length overall
SFJ	18-24	Distance from the stem to the forward end of J
SFBI	26-32	Stem to mast distance, SFJ + J. This is used to locate the mast to get HBI (Height of sheer at the Base of I).

Note: SFJ and SFBI are set to zero in most files and are not relevant.

## STATIONS DEFINITIONS

The stations are arranged from bow to stern (increasing X) regardless of being port or starboard. The first station should be placed so the stem of the yacht is at  $X=0.0$ . X should never be a negative number. Stations should be taken so that a plot in elevation view of the bottom points of the stations defines all discontinuities in the underwater profile. Stations are needed at all knuckles, where the keel and rudder meet the canoe body, the bottom corners of the keel, bulb and rudder. The maximum thickness of the appendages should also be defined, and a double station in way of the keel is recommended. A station should be taken close to the stem and the extreme aft end of the boat.

Line 5 and the following lines contain information about each section in the following sequence:

```

X, NPT, SID, SCD, sta#
Z (1) ,      Y (1) , PTC
Z (2) ,      Y (2) , PTC
Z (3) ,      Y (3) , PTC
Z (4) ,      Y (4) , PTC
. . .
. . .
Z (NPT) ,    Y (NPT) , 1

```

### FIRST LINE OF EACH STATION

Label	Columns	Explanation
X	1-10	Distance from the stem for each station in millimeters for metric units, in hundredths of feet for imperial units
NPT	12-14	Number of points in a section. Important to be correct.
SID	16-18	Side code: 1-Port; 2-Starboard; 3-Both
SCD	20-22	Station label: 1-Forward freeboard; 2-Aft freeboard; 3-Station contains prop shaft exit point; 4-Station contains propeller hub point
sta#	24-27	Station count, not necessary, but included for convenience

### STATION POINTS DEFINITION

Label	Columns	Explanation
Z(n)	1-10	Vertical co-ordinate for points on a half section, positive up, negative down in millimeters for metric units, in hundredths of feet for imperial units
Y(n)	11-21	Horizontal distance from the centerline for points on a half section. Negative only in the gap in section for example, between the canoe body and the trailing edge where point code PTC is set to 2.
PTC	23-25	Point code as explained below

**POINT CODES:**

- 0 - Normal hull point.
- 1 - Sheer point. If no point on a station has a point code of 1, the top point on the station becomes the sheer point.
- 2 - Poke-through (empty space in a gap bounded by the point immediately above and below. More commonly represented by a Y (transverse offset) of less than -0.3 feet.
- 3 - Propeller or shaft exit point (the appropriate station code having already been entered).
- 4 - Maximum width points of a wing keel.
- 5 - US measurement machine centerline points (has no rating effect).
- 6 - Propeller aperture bottom point (may exist in some old US offset files).
- 7 - Propeller aperture top point (may exist in some old US offset files).
- 8 - Poke-through on the leading edge of an appendage. Most of the time, the program can decide automatically if one or more stations with poke-throughs are leading or trailing edge. If an appendage with leading edge poke-throughs plots incorrectly, this may help.
- 9 - Poke through on the trailing edge of an appendage. If an appendage with trailing edge poke-throughs plots incorrectly, this may help.
- 10 - Poke-through in a closed hole through an appendage. There is no automatic recognition of holes.
- 11 - Poke-through in a contiguous set of stations that all have poke-throughs which completely sever the appendage from the hull. This code will limit the appendage profile to only those points below the poke-throughs.
- 12 - Do NOT clip at this specific point. Use on points which are the inside corner of a left turn while scanning down the section. This is typically used to prevent clips at hard chines with lips or lapstrake type construction.
- 13 - Prevent clipping of entire stations narrower than 3 percent of BMAX by setting this code on any point in the station. This would be typically used on the very tip of a transom that comes to a point. This code will not prevent a clip at a left turn or poke through in the station.
- 14 - If this code is set on any point in the station, you force clipping of the entire station even though it may be wider than 3% of BMAX, and regardless of any poke-throughs and left turns.
- 15 - Do not clip this station in any way, either entirely or at any point if this code is set on any point in the station.
- 16 - Force a clip at this point.

**DOUBLE RUDDER**

Data on the double rudder are entered as an extra input line in the .OFF file. Data input can be made by means of the ORC Manager application.

r_yoff	r_xoff	r_span	r_chordroot	r_chordtip	r_thicknessroot
Y offset	X offset	Rudder Span	Root Chord	Tip Chord	Root thickness
r_thicknesstip	Angle y_off	r_xoff	angle		
Tip Thickness	the stagger from CL of the root. if =0 means single rudder.	longitudinal position of centroid.	lateral inclination angle compared to vertical		

## BIBLIOGRAPHY

- Kerwin J.E. and Newman J.N., A Summary of the H.IRVING PRATT Ocean Race Handicapping Project *Proc. of 4th Chesapeake Sailing Yacht Symposium* ,pp 19-34, Annapolis, MD, 1979;
- Strohmeier D.D, The Measurement Handicapping System of USYRU *Proc. of 4th Chesapeake Sailing Yacht Symposium* ,pp 35-46, Annapolis, MD 1979;
- Hazen G., A Model of Sail Aerodynamics for Diverse Rig Types *Proc. New England Sailing Yacht Symposium* ,New London, CT, 1980;
- Gerritsma I.J., Keuning I.J. and Onnink A.R., The Delft Systematic Yacht Hull (Series II) Experiments, *Proc. of 11th Chesapeake Sailing Yacht Symposium*,Annapolis, MD, 1993;
- Ranzenbach R. and Teeters J., Aerodynamic Performance of Offwind Sails attached to Sprits, *Proc. of 15th Chesapeake Sailing Yacht Symposium*, Annapolis, MD, 2001;
- Teeters J., Ranzenbach R. and Prince M., Changes to Sail Aerodynamics in the IMS Rule, *Proc. of 16th Chesapeake Sailing Yacht Symposium*, Annapolis, MD, 2003;
- Teeters J., Pallard R. and Muselet Caroline, Analysis of Hull Shape Effects on Hydrodynamic Drag in Offshore Handicap Racing Rules, *Proc. of 16th Chesapeake Sailing Yacht Symposium*, Annapolis, MD, 2003;
- Fossati F., Claughton A., Battistin D., Muggiasca S., Changes and Development to Sail Aerodynamics in the ORC International Rule *Proc. of 20th HISWA Symposium*, Amsterdam, 2008;
- Poor C., The IMS, a description of the new international rating system, Washington DC, 1986;
- Claughton A., Developments in the IMS VPP formulations, *Proc. of 14th Chesapeake Sailing Yacht Symposium*, Annapolis, MD, 1999;
- Hoerner F., Fluid Dynamic Drag, *Hoerner Fluid Dynamics* , Bakersfield, CA, 1965;
- World Sailing, Equipment Rules of Sailing, , 2016;